

1. Application Sector

DAMTEC® 3D 17/8 is a mat of rubber granulates with profile for impact sound insulation and for absorption of vibrations and structure borne noise. It can be used for different applications like under floating screed or under machine foundations.

2. Material

High-grade fibres of recycled rubber with PU elastomer bonding agent.

3. Appearance

colour: black
surface: granular texture, with profile on one side

4. Dimensions/Tolerances

width:	1,250 mm	± 1.5 %
length:	8,000 mm	± 1.5 %
thickness:	17/8 mm	± 1.0 mm
density:	500 - 600 kg/m ³	

The data sheet is not subject to any change service! All information is without guarantee.
With the publication of this product data sheet all former issues cease to be valid.

Seite 1 von 3

5. Physical Characteristics

tensile strength:	approx. 0.3 N/mm ²	(EN ISO 1798)
elongation at break:	approx. 40%	(EN ISO 1798)
service temperature range:	- 30°C to 80°C	
flammability rating:	E _{fl}	(EN 13501-1)
dynamic stiffness:	approx. 15 MN/m ³	(EN 29052)
impact sound improvement:	$\Delta L_W = 28\text{dB}$ - one layer under 60mm screed $\Delta L_W = 32\text{dB}$ - two layer under 60mm screed $\Delta IIC = 29\text{dB}$ - one layer under 60mm screed $\Delta IIC = 34\text{dB}$ - two layer under 60mm screed	(ISO 10140 / ISO 717) (ASTM E2179 / E 989)
natural frequency:	12 Hz [at $\sigma = 0.01\text{ N/mm}^2$ with 3 layer]	

6. Installation:

Installation is to be carried out in accordance with the **DAMTEC® 3D** installation instructions.


DISCLAIMER:

The information provided is intended only as a summary and general overview on matters of interest. The information is not intended to be comprehensive nor does it constitute expert advice. KRAIBURG RELASTEC shall not be liable for incidental and/or consequential damages directly or indirectly sustained, nor any loss caused by not complying with relevant industry/product standards and improper use of any Damtec® products. Due to varying construction methods, any other circumstances not stated above should be brought to the attention of KRAIBURG RELASTEC for review. For suitability to the prevailing site conditions, it is advised that certified testing should be conducted. It is recommended to seek further advice on your application with our technical staff prior to use.


The data sheet is not subject to any change service! All information is without guarantee.
With the publication of this product data sheet all former issues cease to be valid.

Seite 2 von 3

7. Spring Characteristic:

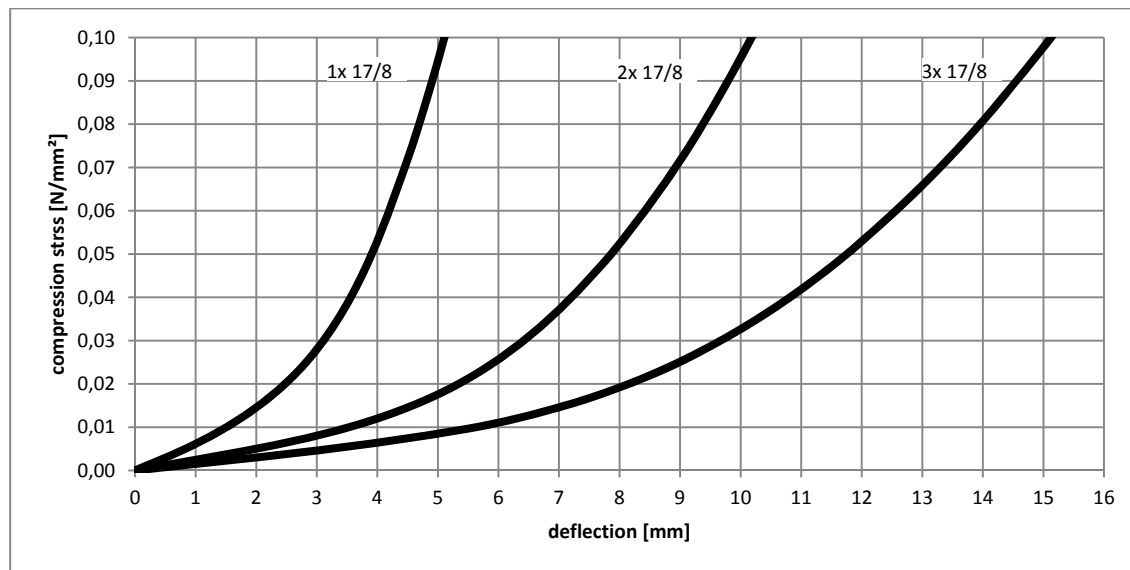

8. Bedding Modulus:

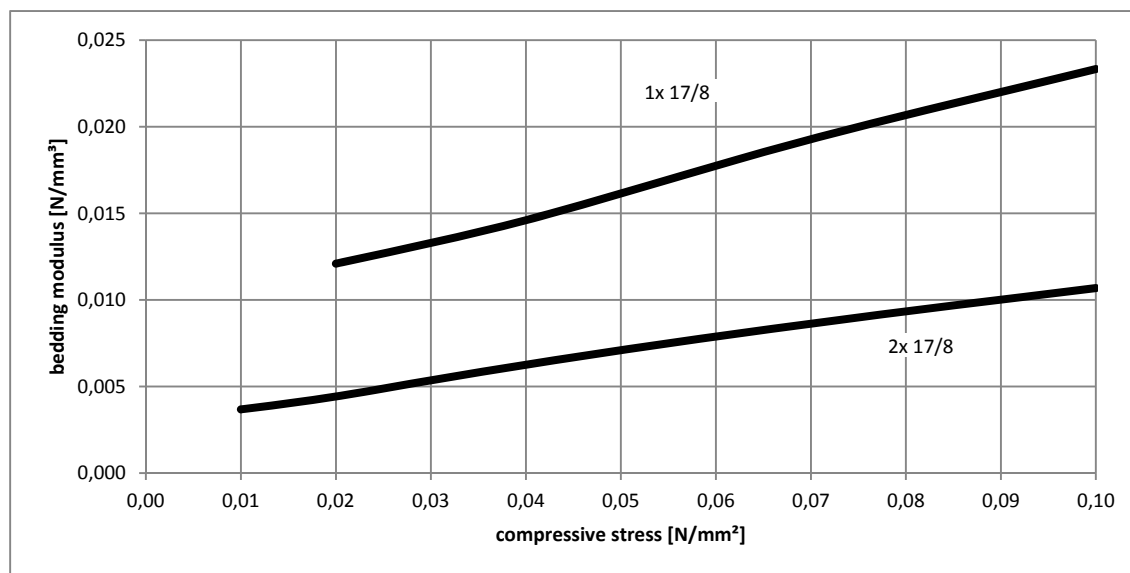

The data sheet is not subject to any change service! All information is without guarantee.
With the publication of this product data sheet all former issues cease to be valid.

Seite 3 von 3