

# Standard Plus



HOMOGENEOUS FLOORCOVERING

VINYL

- > Tiles and sheets in different thicknesses
- > Classic design in refreshed colours
- > Tough and durable
- > PUR surface treatment

**PUR**



# The universal flooring solution

Standard Plus is a range of homogeneous floorcoverings that offer multi-purpose functionality and deliver good value for money. The classic, directional pattern and refreshed colour collection offer great opportunities for creating modern and attractive interiors in commercial areas. Standard Plus is recommended for heavy traffic commercial use, in healthcare premises, schools, shops and similar areas.

## Refreshed colour collection


The 22 new colours are developed to offer a wide range of modern and versatile options, for use in all the different kinds of commercial areas. The colours have a contemporary feel, making every one of them a good choice for a flooring installation that must look up-to-date for many years to come.

## PUR for easy initial maintenance

Standard Plus provides the benefits of a PUR surface, for easier initial maintenance and a good base for future maintenance.

## Great format flexibility

Standard Plus is available in tiles and sheets, in 1.5 and 2 mm thicknesses. This ensures favourable conditions when handling and installing the flooring, and facilitates a perfect result.

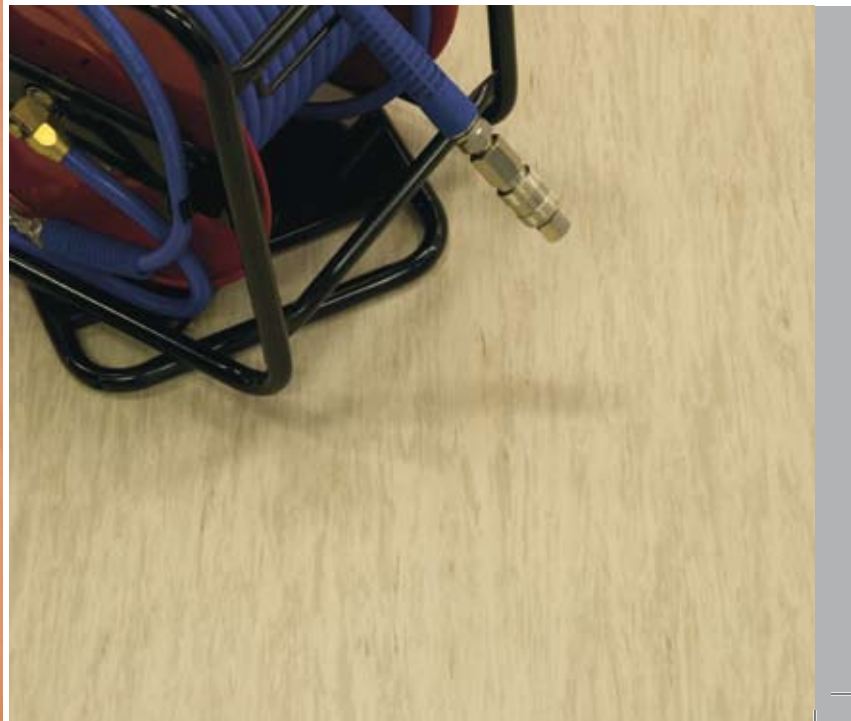

# The Standard Plus colour range



2 mm: 3068 479  
1.5mm: 3067 479  
50x50cm: 3069 479  
61x61cm: 3055 479



2 mm: 3068 480  
50x50cm: 3069 480  
61x61cm: 3055 480



2 mm: 3068 481



2 mm: 3068 482  
1.5mm: 3067 482



2 mm: 3068 483  
50x50cm: 3069 483  
61x61cm: 3055 483



2 mm: 3068 484



2 mm: 3068 485



2 mm: 3068 486  
50x50cm: 3069 486  
61x61cm: 3055 486



2 mm: 3068 487



2 mm: 3068 488



2 mm: 3068 489



2 mm: 3068 490  
1.5mm: 3067 490  
50x50cm: 3069 490  
61x61cm: 3055 490



2 mm: 3068 491  
1.5mm: 3067 491



2 mm: 3068 492  
50x50cm: 3069 492  
61x61cm: 3055 492



2 mm: 3068 493  
50x50cm: 3069 493  
61x61cm: 3055 493



2 mm: 3068 494  
50x50cm: 3069 494  
61x61cm: 3055 494



2 mm: 3068 495




2 mm: 3068 496



2 mm: 3068 497  
1.5mm: 3067 497



2 mm: 3068 498  
1.5mm: 3067 498  
50x50cm: 3069 498  
61x61cm: 3055 498



2 mm: 3068 499  
50x50cm: 3069 499  
61x61cm: 3055 499



2 mm: 3068 500

## Tarkett's Balanced Choice

Standard Plus is part of Tarkett's choice of sustainable solutions, an integrated system that allows for balancing all the competing needs, while making choices that are truly sustainable and work together aesthetically.



### BETTER MATERIALS

*Where we can use renewable resources, we do*



### RESOURCE STEWARDSHIP

*Using fewer resources is good for the environment and the bottom line*





### PEOPLE-FRIENDLY SPACES

*We make floors that help people work, play, shop, heal and learn better*



### REUSE AND RECYCLE


*We find ways to use more recycled content at the start and recycle more product at the end*



# Standard Plus

## DESCRIPTION

Standard Plus is a homogeneous vinyl floorcovering suitable for use in commercial areas. Available in sheet and tile form in 2.0 and 1.5 mm thicknesses. A classic discreet pattern in 22 colourways. Standard Plus is equipped with PUR surface for protection and easier initial maintenance. The PUR also provides a better base for future maintenance procedures.

Technical data		Standard Plus 1,5 mm	Standard Plus 2,0 mm
Type of floorcovering	EN 649	Homogeneous single layered vinyl flooring	Homogeneous single layered vinyl flooring
CE certification		Yes	Yes
Classification	EN 685	Commercial: 32 Industrial: 41	Commercial: 34 Industrial: 43
Wear layer thickness	EN 429	1,5 mm	2,0 mm
PUR		Yes	Yes
Total thickness	EN 428	1,5 mm	2,0 mm
Total weight/m <sup>2</sup>	EN 430	2700 g	3600 g
Dimensional stability	EN 434	≤ 0,40 %	≤ 0,40 % for rolls ≤ 0,25 % for tiles
Abrasion Thickness loss Volume loss	EN 660: Part 1 EN 660: Part 2	Group M: ≤ 0,30 mm Group M: ≤ 7,5 mm <sup>3</sup>	Group M: ≤ 0,30 mm Group M: ≤ 7,5 mm <sup>3</sup>
Residual indentation	EN 433	Approx. 0,06 mm	Approx. 0,06 mm
Castor chair test	EN 425	Suitable	Suitable
Static electrical charge	EN 1815	< 2 kV	< 2 kV
Underfloor heating		Suitable – max. 27° C	Suitable – max. 27° C
Impact sound resistance	EN ISO 717/2	–	Approx. + 4 dB
Thermal resistance	EN 12667/DIN 52612	–	Approx. 0,01 m <sup>2</sup> K/W
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B <sub>1</sub> s1 ≥ 8 kW/m <sup>2</sup> Pass	Class B <sub>1</sub> s1 ≥ 8 kW/m <sup>2</sup> Pass
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	–	
Light fastness	EN ISO 105-B02	≥ level 6	≥ level 6
Chemical resistance	EN 423	Good resistance	Good resistance
Fungi and Bacteria resistance	DIN EN 846-A/C	Does not favour growth	Does not favour growth
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0,3	R9 ≥ 0,3
Colours		6 for rolls –	20 for rolls 10 for tiles
Form of delivery	EN 426 Sheet (rolls)  EN 427 Tiles (box)	Approx. 25 r m x 200 cm art. no. 3067_ _ _ 3 digit colour number	Approx. 20 r m x 200 cm art. no. 3068_ _ _ 3 digit colour number  50 x 50 cm 24 tiles/box=6,00 m <sup>2</sup> art. no. 3069_ _ _ 3 digit colour number  61 x 61 cm 14 tiles/box=5,21 m <sup>2</sup> art. no. 3055_ _ _ 3 digit colour number

NCS CODES AND WELDING RODS		
Colour N°	Welding rod N°	NCS-no
479	1287 160	S 2010-Y40R
480	1289 803	S 2005-Y40R
481	1287 437	S 4005-Y50R
482	1287 373	S 5005-Y50R
483	1287 039	S 2010-Y20R
484	1287 438	S 2020-Y20R
485	1287 439	S 2040-Y30R
486	1287 440	S 4020-Y50R
487	1288 325	S 2040-Y50R
488	1287 441	S 3060-Y80R
489	1287 442	S 2030-G40Y
490	1287 295	S 3020-G30Y
491	1287 047	S 1515-R90B
492	1291 210	S 3020-R90B
493	1287 281	S 4030-R90B
494	1294 701	S 2502-G
495	1294 071	S 4000-N
496	1287 333	S 6005-Y20R
497	1287 338	S 1500-N
498	1287 027	S 3502-B
499	1287 394	S 5502-B
500	1287 314	S 8502-B



The information is subject to modification for the benefit of further improvement (06/09). For more detailed technical information, please contact Tarkett. Please follow Tarkett's installation and maintenance instructions, included on the packaging, carefully.

Printed on PEFC paper PEFC® C012327  
Standard Plus product brochure - English - 3068350905 - Publishing Altavia Paris - 07/09



TARKETT SALES COMPANIES

www.tarkett-commercial.com

> **Australia:** Tarkett Australia Pty Ltd – Tel. +61 2 8853 1200 > **Austria:** Tarkett Holding GmbH, Niederlassung Wien – Tel. 01 47 88 062 > **Baltic States:** Tarkett SAS – Tel. +370 37 262 220 > **Belgium:** S.A. Tarkett NV – Tel. +32 16 35 98 80 > **China:** Tarkett Asia Pacific Limited Shanghai Representative Office – Tel. +86 (21) 60 95 68 38 > **Czech Republic:** Tarkett SAS, org. slozka – Tel. +420-271 001 602 > **Denmark:** Tarkett A/S – Tel. +45 43 90 60 11 > **Finland:** Tarkett Oy – Tel. +358 9 5406 5870 > **France:** Tarkett France – Tel. +33 1 41 20 42 49 > **Germany:** Tarkett Holding GmbH, Bereich Objekt – Tel. +49 6233 810 > **Greece:** Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 > **Hong Kong:** Tarkett Asia Pacific Ltd. – Tel. +852 2511 8716 > **Hungary:** Tarkett SAS – Tel. +36 1 437-8150 > **Italy:** Tarkett S.p.A. – Tel. +39 02 893 411 > **Luxembourg:** Tel. +352 949 211 8804 > **Middle East:** Tarkett Middle East – Tel. +961 1 51 3363/4 > **Netherlands:** Tarkett Nederland – Tel. +31 76 57 80 760 > **Norway:** Tarkett AS – Tel. +47 32 20 92 00 > **Poland:** Tarkett Wykladziny Sp. z o.o. – Tel. +48 22 639 31 66 > **Portugal:** Tarkett SA – Tel. +351 21 427 64 20 > **Russian Federation:** Tarkett Russia – Tel. +7 4 95 777 69 83 > **Slovakia:** Tarkett SAS – Tel. +421 34 774 12 09 > **Singapore:** Tarkett Far East – Tel. +65 67 43 53 84 > **South East Europe:** Tarkett Trade d.o.o. – Tel. +381 21 7557 649 • (44) 569 12 21 > **Spain:** Tarkett Floors S.L – Tel. +34 91 358 00 35 > **Sweden:** Tarkett Sverige AB – Tel. +46 771 25 19 00 > **Switzerland:** Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 043 233 79 24 > **Ukraine:** Tarkett UA – Tel. +380380 (44) 569 12 21 > **United Kingdom:** Tarkett Ltd – Tel. +44 (0) 1622 854 040 > **North America:** Johnsonite – Tel. +1 440 543 8916 > **Tarkett Inc. USA** – Tel. +1 713 869 5811 > **Tarkett International:** Tel. +49 6233 811 755 – Tel. +33 1 41 20 41 01