

The logo for 'bond it' is displayed in a bold, sans-serif font. The word 'bond' is in black, and 'it' is in white, both contained within a blue swoosh that curves around the letters.

**bond it**



NEVER COMPROMISE ON **QUALITY!**



SPECIALISTS IN THE SUPPLY OF AN EXTENSIVE RANGE OF MATERIALS TO  
THE MERCHANT, DIY, GLAZING, PLUMBING, TILING AND ROOFING SECTORS.

**PRODUCTCATALOGUE**

## MANUFACTURERS AND SUPPLIERS OF:

- SILICONE & ACRYLIC SEALANTS
- BUILDING CHEMICALS
- ADHESIVES
- PLUMBING CHEMICALS
- TILE ADHESIVES & GROUTS
- POLYURETHANE FOAMS
- BITUMEN COMPOUNDS
- LOCKS & LATCHES
- DOOR FURNITURE

## NEVER COMPROMISE ON QUALITY!



**BOND IT IS ONE OF THE UK'S LARGEST INDEPENDENT MANUFACTURERS OF BUILDING AND CONSTRUCTION MATERIALS, HAVING BUILT UP A RECOGNISED AND TRIED AND TESTED BRAND FOR MORE THAN A DECADE.**

Successfully supplying specialist products to the construction industry, DIY, glazing, roofing, ironmongery and merchant sectors both in the UK and worldwide, the relationship between suppliers and customers continues to strengthen.

Bond It's portfolio comprises a comprehensive range of high quality silicones and sealants, construction adhesives, building chemicals, bitumen compounds, plumbing solutions, tile adhesives, landscaping materials, door furniture and polyurethane foams. All bearing a name you can trust!

Year on year Bond It reinvests profit into plant, warehousing and machinery, ensuring efficiency and productivity are unsurpassed. This in turn helps to keep prices down, wherever possible, enabling the Company to work to tight deadlines and allowing Bond It to offer its whole range ex-stock.

State of the art machines for blending, filling and manufacturing guarantee the best quality products are supplied and a purpose built warehouse facility ensures 99% stock availability, rapid turn around of sales orders and guaranteed deliveries.

All products manufactured at Bond It are done so to a stringent quality control system accredited to ISO 9001 and 14001 by the British Standards Institute. Many products are actually manufactured to National, European and International standards, including CE approved product classification. A dedicated QC department checks all raw materials through to finished goods ensuring product specifications meet the requirements of the end user to the highest level.

Recognition of environmental management is a key responsibility for the Company. Bond It continually improves environmental performance and encourages the development of products and processes that are both safe and have low impact on the environment. Bond It's mission statement is to pursue a process of brand development and product innovation, whilst providing exceptional quality and service at competitive prices!



Cert No: 6152  
ISO 9001  
ISO 14001



- HIGH PERFORMANCE PRODUCTS
- COMPETITIVE PRICING
- CE APPROVAL
- ENVIRONMENTAL AWARENESS
- ISO ACCREDITATION
- GLOBAL DISTRIBUTION NETWORK
- STATE OF THE ART MACHINERY

**NEVER COMPROMISE ON QUALITY!**

## MATE RANGE

|                                                 |       |
|-------------------------------------------------|-------|
| Silicone Sealants .....                         | 8-11  |
| Specialist Sealants & Decorators Sealants ..... | 12-13 |
| Contractors Silicones .....                     | 14    |
| Construction Adhesives .....                    | 15-17 |
| Water-based Sealants & Decorators Fillers ..... | 17-19 |
| Silicone Remover .....                          | 19    |
| Polyurethane Foams & Applicator Guns .....      | 20-21 |
| Sealant Guide .....                             | 22-24 |

## PREMIERE RANGE

|                                                       |           |
|-------------------------------------------------------|-----------|
| Silicone Sealants including Fire Rated Products ..... | 26-34, 37 |
| Gist .....                                            | 35        |
| Reload .....                                          | 36        |
| Polyurethane Foams & Applicator Guns .....            | 31, 37-39 |
| Sealant Guns .....                                    | 40-41     |

## DECORATORS RANGE

|                                      |       |
|--------------------------------------|-------|
| Stain Block .....                    | 45    |
| Fillers .....                        | 45-46 |
| Dust Sheets & Floor Protectors ..... | 47-48 |
| Sealants & Adhesives .....           | 49-51 |
| Saves Nails Tape .....               | 52    |

## ADHESIVES

|                                 |       |
|---------------------------------|-------|
| Construction Adhesives .....    | 54-56 |
| Specialist Glues .....          | 57-58 |
| PVA .....                       | 58-59 |
| GB Pro Adhesive & Sealant ..... | 60-61 |
| Polyurethane Adhesives .....    | 62-63 |
| Industrial Adhesives .....      | 63-66 |

## TILE ADHESIVES & GROUTS

|                                      |       |
|--------------------------------------|-------|
| Ready Mixed Adhesives & Grouts ..... | 68-70 |
| Powder Adhesives & Grouts .....      | 71-75 |
| Primer .....                         | 75    |

## BUILDING CHEMICALS

|                                  |        |
|----------------------------------|--------|
| Building Chemicals & Mixes ..... | 78-84  |
| Concentrates .....               | 85-86  |
| Oil & Preparatory Products ..... | 86-90  |
| Fire Cement .....                | 91     |
| Levelling Compounds .....        | 92-94  |
| Cleaning Products .....          | 96-97  |
| Tapes & Paints .....             | 98-101 |

## CLEAN IT RANGE

|                                       |         |
|---------------------------------------|---------|
| Household Cleaners & Degreasers ..... | 104-110 |
|---------------------------------------|---------|

## ECO RANGE

|                                     |         |
|-------------------------------------|---------|
| Environmentally Safe Cleaners ..... | 112-113 |
|-------------------------------------|---------|

## DRIVE ALIVE RANGE

|                                      |         |
|--------------------------------------|---------|
| Surface Cleaners .....               | 117     |
| Surface Enhancers .....              | 118-121 |
| Paving Joint Fillers & Sealers ..... | 122-123 |
| Decking Cleaners & Oils .....        | 124     |
| Landscape Membranes .....            | 125     |

## BITUBOND RANGE

|                             |         |
|-----------------------------|---------|
| Bitumen Compounds .....     | 128-133 |
| DPC & Flashing Tape .....   | 134-135 |
| Waterproofing Systems ..... | 136-137 |

## PLUMBERS COMPLETE RANGE

|                          |         |
|--------------------------|---------|
| Plumbing Solutions ..... | 140-145 |
|--------------------------|---------|

## FLOORING

|                                    |         |
|------------------------------------|---------|
| Flooring Adhesives & Primers ..... | 148-154 |
|------------------------------------|---------|

## RESCUE & REPAIR

|                   |         |
|-------------------|---------|
| Rescue Tape ..... | 156-157 |
|-------------------|---------|

## OTHER INFORMATION

|                                                         |         |
|---------------------------------------------------------|---------|
| Merchandising / Technical Information / T's & C's ..... | 160-192 |
|---------------------------------------------------------|---------|

## PRODUCT INDEX

|       |         |
|-------|---------|
| ..... | 193-195 |
|-------|---------|

## COLOUR GUIDE & KEY

|       |         |
|-------|---------|
| ..... | 198-199 |
|-------|---------|

MATE

PREMIERE

DECORATORS

ADHESIVES

TILE ADHESIVES

BUILDING

CLEAN IT

ECO

DRIVE ALIVE

BITUBOND

PLUMBING

FLOORING

RESCUE



# MEGA FOAM

THE PROFESSIONALS CHOICE



HAND & GUN GRADE  
PU FOAM IN 1 CAN

**bond it**

A UK Manufacturer

**WE'VE GOT IT! BOND IT!!**

**bond it**

## MATERANGE

A DIY ORIENTATED RANGE OF SILICONE  
AND WATER-BASED SEALANTS FOR  
JOBS AROUND THE HOME.



# MATE RANGE

- SILICONES & SEALANTS
- CARTRIDGE ADHESIVES
- POLYURETHANE FOAMS & FOAM GUNS
- DECORATORS SEALANTS
- SEALANT GUIDE
- CE APPROVAL

COLOUR GUIDE & ICON KEY - P. 198-199

## ULTI-MATE BUILDERS SILICONE

A low modulus neutral cure (LMN) builders silicone sealant. Suitable for internal and external applications. It has primerless adhesion to most construction materials and remains permanently flexible for up to 25 years. Conforms to EN15651-1; F EXT-INT.

**APPLICATION:** Suitable for sealing around doors and windows and for general building maintenance. It can be used to fix mirrors, perimeter glazing applications, cap beading and glass. Also ideal for expansion and joint sealing to precast concrete, mortar, plaster, metals and brickwork.

**PRODUCT SPEC:**     

| CODE  | COLOUR                                                                                 | SIZE | QTY | BARCODE       |
|-------|----------------------------------------------------------------------------------------|------|-----|---------------|
| BDUBL |  BL | EU3  | 25  | 5060021367006 |
| BDUBR |  BR | EU3  | 25  | 5060021361455 |
| BDUGR |  GR | EU3  | 25  | 5060021362254 |
| BDUT  |  T  | EU3  | 25  | 5060021361479 |
| BDUWH |  WH | EU3  | 25  | 5060021361486 |

## MULTI-MATE MULTI-PURPOSE SILICONE

A multi-purpose, high modulus, acetoxo (HMA) silicone rubber sealant which contains fungicide. Suitable for most sealing jobs around the home both inside and out. Permanently flexible and skins in minutes. Conforms to EN15651-1,3; F EXT-INT, S1.

**APPLICATION:** Suitable for sealing and waterproofing in areas of high humidity. It has excellent adhesion to glass, glazed surfaces, ceramic tiles, many plastics and most paints. Remains flexible for up to 20 years.

**PRODUCT SPEC:**      

| CODE  | COLOUR                                                                                   | SIZE | QTY | BARCODE       |
|-------|------------------------------------------------------------------------------------------|------|-----|---------------|
| BDBL  |  BL | EU3  | 25  | 5060021362261 |
| BDBR  |  BR | EU3  | 25  | 5060021361424 |
| BDMGR |  GR | EU3  | 25  | 5060021362278 |
| BDMT  |  T  | EU3  | 25  | 5060021361431 |
| BDMWH |  WH | EU3  | 25  | 5060021361448 |





## PRO-MATE GLAZING SILICONE

An advanced, low modulus acetoxo (LMA) silicone sealant. Suitable for exterior and interior applications, where the joint movement does not exceed 20% and where the long term durability of silicone is required.

Conforms to EN15651-1,2; F EXT-INT, G 20LM.

**APPLICATION:** Suitable for perimeter sealing and waterproofing around door and window frames and for general building maintenance.

**PRODUCT SPEC:**     

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDPMBR | BR     | EU3  | 25  | 5060021362230 |
| BDPMT  | T      | EU3  | 25  | 5060021364869 |
| BDPMWH | WH     | EU3  | 25  | 5060021361936 |

**DID YOU KNOW... YOU CAN ALSO VIEW OUR FULL RANGE OF PRODUCTS ONLINE:**  
[WWW.BOND-IT.CO.UK](http://WWW.BOND-IT.CO.UK)



## GLASS-MATE MIRROR ADHESIVE

A low modulus neutral cure (LMN) silicone for interior mirror fixing. Has excellent unprimed adhesion on most mirror coatings and has outstanding resistance to heat and humidity. Not affected by sunlight, ultra-violet radiation and temperature extremes. This product will accommodate thermal expansion and is non-corrosive and odourless.

**APPLICATION:** Suitable for internal bonding of mirrors, coated glass, glazed surfaces, ceramics, enamel, metals, PVCu, polycarbonate and treated or untreated wood, to most common substrates. **Note:** Not suitable for use in the manufacture of structural glazing or for use with safety glass mirrors.

**PRODUCT SPEC:**



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDMIRT | T      | EU3  | 12  | 5060021363695 |



## BUILD-MATE BUILDING MASTIC

A traditional oil based, gunable pointing and sealing mastic for general exterior building use. Offers superior adhesion to all building surfaces and can be over-painted when cured with most conventional oil based paints. Weatherproof in most applications. Sag resistant and low toxicity. **Note:** Not suitable for use with uPVC.

**APPLICATION:** Can be used to seal and bed window and door frames manufactured from metal or wood. It can also be used for the maintenance of low rise building joints, seals and flashing and for pointing around precast building materials.

**PRODUCT SPEC:**



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDOBRR | BR     | EU3  | 25  | 5060021361578 |
| BDOBST | ST     | EU3  | 25  | 5060021361585 |
| BDOBWH | WH     | EU3  | 25  | 5060021361592 |

## FLASH-MATE LEAD SEALANT

A fast skinning roofing sealant that reduces weather ingress, tile lift and noise. Tough, resilient and compatible with lead. Conforms to EN15651-1; F INT.

**APPLICATION:** Can be used to bond glass and glazing plastics as well as small sections of roofing materials under repair. Ideally suited for sealing roof lights, conservatories, soffits, glass houses, industrial roofing systems, lead flashings and to prevent tile lifting and wind noise. Also has excellent UV, heat and ozone resistance and sets to a tough, resilient rubber seal. Also suitable for use on metals, concrete, mortar and plaster.

**PRODUCT SPEC:**     

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDLEAD | GR     | EU3  | 25  | 5060021363466 |



### PATINATION OIL

FOR PROTECTING NEW AND RESTORED LEADWORK

- USE ON ALL NEWLY INSTALLED LEAD WORK
- HELP PREVENT UNSIGHTLY STAINING
- IMPROVES APPEARANCE AND HELPS TO AGE LEAD NATURALLY

SEE PAGE 87





## RAIN-MATE ALL WEATHER SEALANT

A superior and highly flexible, water repellent, general purpose sealant that has excellent adhesion to all surfaces, even when damp. This product can be over-painted with certain paints and it will not crack or slump or become brittle with age.

**APPLICATION:** Suitable for use on brick, concrete, stone, all metals, painted or bare wood, glass, vinyl and most plastics. Being rubber based this sealant is compatible with bitumen, asphalt and roofing felt and is ideal for roof repairs in damp conditions (any standing water must be removed before application). Can also be used to seal doors, windows, roofs, cladding and vehicle bodies.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDAWSBL | ● BL   | EU3  | 25  | 5060021362612 |
| BDAWSCL | ⊗ CL   | EU3  | 25  | 5060021360502 |
| BDAWSWH | ○ WH   | EU3  | 25  | 5060021362629 |



## ROOF-MATE ROOF & GUTTER SEALANT

A polymerically reinforced lap jointing sealant and adhesive used to prevent leaks in gutters and downpipes. Forms a flexible seal.

**APPLICATION:** Suitable for repairing and maintaining general roofing, roof drainage systems and cracked down pipes, etc. It is ideal for use on metal, construction grade plastics, paint, stone, timber, brick, bitumens and asphalt.

### PRODUCT SPEC:



| CODE | COLOUR | SIZE | QTY | BARCODE       |
|------|--------|------|-----|---------------|
| BDR  | ● BL   | EU3  | 25  | 5060021361608 |

**DID YOU KNOW...** ALL BOND IT SILICONE SEALANTS CARRY THE CE APPROVED PRODUCT CLASSIFICATION FOR QUALITY.



## LAMI-MATE TIMBER & LAMINATE SEALANT

A polymer enhanced, flexible sealant and gap-filler designed for sealing all tongue and groove laminate and hardwood flooring. Remains permanently flexible and can be over-painted, stained or varnished for colour matching purposes, once cured. Conforms to EN15651-1; F INT.

**APPLICATION:** Can be used for draught-proofing around timber flooring to provide an effective dust and air tight seal. It can also be used for sealing around all types of fitted furniture i.e. bedroom and kitchen fittings, laminate worktops, etc. Also suitable for sealing glass panels into kitchen unit doors.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDSBC   | ● BC   | EU3  | 12  | 5060021362650 |
| BDSOK   | ● OK   | EU3  | 12  | 5060021362667 |
| BDSLSPN | ● PN   | EU3  | 12  | 5060021362643 |



## COVE-MATE COVING ADHESIVE

A high strength, solvent-free, gap-filling, coving and decorating adhesive. Quick grab and suitable for interior coving and decorative mouldings. Can replace mechanical fixings in a multitude of home improvement applications. Dries to a white finish and can be over-painted once dry.

**APPLICATION:** Ideal for fixing polystyrene and PU covings, skirting boards, architraves and dado rails, etc. It can be used internally on plaster, brick and stone. It is also suitable for bonding work tops to base units and for bonding cork tiles and cork sheet. **Note:** Not suitable for polythene, polypropylene, teflon, nylon or plaster coving.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDCMWH | ○ WH   | EU3  | 12  | 5060021364678 |





## GP200 GENERAL PURPOSE SILICONE

A general purpose, contractors grade acetoxo silicone sealant with fungicide, suitable for most sealing jobs around the home. Quick curing and mould resistant.

Conforms to EN15651-1,3; F EXT-INT, S1.

**APPLICATION:** Suitable for sealing and water-proofing in areas of high humidity. It has excellent adhesion to glass, glazed surfaces, ceramic tiles, many plastics and most paints. It is ideal for applications in bathrooms, shower rooms, utility rooms and general DIY applications including kitchen work tops. **Note:** Not suitable for fixing of mirrors or sealing natural stone or marble. This product should not be used with aquaria or on bitumen or asphalt.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDSVBL | ● BL   | EU3  | 25  | 5060021368188 |
| BDSVBR | ● BR   | EU3  | 25  | 5060021361493 |
| BDSVT  | ⊗ T    | EU3  | 25  | 5060021361509 |
| BDSVWH | ○ WH   | EU3  | 25  | 5060021364104 |

# SAVES NAILS



## OUR SAVES NAILS RANGE INCLUDES SOLVENT BASED AND SOLVENT-FREE ALTERNATIVES

### SAVES NAILS SOLVENT-FREE

Offering less impact on the environment, this solvent-free formula offers instant grab and a tough permanent bond on virtually any porous or non-porous surface. A low odour, water clean-up construction adhesive which cures to form a high strength bond. Extremely low VOC content. Contains no harmful raw materials, making it safer for the environment, safe for the user and safe on substrates. **Note:** Recommended for internal use only.

**APPLICATION:** Ideal for fixing panelling, plasterboard, cove base, window sills, styrofoam, carpet tack strips, aluminium furring strips, tub surrounds, fireplaces, loose floor/wall tiles, plywood, aluminium, steel, wood, concrete, cork, general repairs to wood, fixing hardboard and plywood and as a general adhesive.

### PRODUCT SPEC:



| CODE  | COLOUR | SIZE | QTY | BARCODE       |
|-------|--------|------|-----|---------------|
| BDPGE | ○ WH   | EU3  | 25  | 5060021360564 |



## REVIVE YOUR DRIVE



VISIT THE DRIVE ALIVE WEBSITE FOR MORE INFORMATION ON  
**WWW.YOURDRIVEALIVE.CO.UK**

# SAVES NAILS

**TOLUENE  
FREE**

**AN INSTANT GRAB,  
NON-SLUMPING, MULTI-PURPOSE  
BUILDING ADHESIVE WITH GAP-  
FILLING PROPERTIES THAT WILL  
BRIDGE GAPS UP TO 12MM.**

## APPLICATION:

Suitable for interior and exterior use on most common building materials including brick, ceramics, glass, metals, plaster, plastics, wood and stone. Replaces mechanical fixing in a variety of DIY applications.

**Note:** Toluene Free Formulation!

## PRODUCT SPEC:



| CODE  | COLOUR | SIZE | QTY | BARCODE       |
|-------|--------|------|-----|---------------|
| BDSN2 | BG     | EU3  | 25  | 5060021366597 |



**NEW POLYAMIDE CARTRIDGE**

## SAVES NAILS DOUBLE SIDED ADHESIVE TAPE

Extra strong double sided, water-resistant adhesive tape for interior and exterior use. Ideal for mounting on ceramic tiles, painted surfaces, glass, metal and plastics. Good for bonding badges, name tags, protective mouldings, interior mirrors and other light weight items. Excellent adhesion to metals, glass, painted surfaces and many plastics. Not recommended for use on vinyl wallpaper, stone, wood or dusty surfaces.



**APPLICATION:** Simply cut to the required length and apply using firm pressure to the item to be stuck. Load Capacity: 40Kg per m of tape.

## PRODUCT SPEC:



| CODE   | COLOUR | SIZE        | QTY | BARCODE       |
|--------|--------|-------------|-----|---------------|
| BDSN2T | CL     | 19MM X 1.5M | 1   | 5060021369918 |

## BATH-MATE BATHROOM & KITCHEN SEALANT

A high quality, water-based sealant with good adhesion to plastic, ceramic tiles and porcelain. Remains permanently flexible and forms a watertight seal to most surfaces. Contains a powerful anti-fungal compound to retard mould growth. Can be over-painted, stained or varnished for colour matching purposes. Conforms to EN15651-1,3; F EXT-INT, S1.

**APPLICATION:** Suitable for sealing around baths, sinks and worktops. Can also be used as a grout repair.

## PRODUCT SPEC:



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDBAWH | WH     | EU3  | 25  | 5060021361554 |

**DID YOU KNOW... MOST MOULD GROWTHS ON SEALANT ARE CAUSED BY EXCESS SOAP DEPOSITS. REGULAR CLEANING WITH BOND IT MOULD STOP WILL RETARD BUILD UP.**





## DEC-MATE FLEXIBLE FILLER

A quick drying interior decorators filler that can be smoothed and over-painted within 1-2 hours of application. Adheres to most surfaces and being flexible will allow low movement in joints between different materials or substrates.

**APPLICATION:** For filling gaps and cracks in skirting boards, ceilings, stair risings, fitted furniture and light fittings. Also for filling interior cracks and damage in plaster, brick, concrete and plasterboard. Can be over-painted with emulsion paint as soon as a skin forms, after approximately 1 hour. For oil based paints allow to dry completely for 24-48 hours before over-painting. **Note:** Not recommended for external use, for uPVC or in wet areas.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDDM    | WH     | EU3  | 25  | 5060021361523 |
| BDDF400 | WH     | EU4  | 25  | 5060021360540 |



## CAULK-MATE DECORATORS CAULK


A rapid drying, interior decorators caulk. Remains permanently flexible and can be smoothed and over-painted within 1-2 hours of application. Has good adhesion to most building materials.

**APPLICATION:** Suitable for sealing and filling cracks in most "alike" materials, such as skirting boards, plastics and polystyrene coving. **Note:** Not recommended for external use, for UPVC or in wet areas.

### PRODUCT SPEC:



| CODE     | COLOUR | SIZE | QTY | BARCODE       |
|----------|--------|------|-----|---------------|
| BDOHC300 | WH     | EU3  | 25  | 5060021364951 |
| BDOHC400 | WH     | EU4  | 25  | 5060021364968 |



## FRAME-MATE DOOR & WINDOW SEALANT

A high quality, water-resistant, water based frame sealant with good adhesion to most building materials. Easy to clean, flexible joint filler which can be over-painted, stained or varnished for colour matching purposes. **Conforms to EN15651-1; F EXT-INT.**

**APPLICATION:** Suitable for sealing around door and window frames and soffit boards with limited movement. It can also be used for filling cracks and joints with low movement. **Note:** Not suitable for uPVC.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDFMBR | BR     | EU3  | 25  | 5060021361530 |
| BDFMWH | WH     | EU3  | 25  | 5060021361547 |

## DE-BOND MATE SILICONE SEALANT REMOVER

A non-drip gel formula for the complete removal of cured silicone sealant, particularly when silicone has been accidentally smeared over glass, ceramics or counter tops. Removes all types of silicone and sealant by breaking up and digesting the material, leaving surfaces clean and ready for re-sealing.

**APPLICATION:** Used to remove old silicone sealant during renovations. It is suitable for use on brick, concrete, metals, glass, PVCu, melamine laminates and acrylic. Ideal for use on baths, kitchen work tops, basins, showers, doors and window frames. Apply using a standard sealant gun (BDCG300).

### PRODUCT SPEC:



| CODE     | COLOUR | SIZE  | QTY | BARCODE       |
|----------|--------|-------|-----|---------------|
| DBON1125 | P      | 125ML | 6   | 5060021369406 |







## FILL AND FIX EXPANDING PU FOAM

Expanding foam that is based on a moisture curing polyurethane prepolymer. Quick, economic and easy to apply. Improves draught and heat insulation, fills irregular gaps, fixes framework and deadens sound. Can be cut, sawn, plastered and sealed over once cured. Available in 500ml and 750ml aerosol cans or 750ml gun grade canister which can be used with a standard gun foam applicator.

Conforms to DIN4102 Class B3.

(Foam rating for products with no fire resistant additives or properties).

**APPLICATION:** For fitting doors, windows and insulating pipes and filling gaps and can reduce the need for mechanical fixings.

- Window setting (where a clean and controlled backfill is required).
- Entrance door linings.
- Any kind of small break-throughs in walls and other cavities.
- Can yield up to 40 times can volume.

### PRODUCT SPEC:



| CODE     | COLOUR | SIZE  | QTY | BARCODE       |
|----------|--------|-------|-----|---------------|
| BDFIX500 | BG     | 500ML | 12  | 5060021361899 |
| BDFIX750 | BG     | 750ML | 12  | 5060021361905 |
| BDFIX750 | BG     | 750ML | 12  | 5060021361912 |



USE WITH BDAG1 OR BDAK45 FOAM APPLICATORS

## PROFESSIONAL GUN FOAM APPLICATOR



- HEAVY DUTY FOR PROFESSIONAL USE
- STEEL BALL VALVE
- VARIABLE EXTRUSION RATE
- TUV SAFETY CLASSIFICATION

A TOP QUALITY METAL GUN FOR USE WITH GUN GRADE POLYURETHANE EXPANDING FOAMS. SCREWS ONTO THE CANISTER FOR QUICK AND EASY APPLICATION.

| CODE  | COLOUR | SIZE      | QTY | BARCODE       |
|-------|--------|-----------|-----|---------------|
| BDAG1 | SILVER | UNIVERSAL | 1   | 5060021362100 |

## HEAVY DUTY GUN FOAM APPLICATOR



- PTFE BALL VALVE
- VARIABLE EXTRUSION RATE
- CE SAFETY CLASSIFICATION

A PROFESSIONAL GUN FOR DELIVERING POLYURETHANE FOAM. MADE ENTIRELY OF METAL, IT IS ROBUST AND EASY TO HANDLE WITH ITS ERGONOMIC HANDGRIP MADE OF ANTI-SOLVENT NYLON. BODY, ADAPTOR, NON-RETURNABLE VALVE AND NOZZLE ARE TEFLON COATED TO PREVENT FOAM FROM STICKING TO THE GUN AND FACILITATE CLEANING. EXCEPTIONALLY HARD WEARING GUN PARTS - THIS IS A GUN FOR LIFE!!

| CODE   | COLOUR | SIZE      | QTY | BARCODE       |
|--------|--------|-----------|-----|---------------|
| BDAK45 | BLACK  | UNIVERSAL | 1   | 5060021367228 |

**ALSO NOW AVAILABLE** BDAG1M PROFESSIONAL PU FOAM GUN WITH 1M NOZZLE FOR ROOFING AND WALL PANEL APPLICATIONS.

| CODE   | COLOUR | SIZE      | QTY | BARCODE       |
|--------|--------|-----------|-----|---------------|
| BDAG1M | SILVER | UNIVERSAL | 1   | 5060021371362 |

## ECONOMY SEALANT GUNS



An economy extruder gun for use with cartridge products. All guns have an hexagonal drive bar for improved control and an anti-drip release feature.

Use with all cartridge based silicones, sealants and adhesives.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDCG300 | BLUE   | 300ML | 12  | 5060021363640 |
| BDCG400 | BLUE   | 400ML | 24  | 5060021363657 |
| BDCG900 | BLUE   | 900ML | 12  | 5060021364241 |

# SEALANTGUIDE

| Product                              | Description                                                                                                                                  | Grade               | Use                                                                                                                                                                                                                                                                                                 | Movement Capacity | Life Expectancy | Conforms To                                                | Colours                          | Shell Life |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------|------------------------------------------------------------|----------------------------------|------------|
| AS900 Acoustic Sealant               | Acrylic sealant.                                                                                                                             | Interior            | Sealing and bonding plasterboard and acoustic tiles. Used for walls, ceilings and dry linings.                                                                                                                                                                                                      | L                 | 25 years        | N/A                                                        | White                            | 12 months  |
| Bath-Mate Bathroom & Kitchen Sealant | Water-based filler with fungicide.                                                                                                           | Interior            | Sealing around windows in areas of high humidity i.e. bathrooms and shower rooms. Can also be used to seal around baths and sinks.                                                                                                                                                                  | M                 | 15 years        | EN15651-1:3; F INT, S1                                     | High White                       | 12 months  |
| Build-Mate Building Mastic           | Oil based mastic. Overpaintable with oil based paints.                                                                                       | Exterior            | Bedding, pointing and sealing. Not for use on uPVC.                                                                                                                                                                                                                                                 | L                 | 5 years         | N/A                                                        | White, stone & brown             | 24 months  |
| Gaulk-Mate Decorators Caulk          | Quick drying water-based filler. Overpaintable.                                                                                              | Interior            | Filling gaps and cracks prior to decorating.                                                                                                                                                                                                                                                        | L                 | 10 years        | N/A                                                        | Off White                        | 12 months  |
| Cove-Mate Coving Adhesive            | Solvent-free, gap-filling sealant & adhesive. Overpaintable.                                                                                 | Interior            | Installation of lightweight coving.                                                                                                                                                                                                                                                                 | N/A               | 10 years        | N/A                                                        | White                            | 12 months  |
| Dec-Mate Decorators Filler           | Interior water-based filler. Overpaintable.                                                                                                  | Interior            | Sealing around skirting boards, door and window frames, polystyrene coving and general gap-filling.                                                                                                                                                                                                 | L                 | 10 years        | N/A                                                        | White                            | 12 months  |
| F68 Food Grade Silicone              | High modulus, FDA approved silicone.                                                                                                         | Interior            | Applications within the food machinery and preparation industries.                                                                                                                                                                                                                                  | H                 | 25 years        | FDA No 21 CFR 177.1210 & 177.2600 and NSF/ANSI Standard 51 | White                            | 24 months  |
| Flash-Mate Lead Sealant              | Low modulus silicone. Lead compatible.                                                                                                       | Exterior            | Sealing of lead flashing and sheet to brick, stone and concrete.                                                                                                                                                                                                                                    | H                 | 25 years        | EN15651-1 F INT                                            | Grey                             | 12 months  |
| F54 Fire-Shield AC                   | Fire resistant, intumescent, acoustic acrylic sealant and adhesive. 1 hour fire resistance. Declared rating of 5500A.                        | Interior            | Interior perimeter sealing of fire resistant doors and fire resistant joints. Also bonds dry lining systems and partition walls and ceilings.                                                                                                                                                       | L                 | 20 years        | BS476 Part 20, BSEN 140 Part 3 & BSEN 20140                | White                            | 12 months  |
| Frame-Mate Door & Window Sealant     | Water-based, high performance sealant. Can be overpainted.                                                                                   | Interior / Exterior | Perimeter sealing of window and door frames. Not suitable for uPVC.                                                                                                                                                                                                                                 | M                 | 15 years        | EN15651-1; F EX-HINT                                       | White & brown                    | 12 months  |
| G8 Pro                               | A totally neutral "hybrid" sealant for use in areas requiring a tough elastic rubber joint or as an adhesive with superior bonding strength. | Interior / Exterior | A universal, waterproof construction adhesive and sealer for use with stone, concrete, mirrors (with an acetone resistant backing), natural stone, marble, gypsum board, polycarbonates, polystyrene, PVC, many plastics, ceramics, copper, lead, zinc, aluminium, stainless steel, wood and glass. | H                 | 25 years        | BN15651-1, F INT.                                          | White, black, grey crystal clear | 12 months  |

# SEALANTGUIDE

| Product                             | Description                                                                                                                                  | Grade               | Use                                                                                                                                          | Movement Capacity | Life Expectancy | Conforms To                                                                             | Colours                                                   | Shell Life |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------|------------|
| G8t                                 | Low modulus, neutral cure silicone. Prevents mould growth, can withstand temperatures up to 2200c and can be used on natural stone products. | Interior / Exterior | For sanitary use, window frames, ducting, high temperature applications and porous stone materials such as stone and granite.                | H                 | 25 Years        | BN15651-1:3,4 F EX-HINT, G 25L S1, PM 15651-1:3, G 150046, DIN15651-1:10022 and V36-GAS | White, sandstone, limestone, charcoal, translucent, ivory | 12 months  |
| Glass-Mate Mirror Adhesive          | Neutral curing silicone adhesive.                                                                                                            | Interior            | Bonding mirrors and glazed materials to most common surfaces.                                                                                | H                 | 25 Years        | N/A                                                                                     | Translucent                                               | 12 months  |
| GP200 General Purpose Silicone      | DIV grade, general purpose silicone.                                                                                                         | Interior / Exterior | Multi-purpose, rubber silicone sealant with added fungicide. Suitable for most sealing jobs around the home.                                 | H                 | 20 Years        | EN15651-1:3; F EX-HINT, S1                                                              | White, translucent, brown & black                         | 12 months  |
| H46 RTV Silicone                    | Premium grade, RTV, high modulus, marine grade silicone. Contains no fungicides.                                                             | Interior / Exterior | General glazing and for use with marine joints and gaskets. Excellent heat resistance - up to 2000c.                                         | H                 | 25 years        | EN15651-1:2 F EX-HINT, G 25LM                                                           | White, translucent, grey, brown & black                   | 24 months  |
| HT30                                | High modulus silicone. Heat resistant up to 3000C.                                                                                           | Interior / Exterior | Sealing industrial ovens, heating devices, flues and boilers.                                                                                | H                 | 25 years        | ISO11600-G 25MM                                                                         | Red & Black                                               | 24 months  |
| LAS                                 | Premium grade, low modulus, acetoxy silicone.                                                                                                | Interior / Exterior | General sealing work. Good adhesion to uPVC and plastics. UV and ozone resistant.                                                            | H                 | 25 years        | EN15651-1:2 F EX-HINT, G 25LM                                                           | White, translucent & brown                                | 24 months  |
| Lami-Mate Timber & Laminate Sealant | Polymer based flexible sealant and gap-filler. Can be overpainted, stained or varnished.                                                     | Interior            | Sealing laminate and hardwood flooring and for draught-proofing around timber to provide a dust and air tight seal.                          | M                 | 15 Years        | EN15651-1 F INT                                                                         | Beech, Pine & Oak                                         | 12 months  |
| LN7                                 | Premium grade, low modulus, neutral cure silicone. Gives off no corrosive vapours whilst curing.                                             | Interior / Exterior | Perimeter sealing, high movement building & construction joints and potting compound to encapsulate electronic components.                   | H                 | 25 years        | EN15651-1:2 F EX-HINT, G 25LM                                                           | White, translucent, black & aluminium                     | 12 months  |
| UN11                                | A fire retardant, neutral cure, silicone for the protection of engineered movement joints in buildings.                                      | Interior / Exterior | Maintains the integrity of fire walls when breached by conduits, pipes, etc. and prevents the spread of flame, smoke, toxic gases and water. | H                 | 35 years        | BS476 pt 20.                                                                            | White                                                     | 12 months  |


# SEALANTGUIDE

| Product                           | Description                                                                                              | Grade               | Use                                                                                                                                                         | Movement Capacity | Life Expectancy | Conforms To                    | Colours                                                  | Shelf Life |
|-----------------------------------|----------------------------------------------------------------------------------------------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------|--------------------------------|----------------------------------------------------------|------------|
| Multi-Mate Multi-Purpose Silicone | High modulus, fungicidal silicone.                                                                       | Interior / Exterior | General purpose sealant particularly in areas of high humidity. Ideal for most jobs inside and outside the house.                                           | H                 | 20 years        | EN15651-1,3: F EXT-INT, S1     | White, translucent, brown, grey & black                  | 24 months  |
| Pro-Mate Glazing Silicone         | Low modulus, acetoxy silicone.                                                                           | Interior / Exterior | Sealing of uPVC window & door frames.                                                                                                                       | H                 | 20 years        | EN15651-1,2: F EXT-INT, G 20UM | White, translucent & brown                               | 24 months  |
| PU18                              | One part polyurethane adhesive and sealant. Shore A Hardness of 35.                                      | Exterior            | Sealing and bonding joints in construction engineering and transport industry.                                                                              | H                 | 25 years        | EN15651-1,4: F EXT-INT, PW INT | White, grey & black                                      | 12 months  |
| Rain-Mate All Weather Sealant     | Advanced formula. Adheres to damp surfaces. Paintable.                                                   | Exterior            | General sealing work, particularly where moisture is present.                                                                                               | H                 | 25 years        | N/A                            | White, clear & black                                     | 12 months  |
| Roof-Mate Roof & Gutter Sealant   | Butyl lap jointing sealant.                                                                              | Exterior            | Sealing gaps and cracks in roofs, down pipes and gutters.                                                                                                   | L                 | 10-15 years     | N/A                            | Black                                                    | 24 months  |
| S3 Sanitary Silicone              | High modulus, fungicidal silicone.                                                                       | Interior / Exterior | Bathrooms, kitchens and showers in both commercial and domestic applications.                                                                               | H                 | 25 years        | EN15651-1,3: F INT, S1         | White, clear & ivory                                     | 24 months  |
| Ulti-Mate Builders Silicone       | Low modulus, neutral curing silicone.                                                                    | Interior / Exterior | Perimeter sealing of all windows and doors. Adheres to all surfaces.                                                                                        | H                 | 25 years        | EN15651-1; F EXT-INT           | White, translucent, brown, grey, bronze & black          | 12 months  |
| WG4 Weatherguard                  | Low modulus, acetoxy silicone.                                                                           | Interior / Exterior | Perimeter sealing of uPVC windows and doors. Fast set, non-yellowing and waterproof.                                                                        | H                 | 25 years        | EN15651-1,2: F EXT-INT, G 20UM | White, trans, brown & black                              | 24 months  |
| WP70                              | Low modulus, glazing silicone. Oxime cure                                                                | Exterior            | General sealing & glazing silicone, ideal for sealing uPVC windows. Low meko formulation - safer to use.                                                    | H                 | 20 years        | EN15651-1 F INT                | White, trans, black, grey, buff, brown, toffee, rosewood | 12 months  |
| WP100                             | Low modulus, glazing silicone. Oxime cure                                                                | Exterior            | General sealing & glazing silicone, ideal for sealing uPVC windows. Low meko formulation - safer to use.                                                    | H                 | 25 years        | EN15651-1,2: F EXT-INT, G 25UM | White, trans & black                                     | 12 months  |
| Xtreme                            | Anti-mould, silicone sealant. Guaranteed to prevent mould, mildew & bacterial growth for up to 10 years. | Interior            | For sealing in areas of high humidity such as kitchens, showers, bathrooms, wet rooms, as well as window frames in areas that have high condensation areas. | H                 | 25 years        | EN15651-1,3: F INT, XS1        | White, clear & ivory                                     | 24 months  |

**bond it**

## PREMIERE RANGE

A HIGH PERFORMANCE RANGE OF SEALANTS, PU EXPANDING FOAMS AND ANCILLARY PRODUCTS FOR THE PROFESSIONAL TRADESMAN. COVERING APPLICATIONS SUCH AS GLAZING, HIGH TEMPERATURE, AUTOMOTIVE AND FOOD GRADE INSTALLATIONS.

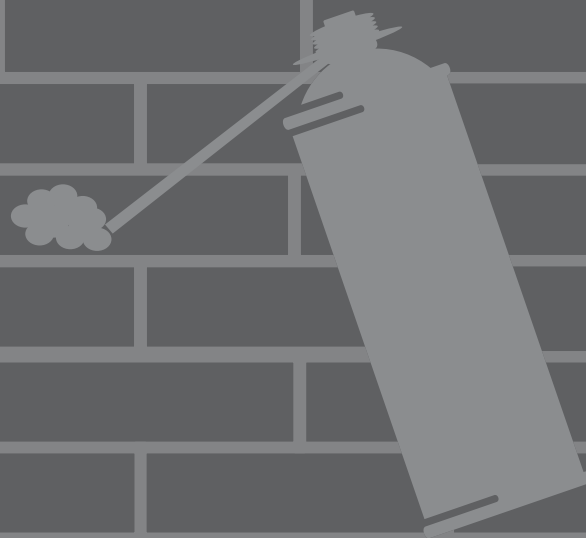



# PREMIERE RANGE

- TOP QUALITY SILICONES & SEALANTS
- HIGH PERFORMANCE POLYURETHANE FOAMS
- PRODUCTS FOR AN ARRAY OF CONSTRUCTION APPLICATIONS
- CE APPROVAL



COLOUR GUIDE & ICON KEY - P. 198-199

## S3 SANITARY SEALANT

A low maintenance, fungal resistant silicone sealant. Contains a biocide to retard unsightly mould growth.  
Conforms to EN15651-1,3; F INT, S1.

**APPLICATION:** Ceramics, glass, melamine laminates and sanitary plastics, anodised aluminium, lacquered metals, painted timber, painted plaster, primed or painted concrete and primed metals. For sealing around worktops, basins, sinks; bedding basins to vanity units and also to seal shower trays and shower units. It has been specially designed to seal in damp and humid areas. **Note:** When sealing metalised trims, test for discolouration prior to application.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDS3IV | IV     | EU3  | 25  | 5060021360472 |
| BDS3T  | T      | EU3  | 25  | 5060021360489 |
| BDS3WH | WH     | EU3  | 25  | 5060021360496 |



## WG4 WEATHERGUARD

A low modulus acetoxo (LMA) silicone sealant that is fast setting, non-yellowing and waterproof. Has good UV and ozone resistance. Suitable for use in domestic, commercial and industrial applications.  
Conforms to EN15651-1,2; F EXT-INT, G 20LM.

**APPLICATION:** For weatherproofing perimeters of inset frames in construction applications, sealing pipe and cable runs and as a lap sealant for preformed panels. Can also be used as a general construction sealant and a general purpose glass and ceramic sealant. It is ideal for use on brick, ceramics, glass, GRP, primed metals and timber and many plastics (adhesion levels should be tested to ensure satisfaction).

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDWG4BL | BL     | EU3  | 25  | 5060021362544 |
| BDWG4T  | T      | EU3  | 25  | 5060021360458 |
| BDWG4WH | WH     | EU3  | 25  | 5060021360465 |





## LA5 LMA SILICONE

An extremely flexible, non-shrinking, low modulus acetoxyl (LMA) silicone sealant which has good adhesion, excellent weathering, UV and ozone resistance.

Conforms to EN15651-1,2; F EXT-INT, G 25LM.

**APPLICATION:** For bonding glass and weather/ draught-proofing door and window frames. Can be used to seal solar collectors, curtain walls, air conditioning and glazing systems, perimeter sealing and cladding systems. It is also ideal for use on ceramics, primed metals and sealed timber and polyester.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDLA5BR | BR     | 310ML | 25  | 5060021360007 |
| BDLA5T  | T      | 310ML | 25  | 5060021360021 |
| BDLA5WH | WH     | 310ML | 25  | 5060021360038 |

## HA6 RTV SILICONE

A premium, non-shrinking, marine quality, silicone sealant and adhesive. It is unaffected by UV, ozone, salt water immersion and extremes of temperature and is non-slumping in paste form. HA6 contains no fungicides or oils which may leach into water.

Conforms to EN15651-1,2; F EXT-INT, G 25LM.

**APPLICATION:** For bonding, bedding and sealing glass in aquarium construction. Suitable for the manufacture of in-situ gaskets and seals for pumps and pipework to prevent water ingress and as a dust and weatherproofing seal for cabinets in dirty environments or external applications. Ideal for use on glass, ceramics, anodised aluminium, primed metals and timber and many plastics.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDHA6BL | BL     | 310ML | 25  | 5060021360045 |
| BDHA6BR | BR     | 310ML | 25  | 5060021363169 |
| BDHA6GR | GR     | 310ML | 25  | 5060021360052 |
| BDHA6T  | T      | 310ML | 25  | 5060021360069 |
| BDHA6WH | WH     | 310ML | 25  | 5060021360076 |



## LN7 LMN SILICONE

100% neutral cure, pure silicone sealant. Gives off no solvents or corrosive vapours whilst setting and cures quicker than most other silicones under all conditions when exposed to air.

Conforms to EN15651-1,2; F EXT-INT, G 25LM.

**APPLICATION:** LN7 can be used in construction, engineering and electrical applications and as a high extensibility sealant for external and internal applications, including expansion joints. Suitable as a rubber adhesive for bonding most materials and as a potting compound to encapsulate electronic components to protect from moisture, tampering and shock. LN7 is effective as a gasketing material and as a bedding compound for glazing double glazed units into timber frames. Contains no components that can degrade insulating glass seals. For use on glass, ceramics, all metals and sealed timber, concrete, mortar, plaster, most plastics, uPVC and polycarbonate and all painted surfaces.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDLN7AL | AL     | 310ML | 12  | 5060021363763 |
| BDLN7BL | BL     | 310ML | 25  | 5060021363176 |
| BDLN7T  | T      | 310ML | 25  | 5060021360090 |
| BDLN7WH | WH     | 310ML | 25  | 5060021360106 |

## FG8 FOOD GRADE SILICONE

A specially formulated, silicone sealant for applications in the food machinery and food preparation industries. Approved by the U.S. Food & Drug Administration (FDA) for food contact. Will also withstand sterilisation cycles and the extremes of heat and cold.

Conforms to FDA No.21 CFR 177.1210 and 177.2600, and NSF/ANSI Standard 51.

**APPLICATION:** Can be used to create waterproof seals and joints in machinery. To seal between ceramic tile and kitchen fittings and seal between walls and floors and also seal around deep freezers, refrigeration units and food processing machinery.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDFG8WH | WH     | 310ML | 25  | 5060021360229 |



# FIRE RATED PRODUCTS

## LN 11 FIRESCREEN SILICONE

A fire retardant, neutral cure, silicone for the protection of engineered movement joints in buildings. LN11 maintains the integrity of fire walls when breached by conduits, pipes, etc. and prevents the spread of flame, smoke, toxic gases and water. Halogen-free to reduce the risks of toxic fumes and corrosion in the event of fire. This product offers up to 4 hours fire and smoke protection. Conforms to BS476 PT 20.

**APPLICATION:** For sealing panels, door frames, partitions and cap beading of protective fire glazing. Suitable for use on concrete, cement, all kinds of metals, timber, glass, ceramics and many plastics. Has all the benefits of a silicone rubber sealant, sealing and waterproofing.

### PRODUCT SPEC:



| CODE     | COLOUR | SIZE  | QTY | BARCODE       |
|----------|--------|-------|-----|---------------|
| BDLN11WH | WH     | 310ML | 12  | 5060021360199 |

## FS4 FIRESHIELD AC INTUMESCENT SEALANT

Intumescent acoustic acrylic sealant and adhesive with a decibel rating of 55 dBA. When subjected to heat the sealant swells (intumesces) to provide an inert barrier to smoke and flames. It has non-slumping and rapid skinning properties.

**Note:** The fire resistance achievable with FS4 FIRESHIELD AC depends upon the joint design, depth of sealant and substrates being sealed.

Conforms to BSEN 140 pt 3; BSEN 20140 & BS476 pt 20.

**APPLICATION:** Specially manufactured to form an acoustic and fire rated, intumescent barrier in construction applications i.e. floor and ceiling joints, dry lining systems, partition walls, etc. It can also be over-painted within 1 hour with fire resistant paint.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDFWH  | WH     | EU3  | 25  | 5060021360212 |
| BDFWH9 | WH     | EU9  | 12  | 5060021363558 |

## HT30 HIGH TEMPERATURE SILICONE

A ready-to-use, acetic curing, silicone sealant. Specifically designed for high temperature use, it is UV resistant and weatherproof. After curing HT30 will resist temperatures of 250°C permanently and up to 300°C for short periods.

**APPLICATION:** For sealing joints which are exposed to high temperatures, i.e. connections on ovens, heating systems, machines, car bodies (vicinity of engines), etc. It can be applied to glass, ceramic tiles, enamel, epoxy paint and polyester. It can also be used with nylon, ABS, metals and polyester in immersion or humid heat, however, a primer may be required.

### PRODUCT SPEC:



| CODE     | COLOUR | SIZE  | QTY | BARCODE       |
|----------|--------|-------|-----|---------------|
| BDHT30R  | R      | 310ML | 12  | 5060021363343 |
| BDHT30BL | BL     | 310ML | 12  | 5060021366535 |

## FIRE RESISTANT EXPANDING PU FOAM

A high performance, polyurethane expanding foam, fire rated and tested to BSEN 1366-4 and BS476 Part 20 (the most stringent test for fire rated products). Seals irregular gaps and expands over 40 times its can volume. This foam can be used at temperatures from +5°C to +25°C. The cured foam is semi-rigid and predominantly close-celled. It is resistant to temperatures ranging from -40°C to +100°C and to ageing, but not to UV-rays. Noise and heat insulation values are excellent. Available in gun grade or straw aerosol version.

**APPLICATION:** Window setting (where a clean and controlled backfill is required), entrance door linings, any kind of small break-throughs in walls and other cavities. This foam exceeds the requirements of Construction Materials Class B1 rating in accordance with DIN 4102 Pt 1.

Use with BDAG1 or BDAK45 Foam Applicators - Page 39

### PRODUCT SPEC:



| CODE      | COLOUR | SIZE  | QTY | BARCODE       |
|-----------|--------|-------|-----|---------------|
| BDEFR750  | P      | 750ML | 12  | 5060021360236 |
| BDEFRG750 | P      | 750ML | 12  | 5060021363756 |



# WP70 OXIME SILICONE

## LOW MODULUS

A low modulus neutral cure (LMN) silicone for perimeter sealing of external door and window frames. Rapid curing with good adhesion properties and additional uPVC adhesion promoters and extended open time for ease of tooling.

Conforms EN15651-1; F INT.

### APPLICATION:

For perimeter sealing of external wood, aluminium and uPVC door and window frames and for weather sealing and flexible jointing of infill panels. Can also be used on concrete, plaster and mortar.

**Note:** Not suitable for use with aquaria or for use on bitumen or asphalt. This product cannot be over-painted. Risk of yellowing in low UV light situations (e.g. if used indoors) whilst curing.

### PRODUCT SPEC:



### NOTE:

For external use only



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| WP70ANT | ANT    | EU3  | 25  | 5060021369819 |
| WP70BL  | BL     | EU3  | 25  | 5060021368980 |
| WP70BR  | BR     | EU3  | 25  | 5060021364586 |
| WP70BU  | BU     | EU3  | 25  | 5060021368805 |
| WP70GR  | GR     | EU3  | 25  | 5060021369116 |
| WP70RW  | RW     | EU3  | 25  | 5060021368607 |
| WP70T   | T      | EU3  | 25  | 5060021366177 |
| WP70TF  | TF     | EU3  | 25  | 5060021369109 |
| WP70WH  | WH     | EU3  | 25  | 5060021364562 |
| WP70WH4 | WH     | EU4  | 25  | 5060021366313 |

# WP100 OXIME SILICONE

## HIGH GRADE

A high grade LMN silicone for perimeter sealing of external door and window frames. Rapid curing with good adhesion properties and additional uPVC adhesion promoters and extended open time for ease of tooling.

Conforms EN15651-1; F EXT-INT, G 25LM.

### APPLICATION:

For perimeter sealing of external wood, aluminium and uPVC door and window frames and for weather sealing and flexible jointing of infill panels. Can also be used on concrete, plaster and mortar.

**Note:** Not suitable for use with aquaria or for use on bitumen or asphalt. This product cannot be over-painted. Risk of yellowing in low UV light situations (e.g. if used indoors) whilst curing.

### PRODUCT SPEC:



### NOTE:

For external use only



| CODE     | COLOUR | SIZE | QTY | BARCODE       |
|----------|--------|------|-----|---------------|
| WP100BL  | BL     | EU3  | 25  | 5060021369697 |
| WP100T   | T      | EU3  | 25  | 5060021368515 |
| WP100WH  | WH     | EU3  | 25  | 5060021368508 |
| WP100WH4 | WH     | EU4  | 25  | 5060021369413 |

**DID YOU KNOW...** FIRE RATED POLYURETHANE FOAMS MUST CARRY THE B1 CLASSIFICATION FOR EFFECTIVE SEALING AGAINST SPREAD OF FLAMES.



## AS900 ACOUSTIC SEALANT

A flexible joint filler, acoustic sealant and adhesive for plasterboard partitioning systems. A high quality acrylic sealant and adhesive with good adhesion to most common building materials.

**APPLICATION:** Suitable for interior sealing around drywall partitioning to reduce noise transmission and for cracks and joints with low movement. It can also be used for sealing interior skirting boards and fixing plasterboard into partition systems to reduce vibration and movement.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDAS900 | WH     | 900ML | 12  | 5060021360205 |

**DID YOU KNOW... SEE OUR MEGASTIK PU ADHESIVE FOR THE QUICK & EASY INSTALLATION OF PLASTERBOARD, INSULATION BOARDS & FLOORBOARDS. (PAGE 62)**

## XTREME ALWAYS

A superior anti-mould silicone sealant, guaranteed to prevent mould, mildew and bacterial growth for up to 10 YEARS! Remains permanently waterproof making it suitable for sealing applications in areas of high humidity such as kitchens, shower bases and cubicles, baths, wet rooms, sanitary ware, etc. Can also be used around window and door frames in areas that have high condensation levels. Conforms to EN15651-1,3; F INT, XS1.

**APPLICATION:** Stays mould-free for 10 years & protects against discolouration. Contains powerful anti-fungal biocide that retards mould growth. Refillable handy display box available.

### PRODUCT SPEC:



| CODE     | COLOUR | SIZE  | QTY | BARCODE       |
|----------|--------|-------|-----|---------------|
| BDSANXCL | CL     | 310ML | 12  | 5060021367365 |
| BDSANXIV | IV     | 310ML | 12  | 5060021367358 |
| BDSANXWH | WH     | 310ML | 12  | 5060021367334 |

**GUARANTEED TO STOP BLACK MOULD GROWTH FOR UP TO 10 YEARS**

# GIST

## THE ONLY SILICONE YOU MAY EVER NEED...

A low modulus neutral cure (LMN) silicone sealant designed to replace all other silicones. It will not react with natural stone or bleed into porous stone and also contains a powerful fungicide to prevent mould growth.

### APPLICATION:

For most sealing applications including sanitary use, window frames, ducting, high temperature (up to 220°C) and natural stone. Suitable for use on metals, mirrors, natural stone, granite, travertine, marble, stone, uPVC, concrete, plaster and VSG/LSG glass (laminated safety glass).

Conforms to EN15651-1,2,3,4 F EXT-INT, G 25LM, XS1, PW Ext-Int CC, Tested in accordance to ISO846, DIN18545, VDI 6022 and VSG-GLAS.

### PRODUCT SPEC:



| CODE     | COLOUR | SIZE  | QTY | BARCODE       |
|----------|--------|-------|-----|---------------|
| BDGISTCH | CH     | 310ML | 12  | 5060021367389 |
| BDGISTIV | IV     | 310ML | 12  | 5060021367396 |
| BDGISTLS | LS     | 310ML | 12  | 5060021367402 |
| BDGISTSS | SS     | 310ML | 12  | 5060021367372 |
| BDGISTT  | T      | 310ML | 12  | 5060021369123 |
| BDGISTWH | WH     | 310ML | 12  | 5060021368799 |

**COLOUR MATCH TO BOND IT STERI-GROUT: HYGIENIC CERAMIC FLOOR AND WALL TILE GROUT P.71**



# RELOAD

## THE RE-USABLE SILICONE CARTRIDGE



This LMN sealant is encased in a foil sausage which simply inserts into the plastic (re-usable) cartridge, snip the end with scissors, fit the nozzle and cut as with standard cartridges. Once the sealant is used, simply remove the spent slug and dispose of. Select your next sausage, reload and repeat the process thereby cutting down on time, waste and costs.

- LESS WASTE
- LOWER COSTS
- ENVIRONMENTALLY FRIENDLY
- STANDARD SEALANT GUN APPLICATOR
- WILL NOT JAM IN USE
- SLEEVE CAN BE RE-USED
- MAJOR COST SAVINGS ON WASTE DISPOSAL.

### PRODUCT SPEC:

SILICONE: WP70  
KIT - 20 SAUSAGES; 3 NOZZLES + 2 RE-USABLE SLEEVES.  
REFILL: 24 SAUSAGES  
PRODUCT CODE: RLS / RLK  
COLOURS: WH T RW



## PU18 POLYURETHANE ADHESIVE & SEALANT

A one-part, moisture curing, polyurethane adhesive and sealant, with a shore A hardness of 40, for the construction and transport industries. Produces tough, elastic seals and joints with excellent adhesion characteristics which helps dampen vibration. Also oil resistant making it ideal for the engineering industry.

Conforms to EN15651-1,4; F EXT-INT, PW INT

**APPLICATION:** Can be used for sealing and bonding in engineering, construction, automotive and marine applications. It is ideal for use on concrete, wood, metals, GRP, rubbers and most common building materials. It is also suitable for fixing wooden floors.

### PRODUCT SPEC:



| CODE     | COLOUR | SIZE  | QTY | BARCODE       |
|----------|--------|-------|-----|---------------|
| BDPU18BL | BL     | 310ML | 12  | 5060021362407 |
| BDPU18GR | GR     | 310ML | 12  | 5060021362414 |
| BDPU18WH | WH     | 310ML | 12  | 5060021362162 |

## EXPANDING FOAM GUN CLEANER

A dual purpose, solvent-based solution for effective cleaning of expanding foam applicator guns and removal of wet/ uncured foam. Regular cleaning is essential in order to prolong the service life of the applicator and optimise foam delivery.

ATTACHES TO STANDARD FOAM APPLICATOR GUNS (BDAG1 & BDAK45).

### PRODUCT SPEC:



| CODE  | COLOUR | SIZE  | QTY | BARCODE       |
|-------|--------|-------|-----|---------------|
| BDCF1 | CL     | 500ML | 12  | 5060021361073 |

USE WITH BDAG1 OR BDAK45 FOAM APPLICATORS





# MEGA FOAM

## HAND AND GUN GRADE IN 1 CAN

A high performance, polyurethane expanding foam available for use as an aerosol grade using the patented adaptor or by simply fixing a gun applicator can be used as gun grade. Quick, economic and easy to apply for fitting doors, windows and insulating pipes and filling gaps. Improves draught and heat insulation and deadens noise. Fitted with new, unique valve which allows for multi-directional use.

### EXCEEDS DIN4102 CLASS: B3

(Foam rating for products with no fire resistant additives or properties).

- CAN BE USED AT ANY ANGLE THROUGH 360°
- HIGH YIELD UP TO 30% MORE VOLUME THAN STANDARD FOAM
- LONGER SHELF LIFE THAN A STANDARD CAN
- PROBLEM FREE VALVE
- FILLS HOLES

### APPLICATION:

Window setting (where a clean and controlled backfill is required), entrance door linings, any kind of small breakthroughs in walls and other cavities

Use with BDAG1 or BDAK45 Foam Applicators - Page 39.

### PRODUCT SPEC:

| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDEF500 | BG     | 500ML | 12  | 5060021360731 |
| BDEF750 | BG     | 750ML | 12  | 5060021360748 |



## PROFESSIONAL GUN FOAM APPLICATOR



- HEAVY DUTY FOR PROFESSIONAL USE
- STEEL BALL VALVE
- VARIABLE EXTRUSION RATE
- TUV SAFETY CLASSIFICATION

A top quality metal gun for use with gun grade polyurethane expanding foams. Screws onto the canister for quick and easy application.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE      | QTY | BARCODE       |
|--------|--------|-----------|-----|---------------|
| BDAG1  | SILVER | UNIVERSAL | 1   | 5060021362100 |
| BDAG1M | SILVER | UNIVERSAL | 1   | 5060021371362 |

## HEAVY DUTY GUN FOAM APPLICATOR



- PTFE BALL VALVE
- VARIABLE EXTRUSION RATE
- CE SAFETY CLASSIFICATION

A professional gun for delivering polyurethane foam. Made entirely of metal, it is robust and easy to handle with its ergonomic handgrip made of anti-solvent nylon. Body, adaptor, non-returnable valve and nozzle are teflon coated to prevent foam from sticking to the gun and facilitate cleaning. Exceptionally hard wearing gun parts - this is a gun for life!!

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE      | QTY | BARCODE       |
|--------|--------|-----------|-----|---------------|
| BDAK45 | BLACK  | UNIVERSAL | 1   | 5060021367228 |

**DID YOU KNOW...** FOAM GUNS SHOULD BE THOROUGHLY CLEANED WITH BOND IT PU SOLVENT CLEANER AFTER USE TO ENSURE A LONG LIFE.

## ANCHOR BOND GUN

A high quality gun for using with Anchor Bond coaxial cartridges (380ml). (See page 57).

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDAB63 | BLUE   | 380ML | 1   | 5060021363992 |

## PRO PLUS HEAVY DUTY EXTRUDER

A heavy duty, high quality 10.5" (400ml) metal extruder for use with cartridge products. Robust construction with rotating barrel. Anti-drip release feature.

### PRODUCT SPEC:



| CODE  | COLOUR | SIZE  | QTY | BARCODE       |
|-------|--------|-------|-----|---------------|
| BDHD6 | BLUE   | 400ML | 12  | 5060021363596 |

## PROFESSIONAL APPLICATOR GUN

A high quality, PC Cox extruder gun for use with cartridge based products. Features zinc coated, corrosion resistant, hexagonal drive bar for improved control.

- Anti-drip release feature.
- Manufactured in UK.
- Epoxy coated frame.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE |
|---------|--------|-------|-----|---------|
| BDBC400 | BLUE   | 400ML | 25  | N/A     |

## ECONOMY SEALANT GUN


An economy extruder gun for use with cartridge products. All guns have hexagonal drive bars for improved control. Anti-drip release feature.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDC6300 | BLUE   | 300ML | 24  | 5060021363640 |
| BDC6400 | BLUE   | 400ML | 24  | 5060021363657 |
| BDC6900 | BLUE   | 900ML | 12  | 5060021364241 |

## SAUSAGE GUN

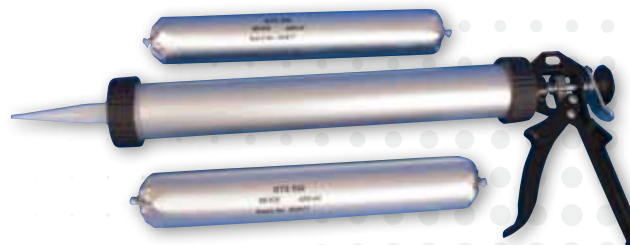

Foil pack applicator designed for use with foil packs/ sausages. The enclosed aluminium barrel can also be used for standard cartridges. Will accept 600ml - 15 inch foil sausages. Supplied with 1 nozzle.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BD600SG | SILVER | 600ML | 1   | 5060021366658 |

**DID YOU KNOW...** MOVEMENT ACCOMMODATION REFERS TO THE PERCENTAGE THE SILICONE WILL EXPAND AND CONTRACT BACK TO ITS ORIGINAL FORM. THE RATE VARIES DEPENDANT UPON THE FORMULATION AND TYPE BUT IT IS A KEY FACTOR WHEN CHOOSING THE RIGHT PRODUCT FOR THE RIGHT JOB.

BE AWARE THAT A SILICONE FOR SEALING AROUND A PVCU WINDOW FRAME SHOULD HAVE GREATER MOVEMENT CAPACITY THAN ONE USED FOR SEALING AROUND A KITCHEN WORKTOP FOR EXAMPLE.

**bond it**

**RELOAD**

*Low waste, eco friendly system*

**& RECYCLE**

**THE RE-USABLE  
SILICONE CARTRIDGE**



**YOUR ANSWER TO  
THE LANDFILL PROBLEM**



**BEING GREEN AND SAVING MONEY!**

**bond it**

**DECORATORS RANGE**

**A RANGE OF DIY PRODUCTS AND SUNDRIES FOR  
DECORATING JOBS AROUND THE HOUSE.**





# DECORATORS RANGE

- HANDY DIY SIZED PACKS
- QUICK DRYING PRODUCTS
- OVER PAINTABLE
- FOR DECORATING JOBS AROUND THE HOUSE

COLOUR GUIDE & ICON KEY - P. 198-199

NEVER COMPROMISE ON **QUALITY!**



## STAIN BLOCK

A xylene and lead-free, high performance, fast drying, pigmented solvent based permanent stain blocking coating.

**APPLICATION:** For use prior to redecoration on spot marking, water/grease marks and stubborn stains. Suitable for interior use on most building surfaces including brick, plaster, paint and wood. When correctly applied it produces a fast drying, stain block coating ready for redecoration. Touch dry after 15 minutes. Ready for redecorating in approx 2 hours.

### PRODUCT SPEC:



**Coverage:** approx. 0.75m<sup>2</sup>/400ml



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDSB400 | ○ O/WH | 400ML | 12  | 5060021369680 |

## ONE HIT WONDER LIGHTWEIGHT FILLER



Ready mixed compound that fills holes and gaps in a single application. Gives a super smooth, brilliant white finish that does not require sanding.

**APPLICATION:** Internal and external use. Non slumping and shrink resistant, ideal for uneven surfaces or difficult, awkward areas to fill e.g. ceilings. Use on plaster, concrete, brick, wood or stone. Note: Do not use in areas subject to frequent water immersion.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDLWF05 | ○ WH   | 500ML | 12  | 5060021364791 |
| BDLWF1  | ○ WH   | 1L    | 6   | 5060021364807 |
| BDLWF4  | ○ WH   | 4L    | 1   | 5060021364814 |

# READY MIXED

## MULTI-PURPOSE FILLER

An all purpose, ready mixed filler for repairs inside and out. Gives a crack resistant, smooth, finish that can be sanded, over-painted, papered or stained once dried.

### APPLICATION:

Fills gaps and holes in plaster, brick, plasterboard, render, stone and wood and most other building materials.

### BENEFITS:

- Waterbased.
- Crack resistant.
- Excellent grip properties.
- Overpaintable.
- Extra smooth finish.

### PRODUCT SPEC:



| CODE     | COLOUR | SIZE | QTY | BARCODE       |
|----------|--------|------|-----|---------------|
| BDRMF750 | WH     | 750G | 12  | 5060021369550 |



# DUST SHEETS



**IDEAL FOR COVERING ALL FURNITURE AND FITTINGS WHILE DECORATING, CLEANING AND STORING.**

## HEAVY DUTY COTTON TWILL DUST SHEETS



- Genuine cotton twill.
- Protects from spills & splashes.
- Hard wearing cotton, resists wear from tools, step ladders and foot traffic.
- Reusable, cost saving & value for money.
- Can be washed.

| CODE     | COLOUR | SIZE       | QTY | BARCODE |
|----------|--------|------------|-----|---------|
| BDCDS129 | C      | 12FT X 9FT | 1   | N/A     |

## ALL PURPOSE POLYTHENE DUST SHEETS



- Protects from spills & splashes.
- Waterproof.
- Rotproof.
- Medium weight.

| CODE     | COLOUR | SIZE       | QTY | BARCODE |
|----------|--------|------------|-----|---------|
| BDPDS129 | CL     | 12FT X 9FT | 1   | N/A     |

# COVER-IT

## FLOOR PROTECTORS


High performance, self-adhesive protection materials for covering and protecting hard floors and hard surfaces, and carpets and textiles. Protects against mess, dirt, spillages and staining, etc, whilst painting and decorating, plastering, tiling and general building and maintenance projects.

Easy to apply simply roll onto the floor or surface and adhere it firmly to the material to be covered.

To remove:- the low tackadhesive will allow for easy removal. Lift each edge in turn and pull back ensuring any spills are covered and cannot escape before lifting the whole sheet.

### BENEFITS:

- Protects against costly damage to most surfaces.
- Easy application, simply unwind and cover-it.
- Waterproof - good against paint and liquid spillages.
- Safer to use than loose dust sheets and covers as it adheres to the surface.
- Quick removal.
- Heavy duty.
- Can be left down for up to 4 weeks.
- In areas of heavy traffic, eg. doorways, repeat application may be required. Cover-It can be applied over itself provided the surface is free from dust, moisture and grease.

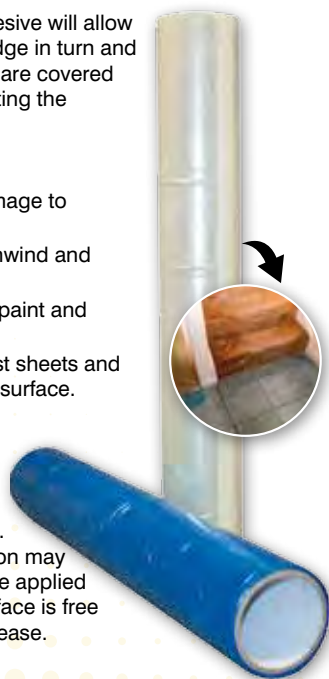

### COVER-IT FOR TEXTILES

| CODE      | COLOUR | SIZE         | BARCODE       |
|-----------|--------|--------------|---------------|
| BDCICP25  | CL     | 600MM X 25M  | 5060021369499 |
| BDCICP50  | CL     | 625MM X 50M  | 5060021369857 |
| BDCICP100 | CL     | 625MM X 100M | 5060021369864 |

### COVER-IT FOR RESILIENT SURFACES

| CODE      | COLOUR | SIZE         | BARCODE       |
|-----------|--------|--------------|---------------|
| BDCIHP25  | B      | 600MM X 25M  | 5060021369703 |
| BDCIHP50  | B      | 625MM X 50M  | 5060021369833 |
| BDCIHP100 | B      | 625MM X 100M | 5060021369840 |

## LAMI-MATE TIMBER & LAMINATE SEALANT

A polymer enhanced, flexible sealant and gap-filler designed for sealing all tongue and groove laminate and hardwood flooring. Remains permanently flexible and can be over-painted, stained or varnished for colour matching purposes, once cured.

Conforms to EN15651-1; F INT.

**APPLICATION:** Can be used for draught-proofing around timber flooring to provide an effective dust and air tight seal. It can also be used for sealing around all types of fitted furniture i.e. bedroom and kitchen fittings, laminate worktops, etc. Also suitable for sealing glass panels into kitchen unit doors.

### PRODUCT SPEC:

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDLSBC | BC     | EU3  | 12  | 5060021362650 |
| BDLSOK | OK     | EU3  | 12  | 5060021362667 |
| BDLSPN | PN     | EU3  | 12  | 5060021362643 |

**USE CLEAN-IT LAMINATE & WOOD CLEANER TO BRIGHTEN UP CUPBOARDS, WORKTOPS ETC. NON ABRASIVE ORGANIC CLEANING SPRAY FOR ALL TREATED LAMINATE AND SOLID WOOD SURFACES. SEE PAGE 105.**

## COVE-MATE COVING ADHESIVE

A high strength, solvent-free, gap-filling, coving and decorating adhesive. Quick grab and suitable for interior coving and decorative mouldings. Can replace mechanical fixings in a multitude of home improvement applications. Dries to a white finish and can be over-painted once dry.

**APPLICATION:** Ideal for fixing polystyrene and PU covings, skirting boards, architraves and dado rails, etc. It can be used internally on plaster, brick and stone. It is also suitable for bonding work tops to base units and for bonding cork tiles and cork sheet. **Note:** Not suitable for polythene, polypropylene, teflon, nylon or plaster coving.

### PRODUCT SPEC:

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDCMWH | WH     | EU3  | 12  | 5060021364678 |







## CAULK-MATE DECORATORS CAULK

A rapid drying, interior decorators caulk. Remains permanently flexible and can be smoothed and over-painted within 1-2 hours of application. Has good adhesion to most building materials.

**APPLICATION:** Suitable for sealing and filling cracks in most "alike" materials, such as skirting boards, plastics and polystyrene coving. Note: Not recommended for external use, for UPVC or in wet areas.

### PRODUCT SPEC:



| CODE     | COLOUR | SIZE | QTY | BARCODE       |
|----------|--------|------|-----|---------------|
| BDOHC300 | WH     | EU3  | 25  | 5060021364951 |
| BDOHC400 | WH     | EU4  | 25  | 5060021364968 |

**DID YOU KNOW... OUR WATERBASED SEALANTS CAN BE STAINED, SMOOTHED AND OVER PAINTED FOR COLOUR MATCHING PURPOSES.**



## DEC-MATE FLEXIBLE FILLER

A quick drying interior decorators filler that can be smoothed and over-painted within 1-2 hours of application. Adheres to most surfaces and being flexible will allow low movement in joints between different materials or substrates.

**APPLICATION:** For gaps and cracks in skirting boards, ceilings, stair risings, fitted furniture and light fittings. Also for filling interior cracks and damage in plaster, brick, concrete and plasterboard. Can be over-painted with emulsion paint as soon as a skin forms, after approximately 1 hour. For oil based paints allow to dry completely for 24-48 hours before over painting. **Note:** Not recommended for external use, for uPVC or in wet areas.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDDM    | WH     | EU3  | 25  | 5060021361523 |
| BDDF400 | WH     | EU4  | 25  | 5060021360540 |



## SAVES NAILS SOLVENT-FREE

Offering less impact on the environment, this solvent-free formula offers instant grab and a tough permanent bond on virtually any porous or non-porous surface. A low odour, water clean-up construction adhesive which cures to form a high strength bond. Extremely low VOC content.

Contains no harmful raw materials, making it safer for the environment, safe for the user and safe on substrates.

**Note:** Recommended for internal use only.

**APPLICATION:** Ideal for fixing panelling, plasterboard, cove base, window sills, styrofoam, carpet tack strips, aluminium firing strips, tub surrounds, fireplaces, loose floor/wall tiles, plywood, aluminium, steel, wood, concrete, cork, general repairs to wood, fixing hardboard and plywood and as a general adhesive.

### PRODUCT SPEC:



| CODE  | COLOUR | SIZE | QTY | BARCODE       |
|-------|--------|------|-----|---------------|
| BDPGE | WH     | EU3  | 25  | 5060021360564 |



## GRIPBOND WHITE SOLVENT-FREE

A premium environmentally friendly, multi-purpose, gap-filling adhesive. Water based, totally solvent-free with quick grab properties. Cures to give a tough, durable and permanent bond. Can be used to replace or augment mechanical fixings when bonding brick, building panels, carpets, chipboards, concrete, coving, floor panels, foam insulation, marble, metals, tiles and timber. It is also suitable for bonding polystyrene.

**APPLICATION:** Ideal for fixing batons, cladding, countertops, drywall partitioning, mouldings, and dado rails, mirror tiles, trims and wall boards. Also an excellent adhesive for bonding stair nosings, gripper rods and general construction work.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDGBSF | WH     | 350ML | 12  | 5060021371256 |

# SAVES NAILS TAPE

## EXTRA STRONG DOUBLE SIDED ADHESIVE TAPE

Extra strong double sided, water-resistant adhesive tape for interior and exterior use. Ideal for mounting on ceramic tiles, painted surfaces, glass, metal and plastics. Good for bonding badges, name tags, protective mouldings, interior mirrors and other light weight items. Excellent adhesion to metals, glass, painted surfaces and many plastics. Not recommended for use on vinyl wallpaper, stone, wood or dusty surfaces.

### APPLICATION:

Simply cut to the required length and apply using firm pressure to the item to be stuck. Load Capacity: 40Kg per m of tape.

### PRODUCT SPEC:



SIZE: 19MM X 1.5M



| CODE   | COLOUR | SIZE        | QTY | BARCODE       |
|--------|--------|-------------|-----|---------------|
| BDSN2T | CL     | 19MM X 1.5M | 1   | 5060021369918 |

**DID YOU KNOW...** SAVES NAILS TAPE IS IDEAL FOR USE ABOUT THE HOUSE, IN THE OFFICE OR FOR LIGHT CONSTRUCTION APPLICATIONS. CAN ELIMINATE THE NEED FOR DRILLING, PLUGGING AND UNSIGHTLY SCREW HEADS.

**bond it**

## ADHESIVES RANGE

A COMPREHENSIVE RANGE OF HIGH PERFORMANCE SOLVENT AND WATERBASED ADHESIVES FOR DOMESTIC, COMMERCIAL AND INDUSTRIAL APPLICATIONS.

# ADHESIVES RANGE

- HIGH PERFORMANCE ADHESIVES
- SOLVENT-BASED AND SOLVENT-FREE ALTERNATIVES
- FOR DOMESTIC, COMMERCIAL & INDUSTRIAL APPLICATIONS



COLOUR GUIDE & ICON KEY - P. 198-199

TOLUENE  
FREE




## GRIPBOND

A multi-purpose, solvent-based construction adhesive that can replace mechanical fixings in a wide variety of applications. A fast bonding, non-slumping, instant grab adhesive with good gap-filling properties even on uneven surfaces. Can be used in all weather conditions and is suitable for rough and porous surfaces. It can also be over-painted once dry.

**APPLICATION:** Ideal for fixing a wide variety of materials. It can be used to fix skirting boards, door surrounds and frames, window sills, all types of cladding, wall battens, decorative wall boards, metal carpet edges, automotive trims and much more. It can be used for interior and exterior applications. **Note:** Toluene-Free formulation! Bridges gaps upto 12mm.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDGB    | BG     | 350ML | 24  | 5060021360557 |
| BDGB12  | BG     | 350ML | 12  | 5060021360557 |
| BDGB3 * | BG     | 310ML | 25  | 5060021368683 |

\* TO SPECIAL ORDER ONLY

## GRIPBOND WHITE SOLVENT-FREE

A premium environmentally friendly, multi-purpose, gap-filling adhesive. Water based, totally solvent-free with quick grab properties. Cures to give a tough, durable and permanent bond. Can be used to replace or augment mechanical fixings when bonding brick, building panels, carpets, chipboards, concrete, coving, floor panels, foam insulation, marble, metals, tiles and timber. It is also suitable for bonding polystyrene.

**APPLICATION:** Ideal for fixing batons, cladding, polystyrene, countertops, drywall partitioning, mouldings, dado rails, mirror tiles, trims and wall boards. Also an excellent adhesive for bonding stair nosings, gripper rods and general construction work.

### PRODUCT SPEC:




| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDGBSF | WH     | 350ML | 12  | 5060021371256 |





**TOLUENE  
FREE**



## SAVES NAILS

An instant grab, non-slumping, multi-purpose building adhesive with gap-filling properties that will bridge gaps up to 12mm.

**APPLICATION:** Suitable for interior and exterior use on most common building materials including brick, ceramics, glass, metals, plaster, plastics, wood and stone. Replaces mechanical fixing in a variety of DIY applications.

**Note:** Toluene Free Formulation!

### PRODUCT SPEC:



| CODE  | COLOUR | SIZE | QTY | BARCODE       |
|-------|--------|------|-----|---------------|
| BDSN2 | BG     | EU3  | 25  | 5060021366597 |



### NEW POLYAMIDE CARTRIDGE

## SAVES NAILS SOLVENT-FREE

Offering less impact on the environment, this solvent-free formula offers instant grab and a tough permanent bond on virtually any porous or non-porous surface. A low odour, water clean-up construction adhesive which cures to form a high strength bond. Extremely low VOC content. Contains no harmful raw materials, making it safer for the environment, safe for the user and safe on substrates.

**Note:** Recommended for internal use only.

**APPLICATION:** Ideal for fixing panelling, plasterboard, cove base, window sills, styrofoam, carpet tack strips, aluminium furring strips, tub surrounds, fireplaces, loose floor/wall tiles, plywood, aluminium, steel, wood, concrete, cork, general repairs to wood, fixing hardboard and plywood and as a general adhesive.

### PRODUCT SPEC:



| CODE  | COLOUR | SIZE | QTY | BARCODE       |
|-------|--------|------|-----|---------------|
| BDPGE | WH     | EU3  | 25  | 5060021360564 |

# ANCHOR BOND

## RAPID CURING ANCHORING SYSTEM

A polyester resin, single pack, rapid curing, chemical anchoring system. A 2-part system applied in one single action to produce a cost-effective, tough chemical resistant fixing. Ideal day to day applications include: railings, steel structures, satellite dishes, fire surrounds, gates, sanitary fixings/ towel holders, pipes and lamps. Use of Anchor Bond makes the fixing an integral part of the substrate as the load is spread throughout the entire fixing area as opposed to when plastic plugs or mechanical fixings are used especially in friable or cracked substrates.

### APPLICATION:

Suitable for setting bolts, studs, wall ties, starter bars or large screws, etc. into a wide range of substrates. Compatible with brickwork, concrete, masonry, stone and aerated concrete blocks. Ideal for close-to-edge applications (unlike expansion anchors) as no stress is placed on the surrounding substrate. Full cure is obtained after 2 hours.

**SPECIALIST EXTRUDER AVAILABLE FOR 380ML CARTRIDGE SEE PAGE 40.**

**NOTE: SPARE NOZZLES ARE AVAILABLE (SOLD IN BAGS OF 10). N.B. 310ML NOW FITS STANDARD SEALANT APPLICATOR GUN (BDCG300).**



### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDAB380 | GR     | 380ML | 12  | 5060021363541 |
| BDAB310 | GR     | 310ML | 10  | 5060021368669 |

## CONTACT ADHESIVE

A premium grade, solvent-based, neoprene adhesive with high grab and long open time to enable repositioning. 250ml, 500ml and 1L versions are toluene-free.

**APPLICATION:** Can be used for bonding cork, leather, rubber, metals, wood, chipboard hardboard, laminated plastics (e.g. Formica), dense textiles, plaster, stone concrete and smoothing compounds. It will bond rigid PVC and PVCu sheets but the materials should be checked for suitability prior to application as plasticiser migration can occur in some instances.

**Note:** This product is not suitable for polystyrene, polythene, polypropylene, silicone rubbers, bitumen or PTFE and may attack certain painted or lacquered surfaces.



### PRODUCT SPEC:

NOW OFFERED IN 250ML VERSION WITH APPLICATION BRUSH & 5L ROUND METAL TIN (FOR TRADE USE ONLY).



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDA004  | BG     | 250ML | 12  | 5060021369352 |
| BDA001  | BG     | 500ML | 12  | 5060021360588 |
| BDA002  | BG     | 1L    | 12  | 5060021360595 |
| BDA003L | BG     | 5L    | 1   | 5060021368201 |

## DUO "2 IN 1" WOOD GLUE

Fast drying, water-resistant, PVA adhesive with a bond strength stronger than the wood itself.

Conforms to the requirements of category D3/3 and D3/4 of EN204. Meets the resistance to sustained load (creep test) requirements of BS 407 "Polyvinyl Acetate (PVA) Emulsion Adhesives for Wood".

**APPLICATION:** Rapid bond strength development. Suitable for hard and soft woods, decorative laminates, chipboard, blockwood and other engineered timber panels. Can be used in applications where joints may be subjected to short term water contact or exposure to high humidity i.e. kitchen work surfaces, window frames, doors and stairs. Suitable for interior and exterior applications.



### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDA050 | WH     | 125ML | 24  | 5060021364371 |
| BDA051 | WH     | 250ML | 12  | 5060021364388 |
| BDA052 | WH     | 500ML | 20  | 5060021364395 |
| BDA053 | WH     | 1L    | 12  | 5060021364401 |
| BDA054 | WH     | 2.5L  | 4   | 5060021364418 |
| BDA055 | WH     | 5L    | 4   | 5060021364425 |
| BDA056 | WH     | 25L   | 1   | 5060021364432 |
| BDA057 | WH     | 200L  | 1   | 5060021364685 |

## CONTRACTORS GRADE PVA

An all purpose, contractors grade primer, sealer and bonding agent that dries quickly to give a high bond strength.

**APPLICATION:** Can be used with plaster, cement, timber, gypsum wall boards and paper. Properties as an adhesive include fast drying. It is also a readily dilutable primer for sealing applications or addition to cement and plaster to improve adhesion and cure. High solids content compared with other contractor grades.



### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDAC05  | WH     | 500ML | 20  | 5060021369260 |
| BDAC1   | WH     | 1L    | 12  | 5060021366146 |
| BDAC2   | WH     | 2.5L  | 4   | 5060021368690 |
| BDAC5   | WH     | 5L    | 4   | 5060021364890 |
| BDAC25  | WH     | 25L   | 1   | 5060021364906 |
| BDAC200 | WH     | 200L  | 1   | 5060021364913 |

## PVA ADHESIVE & SEALER

A high solids, high performance sealer, primer, dust-proofer and bonding agent. Improves adhesion and reduces cracking in cements and plaster. Primes and seals porous surfaces. Quick drying, durable and has a very high bond strength. Better water resistance, adhesion and flexibility. Excellent drying at low temperatures. Phthalate free formulation (safer to use). Can be readily diluted without compromising quality.

Conforms to BS5270.

**APPLICATION:** Plaster primer, porous surface primer and sealer • Rendering key coat for internal applications • Admixture • Dust sealer • General purpose adhesive for bonding all common construction materials.



### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDA021 | WH     | 500ML | 20  | 5060021361653 |
| BDA022 | WH     | 1L    | 12  | 5060021361660 |
| BDA023 | WH     | 5L    | 4   | 5060021360663 |
| BDA024 | WH     | 2.5L  | 4   | 5060021360670 |
| BDA025 | WH     | 25L   | 1   | 5060021360687 |
| BDA026 | WH     | 200L  | 1   | 5060021364364 |



# GB PRO

## MAXIMUM STRENGTH ADHESIVE & SEALANT





**THE ONLY TUBE YOU'LL EVER NEED**

DID YOU KNOW...

**GB PRO CAN BE APPLIED UNDER WATER. SEE OUR GB PRO VIDEO ON [WWW.BOND-IT.CO.UK](http://WWW.BOND-IT.CO.UK) FOR APPLICATIONS**

Dense & versatile ultra strength adhesive and sealant

COLOUR AS NOZZLE

# GB PRO

## ADVANCED MODIFIED POLYMER ADHESIVE & SEALANT

A high modulus product combining sealing and adhesive properties. A totally neutral “hybrid” sealant for use in areas requiring a tough elastic rubber joint or as an adhesive with superior bonding strength.

Conforms to EN15651-1; F INT.

### PROPERTIES:

- For interior and exterior applications in all weather conditions.
- Remains permanently flexible.
- Can be over-painted with waterbased paints.
- Non staining and will not discolour surfaces (excellent for use on natural stone).
- Non shrinking and rapid curing.
- Contains no isocyanates, solvents, silicone and phthalates.
- Excellent adhesion to most surfaces (even moist surfaces). Wet on wet surface application.
- No odour.
- Anti-pick properties (colours only).

### APPLICATION:

A universal, waterproof, construction adhesive and sealer for use with stone, concrete, mirrors (with an acetone resistant backing), natural stone, marble, gypsum board, polycarbonates, polystyrene, PVC, many plastics, ceramics, copper, lead, zinc, aluminium, stainless steel, wood and glass. **Note:** This product is not recommended for use with expansion joints or for installations where the joints are continually immersed in water. If allowed to cure in dark conditions or low UV light the product may yellow.



### PRODUCT SPEC:

| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDMSPWH | WH     | EU3  | 12  | 5060021364784 |
| BDMSPBL | BL     | EU3  | 12  | 5060021364883 |
| BDMSPGR | GR     | EU3  | 12  | 5060021364876 |
| BDMSPCL | CL     | EU3  | 12  | 5060021364944 |






# MEGA STIK

## POLYURETHANE CONSTRUCTION ADHESIVE

A fast curing, adhesive foam that has been specially developed for the rapid installation of plasterboard, insulation boards, floorboards and roof decking. Supplied in an aerosol can, the product can be used with a standard foam gun. A multi-purpose, polyurethane construction adhesive in a can - but not just a drywall adhesive.... the cured adhesive is an excellent heat insulator and has exceptionally good adhesion properties. Can also be used to dampen sound.

**APPLICATION:** Adheres well to most building materials, with the exception of Teflon, polyethylene and silicone surfaces. Suitable for installing doors and windows, insulating and fixing pipes, filling holes and gaps, fixing wall panels, skirting boards, roof tiles, decking and for thermal insulation.

- No mixing, no mess, no water, no dust!
- No need to carry heavy bags of plaster.
- One can fixes approximately 5 standard plaster boards.
- 30% time saving over conventional dry wall adhesives.
- Can be plastered in 1 hour.
- Can be applied direct to boards or the wall either horizontally or vertically.
- Can works on solid walls, metal and timber studding, battens and beams.
- No nails or screws required.

USE WITH BDAG1 OR BDAK45 APPLICATION GUNS PAGE 39

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDEFMS | BG     | 750ML | 12  | 5060021368171 |



## PU WOOD GLUE

One-part moisture cure polyurethane adhesives specially formulated for waterproof bonding. These products are seawater proof and are resistant to acid and chemicals. **Conforms to BS EN204 (Class D4 - strength).**

- **GEL FORMULATION:** A solvent-free, rapid setting, thixotropic, translucent PU gel which sets in 5 minutes.
- **LIQUID FORMULATION:** A solvent-free, rapid setting, brown, liquid PU adhesive which skins in 30 minutes.

**APPLICATION:** Excellent bonding properties suitable for all wood products including garden furniture, staircases, boats, sandwich panels and insulation materials to most common substrates. Suitable for interior and exterior applications.

### PRODUCT SPEC:



| CODE     | COLOUR | SIZE  | QTY | BARCODE       |
|----------|--------|-------|-----|---------------|
| BDAPU5   | T      | 300ML | 12  | 5060021363398 |
| BDAPU375 | BR     | 750ML | 6   | 5060021369338 |



## A43 THREADLOCK

A medium viscosity, medium strength screw and threadlocker. Used as a locking compound for direct application to lightly oiled components. Replaces spring washers and lock nuts. Allows for disassembly using the correct tools. Also prevents rusting or corrosion. Non-drip consistency for clean, economic application.

| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BIA4325 | B      | 25ML | 15  | 5060021366769 |
| BIA4350 | B      | 50ML | 15  | 5060021360311 |



## A70 STUDLOCK

A high strength, anaerobic adhesive for the permanent retention and sealing of threaded fasteners, sleeves and bearings. It is resistant to fuels, oils, hydraulic & refrigeration fluids. Also acts as a lubricant during assembly to ensure accurate torquing and protection against corrosion. Prevents rusting or corrosion and cannot be dismantled once adhesive has set.

| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BIA7025 | R      | 25ML | 15  | 5060021366770 |
| BIA7050 | R      | 50ML | 15  | 5060021360328 |



## HVC CYANOACRYLATE GLUE

A high viscosity cyanoacrylate adhesive developed for bonding rubber and plastics including PVCu. For use on porous surfaces. Also has gap-filling properties making it ideal for bonding trims and caps on PVCu windows as well as rubber, wood, metal, ceramics, MDF, leather, porcelain and card. Comes with a resealable cap. Set time range 10 to 30 seconds.

SUPPLIED IN A HANDY SELF MERCHANDISING DISPLAY BOX.



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| HVC1620 | CL     | 20G  | 25  | 5060021361080 |
| HVC1650 | CL     | 50G  | 20  | 5060021361097 |

## RGC CYANOACRYLATE GLUE

A medium viscosity superglue that fills gaps to 0.1mm. Fast setting at room temperature and is economical to use, ideal for perfect fit surfaces where rapid setting is required. Suitable for close fit non-porous substrates eg. most plastics, metals, glass, PVCu, rubber and EPDM. Set time 5 to 15 seconds.



SUPPLIED IN A HANDY SELF MERCHANDISING DISPLAY BOX.

| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| RGC2420 | CL     | 20G  | 25  | 5060021361103 |
| RGC2450 | CL     | 50G  | 20  | 5060021361110 |

## CYANOACRYLATE ACCELERATOR

Accelerates the rate of cure of cyanoacrylate adhesives. Improves bonding to difficult surfaces and prevents penetration of adhesive into porous materials. Speeds strength development.

| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BIC200 | CL     | 200ML | 12  | 5060021361127 |
| BIC400 | CL     | 400ML | 12  | 5060021368553 |



## MITRE KIT ADHESIVE

A high strength bonding system comprising a cyanoacrylate adhesive with an aerosol activator to ensure full and rapid curing on acid surfaces. Can be used for bonding MDF, wood, rubber and most plastics. Instant bonding properties considerably reduce assembly times for mitre joints especially where precision instant bonding is required. Cures in approximately 10 seconds. Pack includes 1 tin of Activator (200ml) and 1 bottle of HVC Superglue (50g).



| CODE | COLOUR | SIZE        | QTY | BARCODE       |
|------|--------|-------------|-----|---------------|
| BDMI | CL     | 50G & 200ML | 12  | 5060021361134 |

## MULTI-PURPOSE SPRAY LUBRICANT

A low viscosity solvent and oil blend, giving excellent penetrating properties. It is a high performance, multi-application fluid which has excellent de-watering, anti-corrosive and general lubricating properties.

Deep penetration aids dismantling rusted parts and fasteners and is ideal for lubricating locks, hinges and tools. Will help protect tools and metals from rusting and can be used as a starting aid for damp ignition systems, etc.



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BIMP400 | CL     | 400ML | 12  | 5060021361363 |

## SILICONE RELEASE SPRAY

Has a wide range of uses including mould releasing and lubrication in the automotive, engineering, food, clothing and upholstery industries, where the clean, low toxicity lubricating properties of silicone are ideal. Suitable in industries such as mould making / releasing, window and door frame installations, using rubber and EPDM gaskets, as well as jobs round the home, garage and workshop. Eases friction between surfaces. Eliminates noises & squeaking. This aerosol contains a special valve to restrict flammability.



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BISR500 | CL     | 500ML | 12  | 5060021361370 |

**DID YOU KNOW...** ALL TECHNICAL AND HEALTH AND SAFETY INFORMATION CAN BE DOWNLOADED FROM OUR WEBSITE: [WWW.BOND-IT.CO.UK](http://WWW.BOND-IT.CO.UK). ALSO FOLLOW US ON FACEBOOK & TWITTER FOR REGULAR NEWS UPDATES



## AEROSOL SPRAY ADHESIVE

Gives exceptionally strong adhesion for a wide range of demanding uses. Fitted with a variable discharge spray that controls the width of the fan. DCM Free. Use on wood, concrete, stone, tiles, rubber, foam, metals, rigid plastics, polyethylene, canvas fabrics, cardboard, paper and cork.

**APPLICATION:** It is ideal for perimeter bonding of carpet tiles and minor flooring installations, and for use in the furniture, and automotive industries, especially for bonding foam to a variety of surfaces. Also suitable for use in repair and non-structural applications where a high strength bond is required.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDA007 | 86     | 500ML | 12  | 5060021361929 |

## IT'S WHAT **MAKES** **BRITAIN** GREAT!

**bond it**

### PRODUCTS:

- ADHESIVES
- CHEMICALS
- COMPOUNDS
- BITUMEN
- SILICONE
- ACRYLICS
- GUNS
- PAINTS & DYES
- DPC
- PU FOAMS
- TILE ADHESIVE
- CLEANERS
- SUPERGLUES
- FILLERS
- TAPES

AND MUCH MORE



## WE STOCK IT!

**bond it**

# TILE ADHESIVES & GROUTS

A SPECIALLY FORMULATED RANGE OF CEMENT  
BASED AND READY MIXED CERAMIC TILE  
ADHESIVES AND GROUTS FOR USE  
ON FLOORS AND WALLS.



# TILE ADHESIVES & GROUTS

- READY MIXED
- CEMENT BASED
- CE APPROVED
- COVERS AN ARRAY OF SPECIALIST INSTALLATIONS

COLOUR GUIDE & ICON KEY - P. 198-199

## AQUA-TILE

An off-white, ready mixed, shower-resistant, instant grab tile adhesive that can be used as an all round interior grade ceramic wall tile adhesive. Has excellent bond strength and good coverage rates.

**APPLICATION:** Suitable for use in domestic power showers, kitchens, bathrooms, etc. It embodies unique 'non-slip' properties but allows for adjustment while fixing; in most cases this eliminates the use of battens. **Note:** It is unsuitable for swimming pools or other areas subject to total immersion. Not suitable for use with large format tiles.

Conforms to: EN12004 Type D2.

### PRODUCT SPEC:



RECOMMENDED  
FOR WALL TILES AND  
MOSAICS ONLY



Coverage: approx 2-3Kg/m<sup>2</sup>

| CODE   | COLOUR | SIZE   | QTY | BARCODE       |
|--------|--------|--------|-----|---------------|
| BDTA03 | ○ O/WH | 3.75KG | 1   | 5060021364593 |
| BDTA01 | ○ O/WH | 7.5KG  | 1   | 5060021360762 |
| BDTA02 | ○ O/WH | 15KG   | 1   | 5060021360779 |

## SUPER-GRIP

An off-white, waterborne, ready mixed adhesive paste, for use as an all round, interior grade, ceramic wall tile adhesive. Has a high spreadability rate.

**APPLICATION:** Suitable for use in kitchens, bathrooms, etc. provided it is used with a waterproof grout. It embodies unique 'non-slip' properties but allows for adjustment while fixing; in most cases this eliminates the use of battens. **Note:** It is unsuitable for swimming pools or where prolonged wet conditions exist. It should also not be used with porcelain tiles or in areas subject to rising or penetrating damp. Not suitable for use with large format tiles.

Conforms to:  
EN12004 Type D1T.



### PRODUCT SPEC:

Coverage: approx 2-3Kg/m<sup>2</sup>

RECOMMENDED FOR  
WALL TILES ONLY



| CODE   | COLOUR | SIZE       | QTY | BARCODE       |
|--------|--------|------------|-----|---------------|
| BDTA08 | ○ O/WH | 1.5KG      | 6   | 5060021364647 |
| BDTA06 | ○ O/WH | 7.5KG      | 1   | 5060021360786 |
| BDTA07 | ○ O/WH | TRADE PACK | 1   | 5060021360793 |

T: 01422 315300 • F: 01422 315310 • WWW.BOND-IT.CO.UK

## GRIPBOND CTA

A premium quality, off-white, waterborne, ready mixed adhesive paste for wall tiles. Suitable for use as an all round interior grade ceramic wall tile adhesive. Has superb grab and non-slip characteristics.



**APPLICATION:** Can be used in kitchens, bathrooms, etc. provided it is used with a waterproof grout. It embodies unique 'non-slip' properties but allows for adjustment while fixing; in most cases this eliminates the use of battens. **Note:** This product is unsuitable for use in swimming pools or where prolonged wet conditions exist. It should also not be used with porcelain tiles. Do not use in areas subject to rising or penetrating damp. Not suitable for use with large format tiles. **Conforms to:** EN12004 Type D1T.

### PRODUCT SPEC:

**Coverage:** approx 2-3Kg/m<sup>2</sup>

RECOMMENDED FOR  
WALL TILES ONLY



CLASS  
D1T



| CODE  | COLOUR | SIZE  | QTY | BARCODE       |
|-------|--------|-------|-----|---------------|
| BDA17 | ○ O/WH | 7.5KG | 1   | 5060021366221 |
| BDA18 | ○ O/WH | 15KG  | 1   | 5060021366214 |

## FIX 'N' GROUT

A brilliant white, ready mixed adhesive paste, for use as a thin-bed waterproof ceramic wall tile adhesive and joint filling grout. Suitable for fixing all types of ceramic wall tiles, including mosaics, porcelain and vitrified tiles in internal locations.



**APPLICATION:** For use in bathrooms, kitchens and shower areas, where the tile surface is subject to frequent wetting, but not total water immersion. Can be applied to gypsum plaster, cement fibreboard, existing tiles, cement render, timber panels and plywood composite boards. Recommended for use in areas such as shower/changing rooms, power showers, work tops and any tiled wall surface which is subject to persistent humidity or frequent wetting. The dual purpose application properties of Fix 'N' Grout make it particularly suited to small area DIY applications and localised repairs. **Note:** Not recommended for use with large format tiles. **Conforms to:** EN12004 Type D2.

### PRODUCT SPEC:

**Coverage:** approx 2-3Kg/m<sup>2</sup>

RECOMMENDED FOR  
WALL TILES ONLY



CLASS  
D2



| CODE  | COLOUR    | SIZE   | QTY | BARCODE       |
|-------|-----------|--------|-----|---------------|
| BDA10 | ○ HIGH WH | 1.5KG  | 6   | 5060021360809 |
| BDA11 | ○ HIGH WH | 3.75KG | 1   | 5060021360816 |

# STERI-GROUT

## MOULD RESISTANT FLEXIBLE FLOOR & WALL TILE GROUT

A specially formulated, polymer modified cement based floor and wall tile grout. Containing a strong fungicide it will also inhibit black spot mould growth and reduce dirt pick up. Can be used to grout joints from 2mm to 20mm.

**Conforms to:** EN13888 Type CG2W.

### PRODUCT CHARACTERISTICS:

- For joints 2-20mm.
- Fills deep joints in one application.
- Colourfast.
- Slump free.
- Flexible.
- Suitable for internal and external use.



**APPLICATION:** Suitable for use in areas of limited movement/vibration so ideal for use over timber ply-boards and heated sub-floors. Recommended for sanitary installations ie. kitchens, bathrooms, toilets and shower rooms. This grout has excellent adhesion characteristics to porcelain and fully vitrified tiles and has low permeability. For application details, drying times and open times please refer to technical data sheet.

### PRODUCT SPEC:

**Coverage:** approx 2m<sup>2</sup>/Kg (see data sheet)


CLASS  
CG2W

2-20MM  
GAP FILL

3KG



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDSGWH3 | ○ WH   | 3KG  | 5   | 5060021369581 |
| BDSGIV3 | ○ IV   | 3KG  | 5   | 5060021369604 |
| BDSGLS3 | ○ LS   | 3KG  | 5   | 5060021369628 |
| BDSGBL3 | ● BL   | 3KG  | 5   | 5060021369642 |
| BDSGGR3 | ○ GR   | 3KG  | 5   | 5060021369666 |



CHECK OUT OUR GIST SILICONE PAGE 35 - FOR COLOUR MATCHING SILICONE SEALANT TO STERI-GROUT ON SEALING WORK.

## FLOOR TILE GROUT

A grey cement-based, polymer modified wide joint filling compound for tile joints from 3mm up to 12mm wide around all types of ceramic floor tiles. Formulated to provide a flowable, readily compactable, grouting slurry, which can be easily applied across all types of ceramic tiled surfaces. Sets to a hard, durable, waterproof finish, suitable for interior and exterior applications, including swimming pools.

Conforms to EN13888 Type CG1.



### PRODUCT SPEC:

**Coverage:** approx 2m<sup>2</sup>/Kg (see data sheet)



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDFTG3  | GR     | 3KG  | 5   | 5060021369543 |
| BDFTG10 | GR     | 10KG | 1   | 5060021363497 |

## WALL TILE GROUT

A white cement-based, polymer modified narrow joint filling compound for tile joints up to 3mm wide around all types of ceramic wall tiles. Sets to a hard, durable, water-resistant finish, suitable for interior and exterior applications.

**APPLICATION:** Ideal for all types of ceramic tiled surfaces. This product is waterproof making it suitable for both internal and external applications, including kitchens, bathrooms and shower enclosures, swimming pools. In fully immersed locations, the inclusion of an acrylic latex additive in the grout mix can enhance water repellent properties. Quick and easy to apply, providing a smooth joint which is unaffected by water or weather.

Conforms to: EN13888 TYPE CG1.



### PRODUCT SPEC:

**Coverage:** approx 5m<sup>2</sup>/Kg (see data sheet)



| CODE     | COLOUR  | SIZE | QTY | BARCODE       |
|----------|---------|------|-----|---------------|
| BDWTG1   | HIGH/WH | 1KG  | 10  | 5060021363534 |
| BDWTG4   | HIGH/WH | 3KG  | 5   | 5060021369529 |
| BDWTG3   | HIGH/WH | 10KG | 1   | 5060021363510 |
| BDWTG3IV | IV      | 10KG | 1   | 5060021367563 |
| BDWTG4IV | IV      | 3KG  | 5   | 5060021369536 |

## FLEXIBLE WIDE JOINT GROUT

A cement-based, joint filling compound for tile joints from 3mm up to 20mm wide around all types of ceramic floor and wall tiles. A specially formulated (highly polymer modified) grouting compound for applications where tiles have been fixed with either a standard or flexible adhesive and where some slight degree of surface movement or vibration is anticipated. Provides a flowable, readily compactable, grouting slurry, that produces stable, floor tile joints without shrinking or cracking. Wide Joint Grout will set to a hard, durable, waterproof finish, suitable for interior and exterior applications and also in fully immersed locations such as swimming pools.

Conforms to: EN13888 Type CG1.



### PRODUCT SPEC:

**Coverage:** Depends on tile size, joint width and depth (see data sheet)



| CODE  | COLOUR | SIZE | QTY | BARCODE       |
|-------|--------|------|-----|---------------|
| BDFXG | GR     | 10KG | 1   | 5060021363619 |

## CTA FLEXIBLE

A white, thin-bed, ceramic tile adhesive, with excellent non-slip characteristics. Has a regular setting speed and forms a strong bond to fully vitrified tiles and is ideal for tile-on-tile work. Its flexibility allows it to be used on backgrounds subject to limited movement, flexing or vibration and underfloor heating systems. CTA Flexible is completely waterproof, frost-resistant and is suitable for interior and exterior use, particularly swimming pools, showers, saunas and bathrooms.

**APPLICATION:** For fixing all types of ceramic floor and wall tiles, porcelain, mosaics, natural stone and similar wall and floor finishes. Can also be used on timber panels, composite boards and impermeable surfaces.

Conforms to: EN12004 Type C2TES1.



### PRODUCT SPEC:

**Coverage:** approx 6-7m<sup>2</sup> @3mm/20Kg



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDCTAF | WH     | 20KG | 1   | 5060021363565 |



## RAPID-FLEX

A one-part, rapid setting, flexible floor and wall tile adhesive for professional use. Suitable for all types of ceramic floor and wall tiles, including mosaics, porcelain, natural stone and vitrified tiles.

**APPLICATION:** Ideally suited for application onto timber panels, wood floors, plywood, composite boards and impermeable surfaces, such as existing quarry tiles, mastic asphalt and power-floated concrete without the need to include a flexi-additive in the mix. Also suitable for use in areas with limited movement or vibration including underfloor heating. Can be used internally and will set sufficiently to receive light traffic in approximately 2-3 hours.

Conforms to: EN12004 Type C2F.



### PRODUCT SPEC:

**Coverage:** approx 6-7m<sup>2</sup> @3mm/20Kg



| CODE     | COLOUR | SIZE | QTY | BARCODE       |
|----------|--------|------|-----|---------------|
| BOTRFB   | GR     | 20KG | 1   | 5060021364005 |
| BOTRFBWH | WH     | 20KG | 1   | 5060021367969 |

## RAPID-SET

A fast-setting, thick or thin-bed adhesive for bonding ceramic tiles and mosaics to walls and floors. Because of these fast acting properties, tiles and mosaics can be grouted and suitable for use in approximately 2-3 hours after fixing (at normal room temperature). Interior use, particularly in locations which are subject to occasional wetting, eg. domestic showers, saunas and bathrooms.

**APPLICATION:** Ideal for bonding to concrete, cement/sand screeds, building blocks, brickwork and primed wooden surfaces. Certain surfaces may need to be suitably primed prior to fixing. See technical data sheet for details.

**Note:** This product is not suitable for swimming pools or areas subject to constant water immersion.

Conforms to: EN12004 Type C1F.



### PRODUCT SPEC:

**Coverage:** approx 6-7m<sup>2</sup> @3mm/20Kg



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDRS10B | GR     | 10KG | 1   | 5060021363411 |
| BDRS20B | GR     | 20KG | 1   | 5060021363404 |

## PORCELAIN AND NATURAL STONE TILE ADHESIVE

A specially formulated, flexible, non-slip, fast setting, cement based tile adhesive. Suitable for beds of 3-12mm, interior and exterior grade, for wall and floor installations.

Conforms to: EN12004 Class C2FT.

**APPLICATION:** This product has been developed for fixing ceramic, porcelain, large format, natural stone, marble, travertine and mosaic tiles to a variety of substrates including heated screeds and overboarded timber. PTA is water resistant making it suitable for use in bathrooms, saunas and swimming pools.

**Note:** We offer this product in 2 colours, white and grey; for porcelain or light coloured tiles, that may be subject to staining, you must use the white based powder to avoid trowel marks grinning through. For application details please refer to technical data sheet.



IDEAL FOR LARGE FORMAT  
NATURAL STONE TILES

### PRODUCT SPEC:

**Coverage:** approx 5m<sup>2</sup> @3mm/20Kg



| CODE     | COLOUR | SIZE | QTY | BARCODE       |
|----------|--------|------|-----|---------------|
| BDPTA20G | GR     | 20KG | 1   | 5060021369673 |
| BDPTA20W | WH     | 20KG | 1   | 5060021369512 |

## PRIMER AND FLEXIBLE AD-MIX

An acrylic dispersion for use as a primer prior to tiling or as an additive to cement based tiling products to improve adhesion and flexibility. As a primer it will prepare and stabilise porous and dusting surfaces prior to tiling and to improve adhesion on difficult substrates, such as vinyl tiles, timber, asphalt and terrazzo, etc. Also prevents swelling of timber, plasterboard and MDF. As an admixture it will improve the flexibility and adhesion of cement based adhesives and grouts in situations subject to slight movement or vibration.

**APPLICATION:** Refer to data sheet for application details.

### PRODUCT SPEC:

**Coverage:** approx 5-10m<sup>2</sup>/L as a primer.  
Up to 5L/20Kg as an admix.



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDTAP  | WH     | 5L   | 4   | 5060021363633 |
| BDTAP1 | WH     | 1L   | 10  | 5060021369437 |





## Tiling & Plumbing Solutions



Bond It with confidence ...  
*... like a duck to water!*



The One Stop Shop for  
all your plumbing and tiling  
requirements!



## BUILDING CHEMICALS

A COMPREHENSIVE RANGE OF PREMIUM  
GRADE BUILDING CHEMICALS, ADDITIVES  
AND GENERAL BUILDING ACCESSORIES.



# BUILDING CHEMICALS

- READY TO USE
- CAN BE ADDED DIRECT TO MIXES
- EASY APPLICATION
- LARGER SIZES ARE AVAILABLE OF OUR BUILDING CHEMICALS TO SPECIAL ORDER

COLOUR GUIDE & ICON KEY - P. 198-199

## BRICK & PATIO CLEANER

A powerful acid based cleaner that will remove cement and mortar splashes, grime, oil, grease and other difficult-to-remove stains, from brickwork, patios, garages, paving, concrete floors and warehouses.



**APPLICATION:** Apply by brush and allow to stand for 10-15 minutes - do not allow to dry out. Scrub with a stiff brush then rinse thoroughly using a hose pipe. Can be used undiluted for stubborn stains. To remove efflorescence dilute 4 parts water, brush on and rinse off. **Note:** this product will attack limestone and marble.

### PRODUCT SPEC:

**Coverage:** approx. 15-30m<sup>2</sup>/5L



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH080 | ⊗ CL   | 2.5L | 4   | 5060021361271 |
| BDH081 | ⊗ CL   | 5L   | 4   | 5060021361288 |
| BDH082 | ⊗ CL   | 25L  | 1   | 5060021361295 |
| BDH083 | ⊗ CL   | 200L | 1   | 5060021364180 |

**DID YOU KNOW...** ALL PRODUCTS MANUFACTURED AT BOND IT ARE DONE SO TO STRINGENT QUALITY CONTROL SYSTEM ACCREDITED TO ISO 9001.

## HIGH STRENGTH BRICK ACID

A super strength (18% hydrochloric acid) cleaner that will remove cement and mortar splashes from brickwork, paving, concrete floors and warehouses.



**APPLICATION:** Test a small area prior to application. Product should be diluted to recommended levels. Apply by stiff brush and allow to stand for 10-15 minutes. Do not allow to dry out. Scrub with a stiff brush then rinse thoroughly with a hose pipe. Can be used undiluted for stubborn stains. **Note:** this product will attack limestone, marble, stainless steel and aluminium.

### PRODUCT SPEC:

**Coverage:** approx. 30-60m<sup>2</sup>/5L



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH085 | ⊗ CL   | 5L   | 4   | 5060021367464 |
| BDH086 | ⊗ CL   | 25L  | 1   | N/A           |



## FROSTPROOFER & RAPID HARDENER

A high performance building chemical that increases frost resistance and accelerates setting time of cement by improving the rate of hydration. Specially developed for brick laying and rendering, etc. at low and sub-zero temperatures. Added to the mix, this product will improve workability and increase strength gain and resistance to water penetration. It allows up to a 15% reduction of gauging water, and can also reduce curing times and shrinkage. Will not degrade steelwork or wall tiles as formulation is chloride-free.



**APPLICATION:** Add to cement mix. Reduce the amount of gauging water as appropriate (maximum reduction 15%). At temperatures below 4°C the use of hot water is recommended. Conforms to: EN934-2 (2009).

### PRODUCT SPEC:

CHLORIDE-FREE



**Coverage:** approx. 1.5-2.25L /25Kg of cement

| CODE   | COLOUR     | SIZE | QTY | BARCODE       |
|--------|------------|------|-----|---------------|
| BDH030 | LIGHT BLUE | 5L   | 4   | 5060021361189 |
| BDH031 | LIGHT BLUE | 25L  | 1   | 5060021362391 |
| BDH032 | LIGHT BLUE | 200L | 1   | 5060021364203 |

## DUSTPROOFER & HARDENER

A premium quality, chloride-free, low viscosity liquid that penetrates and chemically seals concrete. Produces a hard wearing, non-dusty surface. Suitable for use on garage, warehouse, factory or workshop floors.



**APPLICATION:** Apply a uniform, thin coat onto the surface brushing in well - do not allow to puddle. Once the first coat has cured (normally overnight) apply a second coat. Very porous surfaces may need further applications. After last application leave for 24 hours to allow final coat to dry. Wash down once dry. **Note:** Do not use on masonry or coloured concrete. Very dense power floated floors may not permit effective penetration. Do not wash floor for 24 hours after final coat.

### PRODUCT SPEC:

**Coverage:** approx. 3-5m<sup>2</sup>/L

CHLORIDE-FREE



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH090 | ⊗ CL   | 5L   | 4   | 5060021361301 |
| BDH091 | ⊗ CL   | 25L  | 1   | 5060021364173 |
| BDH092 | ⊗ CL   | 200L | 1   | 5060021364197 |

## INTEGRAL WATER RESISTANT PLASTICISER

3 in 1 formulation: waterproofs, plasticises and retards. A high strength cement waterproofer for internal and external rendering, roof screeds, swimming pools, tanks, retaining walls, basement walls and reservoirs. Improves workability and plasticity of concrete and mortar in the wet state and resists water penetration even under pressure.

**APPLICATION:** Add to gauging water. To obtain maximum benefit the minimum amount of water should be used in the mix together with an appropriately rich cement to sand aggregate ratio. In application, the mortar must be well compacted to give a dense homogeneous body. Available as either a pink or green liquid.

Conforms to EN934-3 (2009) +A1 (2012).



### PRODUCT SPEC:

**Coverage:** approx. 0.25-0.5L/25Kg of cement



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH020 | PK     | 5L   | 4   | 5060021361165 |
| BDH021 | PK     | 25L  | 1   | 5060021361172 |
| BDH022 | PK     | 200L | 1   | 5060021364210 |
| BDH200 | GN     | 5L   | 4   | 5060021362452 |
| BDH201 | GN     | 25L  | 1   | 5060021362469 |
| BDH202 | GN     | 200L | 1   | 5060021362476 |

## LIQUID MORTAR PLASTICISER

A chemically balanced plasticiser, based on synthetic air entraining agents, designed to improve workability of brick laying and plastering mortars and increase their resistance to freeze-thaw cycles. Reduces the risk of cracking and crazing and the need for lime. Also available on special request, the original wood resin blend.

Conforms to EN934-3 (2009) + A1 (2012).



**APPLICATION:** Add to the cement mix.

### PRODUCT SPEC:

**Coverage:** approx. 100-150ml/25Kg of cement



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH010 | ● R    | 5L   | 4   | 5060021361141 |
| BDH011 | ● R    | 25L  | 1   | 5060021361158 |
| BDH012 | ● R    | 200L | 1   | 5060021364227 |
| BDH015 | ● BR   | 5L   | 4   | 5060021364722 |
| BDH016 | ● BR   | 25L  | 1   | 5060021364739 |
| BDH017 | ● BR   | 200L | 1   | 5060021364746 |

# MOULD STOP

## MOULD & MILDEW WASH

A premium grade, powerful cleaning agent formulated to remove mould, mildew, organic growth and lichen, etc.

- Removes and eradicates organic growth.
- Suitable for use on wood, concrete, plastic, stone and tarmac.
- Easy to use - just apply and leave to dry.
- Ideal for use at home, in the garden, for caravans and boats, public walk areas, in farm yards, kennels and stables.



Removes all types of organic green growth, algae, etc. from brick, stone, roof tiles, corrugated iron, lead, built up felt, concrete, wood, tarmacadam, painted surfaces, decking, garden furniture, pavements, plastic and glass. Can also be used on fabric awnings. Can be applied internally and externally.

**APPLICATION:** Use product neat, no need for dilution. Apply using either a spray, soft broom, paint brush or watering can. Apply and leave for a few days to dry to allow product to reach full strength. Kills mould and algae within 2-3 days of application and prevents re-growth for many months.

### PRODUCT SPEC:

Coverage: approx. 15m<sup>2</sup>/L



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH073 | CL     | 2.5L | 4   | 5060021367310 |
| BDH070 | CL     | 5L   | 4   | 5060021362346 |

HSE APPROVED: NO 9828

## SBR ADMIXTURE

A styrene butadiene copolymer latex, which increases flexibility of cement screeds and mortars and improves water and chemical resistance and durability. Suitable for internal and external floors and rendering in areas of continual or intermittent water and chemical contact. Excellent waterproofing admixture that improves adhesion of cementitious screeds and reduces shrinkage and cracking when repairing floor screeds. Also ideal as a bonding agent for new to old concrete.



**APPLICATION:** Can be used either as a bonding agent, as an admixture or general purpose primer (tiling, etc) see the relevant technical data sheet for details.

### PRODUCT SPEC:

Coverage: see data sheet.



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH040 | WH     | 5L   | 4   | 5060021361196 |
| BDH041 | WH     | 25L  | 1   | 5060021361202 |
| BDH042 | WH     | 200L | 1   | 5060021364234 |

## STABILIZING SOLUTION

A white, ready-to-use, water-based treatment for bonding and priming surfaces prior to painting and decorating. Suitable for interior and exterior use and can be applied to damp surfaces. Stabilises poor surfaces, seals and binds chalky or weathered areas, gives a sound base for decorating and is quick drying.



**APPLICATION:** For use as a pre-treatment for surfaces which are old, weathered, chalky or porous. Suitable for use on most substrates including concrete, cement, plaster, plasterboard, renders, pebble dash and MDF, etc. **Note:** Not to be applied when the temperature is below 5°C or when rain or frost is imminent.

### PRODUCT SPEC:

Coverage: approx. 6m<sup>2</sup>/L



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH130 | WH     | 5L   | 4   | 5060021364777 |

# PATIO BLASTER

## SIMPLE 3 STEP SYSTEM

A concentrated disinfectant for the removal and prevention of green mould, lichens and algae on hard surfaces. A simple 3 step system - dilute, apply, leave to dry! For use on: patios, tarmac and asphalt driveways, fencing, decking, pathways, roofing, painted & glazed pots, garden furniture and ornaments, weatherboard, brickwork, masonry, York stone, concrete, pebbledash, garden sheds, greenhouses, conservatories, gravestones, gravel, PVC, caravans, tennis courts and other artificial play/sports surfaces.

- INHIBITS MOULD GROWTH
- BIODEGRADABLE
- ANTI-BACTERIAL
- LONG LASTING
- NO BLEACH OR ACIDS
- NO SCRUBBING OR PRESSURE WASHING



### APPLICATION:

Dilute with water for normal use. Apply to dry surfaces using a low pressure water spray or watering can fitted with a rose.

### PRODUCT SPEC:

Coverage: approx. 3-7m<sup>2</sup>/L



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH108 | CL     | 2.5L | 4   | 5060021369826 |
| BDH109 | CL     | 5L   | 4   | 5060021369871 |

HSE APPROVED: NO 9830

## POWER-FROST

A fast-acting, concentrated building chemical that increases frost resistance and accelerates setting times of concrete. Fast-acting, chloride-free formula with controlled dosage to ensure consistency of mix. Less waste, easy to use and easily portable. This product will not degrade steel wall ties, reinforcements and other steel items.

Conforms to EN934-2 (2009).



### APPLICATION: SHAKE WELL BEFORE USE.

Using the bottle dosing cylinder, add 250 - 500ml per 25Kg of cement. Reduce the amount of gauging water as appropriate (maximum reduction 15%). This product is 5 times stronger than standard frost proofers.

### PRODUCT SPEC:

CHLORIDE-FREE



Dosage: approx. 500ml for every 25Kg of cement

| CODE  | COLOUR | SIZE | QTY | BARCODE       |
|-------|--------|------|-----|---------------|
| POWF1 | B      | 1L   | 10  | 5060021368867 |

## POWER-PROOF

A premium quality, concentrated waterproofing solution and render admixture. Addition of Power-Proof markedly improves the workability and plasticity of concrete. It is formulated to be non-corrosive, containing no chloride additives.

Conforms to EN934-3 (2009) + A1 (2012).

**APPLICATION:** To provide waterproofing for internal and external rendering, roof screeds, swimming pools, tanks, rendering walls, basement walls and reservoirs. The required amount of liquid is simply added to the gauging water. This product is 10 times stronger than standard integral waterproofer.



### PRODUCT SPEC:

CHLORIDE-FREE



Dosage: 25-50ml/25Kg of cement

| CODE  | COLOUR | SIZE | QTY | BARCODE       |
|-------|--------|------|-----|---------------|
| POWP1 | PK     | 1L   | 10  | 5060021364494 |



## POWER-MIX

A premium quality, concentrated mortar plasticiser designed to improve the workability of brick laying and plastering mortars, as well as increasing their resistance to freeze-thaw cycles. Use of Power-Mix also removes the need for lime and reduces the risk of cracking and crazing.

Conforms to EN934-3 (2009) + A1 (2012).

**APPLICATION:** Easy to use controlled dosage, simply add the required amount of liquid to the gauging water. This product is 20 times stronger than standard mortar plasticisers.



### PRODUCT SPEC:

**Dosage:** 1L is sufficient for 250 bags of 25Kg cement

| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| POWM05 | BR     | 500ML | 15  | 5060021364463 |
| POWM1  | BR     | 1L    | 10  | 5060021364470 |



**DID YOU KNOW...** USING OUR RANGE OF CONCENTRATES SIGNIFICANTLY REDUCES WASTE, PACKAGING & TRANSPORT COSTS.

## MOULD RELEASE OIL

A chemical release agent for mould and shutter surfaces prior to casting concrete, giving a clean release. After removal of formwork the concrete will have a smooth, uniform, hard finish with reduced incidence of blow holes.

**APPLICATION:** Suitable for use on plywood, timber, steel and plastic faced formwork. Coverage: up to 60m<sup>2</sup> per litre dependant on porosity. Apply before first pour and re-apply before subsequent pours immediately after stripping and cleaning the mould.



### PRODUCT SPEC:

**Coverage:** approx. 60m<sup>2</sup>/L

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH150 | STRAW  | 5L   | 4   | 5060021364289 |
| BDH151 | STRAW  | 25L  | 1   | 5060021367457 |



## PATINATION OIL

A protective coating for new and restored leadwork. Specially designed to minimize unsightly staining on newly applied lead and the materials fixed below it. Provides even colour and protects surfaces.

**APPLICATION:** The oil should be applied as soon as possible, immediately after each step of the leadwork has been completed. Apply using a soft absorbent cloth. Work horizontally from top to bottom maintaining a wet lower edge.



### PRODUCT SPEC:

**Coverage:** approx. 60m<sup>2</sup>/L



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDP005 | STRAW  | 500ML | 10  | 5060021367167 |
| BDP01  | STRAW  | 1L    | 10  | 5060021367150 |
| BDP02  | STRAW  | 2L    | 2   | 5060021367143 |

**USE IN CONJUNCTION WITH BOND IT FLASH-MATE LEAD SEALANT - PAGE 10.**

## POWDER MORTAR PLASTICISER

A resin based mortar plasticiser, supplied in a powder form, which can be effectively used for brick laying and rendering. An air entraining plasticiser that replaces lime in the mix, increasing both plasticity and workability to prevent shrinkage, cracking and crazing during the setting process. Will also provide a degree of resistance to freeze-thaw cycles.

Conforms to EN934-3 (2009).



**APPLICATION:** Add contents of sachet directly to the mixer at any stage or mix with the gauging water.

### PRODUCT SPEC:

**Coverage:** approx. 1 x 15g sachet for 2 x 25Kg of cement



| CODE  | COLOUR | SIZE             | QTY | BARCODE       |
|-------|--------|------------------|-----|---------------|
| BDPMP | BR     | 3KG/ 200 SACHETS | 1   | 5060021363572 |

## PLASTERERS PREGRIT

A ready-to-use internal plaster bonding agent with added aggregate to provide a key prior to plastering on smooth surfaces.

- Bonding agent for smooth surfaces.
- Contains sand/aggregate to provide plaster key.
- Ready-to-use, one coat application.
- Perfect for use on smooth substrates.
- Pigmented yellow to identify treated areas.
- Phthalate free formulation.



**APPLICATION:** As a primer / bonding agent aid prior to plastering on surfaces such as concrete, plaster and difficult, low or non-porous substrates. For internal use only, this product is not suitable for external applications.

### PRODUCT SPEC:

**Coverage:** approx. 4-5m<sup>2</sup>/L



| CODE   | COLOUR      | SIZE | QTY | BARCODE       |
|--------|-------------|------|-----|---------------|
| BDPG10 | PALE YELLOW | 10L  | 1   | 5060021368621 |
| BDPG05 | PALE YELLOW | 5L   | 1   | 5060021368638 |

## EXTERIOR PREGRIT

A ready-to-use, extra grip, render bonding agent containing aggregate to provide an improved key when applying render to exterior substrates.

**APPLICATION:** For use as an effective bonding agent for render to concrete, brickwork and block work outside. And as a bonding agent to improve adhesion to smooth surfaces. Simply apply 1 coat using a brush or roller ensuring an even coat and leave to dry for a minimum of 6 hours prior to applying render. This product is coloured light green to identify treated areas.

- Bonding agent for exterior walls.
- For use on concrete, brickwork, light block work, etc.
- Single application, render once cured.
- Reduces suction on porous surfaces.
- Improves adhesion on smooth surfaces.
- This product is waterproof.



### PRODUCT SPEC:

**Coverage:** approx. 3m<sup>2</sup>/L



| CODE    | COLOUR     | SIZE | QTY | BARCODE        |
|---------|------------|------|-----|----------------|
| BDEPG10 | PALE GREEN | 10L  | 1   | 50600213689710 |

# TANKING SLURRY

## WATERPROOF CEMENT BASED COATING

A cementitious waterproof coating designed for use below and above ground for cellars, retaining walls, and tanks. A blend of Portland cements, quality graded aggregates and chemical modifiers, which provide a waterproof coating system.



- High water resistance (Conforms to: EN998-1 (2010)).
- Excellent adhesion to most common building materials – see surface preparation.
- Water based - safe to apply on damp surfaces.
- Easy application - applied by brush.
- Resistant to positive and negative water pressure up to 7 Bar.

**APPLICATION:** For use on tanks, pits and swimming pools, above and below ground walls and floors, cellars, underground rooms, interior spaces, e.g. ducting, party walls, lift shafts and fish ponds. Please refer to Technical Data Sheet for application details.

### PRODUCT SPEC:



**Coverage:** approx. 12m<sup>2</sup>/20KG

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH107 | GR     | 20KG | 1   | 5060021369727 |



**USE WITH BOND IT PLUG-IT TO PLUG ANY RUNNING WATER LEAKS - P90**

## PLUG-IT CEMENT BASED RAPID SETTING PLUG

A cement based rapid setting compound for plugging running water leaks and overcoating joints, prior to the application of Bond It Tanking Slurry. Cures in less than 2 minutes.

- Rapid setting.
- Seals and fills cracks and joints.
- Plugs running water leaks.
- Can be used to anchor fixings.



**APPLICATION:** Mix with water into a putty, with a gloved hand or trowel plug the mixture in to hole or crack and press hard until the plug is set. Refer to Technical Data Sheet for full application details.

### PRODUCT SPEC:




| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH106 | GR     | 5KG  | 1   | 5060021369758 |

## CEMQUIK

A cement based product which is simple to apply and sets hard in approximately 30 minutes. For use as a patch repair or where installations require a fast repair job. For internal and external repairs to most masonry substrates; for gap and crack filling, jointing and sealing earthenware pipes and drains, patching steps and windowsills, setting and bedding WC's, sinks, railings and posts. Fills holes and cracks in concrete, brick, blocks and stone. Sets in the cold and wet.

Conforms to EN1504-3.

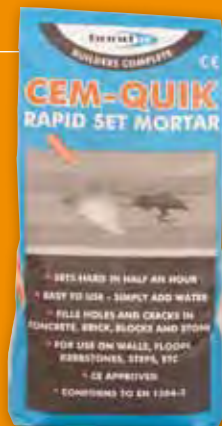

**APPLICATION:** Add water and mix to a smooth mortar. Apply using a trowel or filling knife. Can be applied up to a thickness of 25mm.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDCQM3 | GR     | 3KG  | 4   | 5060021369321 |

# FIRE CEMENT

## RESISTANT TO HIGH TEMPERATURES



A buff coloured, cement which has a consistency similar to putty. It is resistant to high temperatures and is both air and heat setting. Once cured the mortar will resist temperatures up to 1250°C. Ready to use, blend of high quality clays and selected fillers that sets rock hard when exposed to heat. Does not contain asbestos.

### APPLICATION:

Suitable for use on any surface that is exposed to high temperatures including:

- Fitting continuous burning fires.
- Jointing iron flue pipes.
- Building and repairing firebacks.
- Mending cracked and broken bricks in grates and stoves.
- Pointing between metals and bricks.

**Note:** The cement is water soluble and should not be used outside or where joints can be eroded by water.

### PRODUCT SPEC:

**Coverage:** approx. 3-5m<sup>2</sup>/Kg



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDCF005 | BU     | 5KG  | 1   | 5060021362605 |
| BDCF002 | BU     | 2KG  | 6   | 5060021362599 |



# LEVELMASTER AD-FLOOR

## ONE PART, FAST SETTING LATEX FLOOR LEVELLING COMPOUND

A protein-free, premium grade cementitious floor levelling compound suitable for use at thicknesses from 2mm to 50mm. When mixed with water it can be used to level internal floors providing an ideal base for most floor types.

Conforms To: EN13813 CT-C40-F10.

### BENEFITS:

- Self smoothing.
- Suitable for application depths between 2-50mm.
- Suitable for external use prior to the application of tiles.
- Can be used to patch repair rough concrete on domestic driveways and paths subject to foot traffic and light and wheeled traffic.
- Can be used on domestic garage floors prior to painting with a suitable floor paint.
- Suitable for use with underfloor heating.
- Casein free formulation
- Water mix.

REFER TO THE DATA SHEET FOR  
APPLICATION DETAILS.



### PRODUCT SPEC:



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDH 105 | GR     | 20KG | 1   | 5060021369420 |

# LEVELMASTER AD-FLOOR PLUS

## HIGH PERFORMANCE PROTEIN- FREE LEVELLING COMPOUND

A protein-free, high performance cementitious floor levelling compound suitable for use at thicknesses from 3mm to 50mm (10 to 60mm bulked with 3mm granite chippings).

Conforms to EN13813 CT-C25-F6.

### BENEFITS:


- High early strength.
- Suitable for application up to 50mm in one layer.
- Pumpable.
- Can be applied at 3 to 50mm thickness.
- Low odour formulation.
- Water mix.

### APPLICATION:

An ideal underlay for levelling most common internal subfloor prior to the installation of floor coverings such as ceramic floor tiles, carpet, vinyl and wood flooring (minimum levelling thickness 3mm). Suitable for use with underfloor heating.



### PRODUCT SPEC:



Coverage: approx. 4m<sup>2</sup> @ 3mm/ 20Kg

| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDH 110 | GR     | 20KG | 1   | 5060021369888 |

# LEVELMASTER SELF-LEVELLING COMPOUND



A chloride-free, water based cementitious flooring compound that provides a level base for internal floors. An ideal, economical, underlay for all modern floor finishes.

Conforms to EN143813 CT-C16-F4.

- Sets hard within 2-3½ hours depending on temperature.
- Coverings may be laid 6-8 hours after application.
- Pre-blended requiring only the addition of water.
- Economical.
- Can be trowelled to a feather edge.

**PRODUCT SPEC:** CHLORIDE-FREE



| CODE    | COLOUR | SIZE | QTY | BOX BARCODE   |
|---------|--------|------|-----|---------------|
| BDH100B | GR     | 10KG | 1   | 5060021361318 |
| BDH102B | GR     | 20KG | 1   | 5060021363282 |

## LEVELMASTER LATEX LIQUID

A polymeric, casein-free, liquid latex for use with LevelMaster Self-Levelling Compound. Will improve adhesion and wearing properties when added to Levelling Compounds. Suitable for use on concrete, well braced timber, mastic asphalt and quarry tiles when used with BDH100/102B.

**PRODUCT SPEC:**



| CODE   | COLOUR | SIZE | QTY | BOX BARCODE   |
|--------|--------|------|-----|---------------|
| BDH111 | WH     | 4.5L | 4   | 5060021361349 |

Quick Grab

# GRIPBOND

NON-SLUMPING, MULTI-PURPOSE, GAP-FILLING ADHESIVE.

## THINGS TO DO!

1. Place an order for Quick Grab Gripbond
- 2.
- 3.
- 4.
- 5.
- 6.
- 7.
- 8.
- 9.
- 10.
- 11.
- 12.
- 13.
- 14.
- 15.
- 16.
- 17.
- 18.
- 19.
- 20.

**bond it**

Unit G16, River Bank Way, Lowfields Business Park, Elland, West Yorkshire. HX5 9DN.  
t: 01422 315300 f: 01422 315310  
e: sales@bond-it.co.uk

## PAPER TOWELS

Extra strong, 2 ply paper towels.  
Ideal for glass, mirror, industrial and home cleaning jobs.

Sheet dimensions:  
150m x 195mm / 375 sheets per roll.



### PRODUCT SPEC:

| CODE  | COLOUR | SIZE         | QTY | BARCODE |
|-------|--------|--------------|-----|---------|
| BDP76 | WH     | 150M X 195MM | 6   | N/A     |

## MULTI-WIPES

Multi-purpose trade wipes for hands, tools and surfaces. Cleans paint, adhesive, sealant, expanding foam, bitumen, oil, grease and much more! Comes in handy re-sealable tub (foil sealed to prolong shelf life).

- Ideal for the workshop, office, home or on the move.
- No need for water, soap and cleaners.
- No need for dirty towels.
- One wipe does the job!!
- Contains Aloe Vera to minimise any irritation on skin.
- Now with anti-bacterial action effective against E-Coli, MRSA, Salmonella and Listeria.



### PRODUCT SPEC:

| CODE   | COLOUR | SIZE     | QTY | BARCODE       |
|--------|--------|----------|-----|---------------|
| BDHW80 | WH     | 80 WIPES | 8   | 5060021364753 |

## FOIL SAFE

A non-dissolving cleaner for use on unplasticised uPVC profiles and profiles covered by foils. A non-flammable, user friendly formulation that is ideal for the safe and effective removal of uncured PU foam, uncured silicone, label / foil protection adhesive deposits, wax, pen, wet bitumen products, sealing compounds and general dust, dirt, grime and debris.

**Note:** If Foil Safe is being used to prepare areas prior to the application of a sealant or adhesive, ensure that all residue is removed as this could hinder adhesion.

### PRODUCT SPEC:

| CODE   | COLOUR | SIZE | QTY | BARCODE      |
|--------|--------|------|-----|--------------|
| BDC007 | CL     | 1L   | 12  | 506002138645 |



## GLASS CLEANER

Fast-acting, high quality glass cleaner with a non-smear formula. Also excellent for cleaning mirrors. Trigger spray for easy application on 1L bottle.

### PRODUCT SPEC:

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDC001 | CL     | 1L   | 12  | 5060021361042 |
| BDC004 | CL     | 25L  | 1   | 5060021362209 |



## PVCU CREAM CLEANER

An effective solvent-free cleaner for uPVC frames, cladding and trims. Also suitable for use around the house, ideal for cleaning taps, trims, plastic or enamel baths and tiles. Removes dirt and stains and can be buffed to give a deep sheen finish. Non-corrosive.

### PRODUCT SPEC:

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDC002 | WH     | 1L   | 12  | 5060021361059 |



## PVCU SOLVENT CLEANER

Fast-acting, solvent-based cleaner for uPVC frames, cladding and trims. Effectively removes ingrained dirt and restores surface colour without leaving a residue. **Note:** For wood grain PVC finishes use Bond It Foil Safe Solvent Cleaner.

### PRODUCT SPEC:

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDC003 | CL     | 1L   | 12  | 5060021361066 |
| BDC005 | CL     | 25L  | 1   | 5060021362193 |







## DRYWALL SCRIM TAPE

A high strength, 100% fibreglass close weave (9 x 9 per sq inch) mesh scrim tape that will not blister or bubble. Self-adhesive backing. Eliminates the need for pre-plastering, provides extra reinforcement and saves time and money.

### PRODUCT SPEC:

SIZE: 90M X 2", 90M X 3", 90M X 4"

| CODE  | COLOUR | SIZE | QTY | BARCODE       |
|-------|--------|------|-----|---------------|
| BDDJ2 | WH     | 2"   | 24  | 5060021362940 |
| BDDJ3 | WH     | 3"   | 18  | 5060021363879 |
| BDDJ4 | WH     | 4"   | 12  | 5060021368737 |

### TAPE STRUCTURE

| CHARACTERISTICS            | STD VALUES           | TOLERANCE |
|----------------------------|----------------------|-----------|
| BACKING                    | 100% FIBREGLASS      |           |
| ADHESIVE                   | ACRYLIC              |           |
| TOTAL THICKNESS            | 0.2-0.3MM            | +/- 5%    |
| MASS PER UNIT AREA         | 65 GR/M <sup>2</sup> | +/- 5%    |
| TREATMENT ALKALI RESISTANT | 18%                  | +/- 5%    |
| TENSILE STRENGTH AJ WARP   | 700 N/CM             | +/- 5%    |
| BJ WEFT                    | 600 N/CM             | +/- 5%    |
| ELONGATION                 | 4%                   | +/- 5%    |

## MASKING TAPE

A premium grade, buff coloured tape for masking and marking when decorating.

### PRODUCT SPEC:

SIZE: 25MM, 36MM, 48MM, 72MM X 50M

| CODE   | COLOUR | SIZE | QTY   | BARCODE       |
|--------|--------|------|-------|---------------|
| BDMT25 | BU     | 25MM | 6 X 6 | 5060021363909 |
| BDMT38 | BU     | 36MM | 4 X 6 | 5060021363916 |
| BDMT48 | BU     | 48MM | 4 X 6 | 5060021363923 |
| BDMT75 | BU     | 72MM | 4 X 3 | 5060021364135 |

### TAPE STRUCTURE

| CHARACTERISTICS         | STD VALUES             | TOLERANCE |
|-------------------------|------------------------|-----------|
| BACKING                 | IMPREGNATED PAPER      |           |
| ADHESIVE                | SYNTHETIC RUBBER RESIN | +/- 5%    |
| TOTAL THICKNESS         | 130MU                  | +/- 5%    |
| MD TENSILE STRENGTH     | 35 N/CM                | +/- 5%    |
| MD ELONGATION AT BREAK  | 8%                     | +/- 5%    |
| ADHESION TO STEEL PLATE | 5 N/CM                 | +/- 10%   |
| ROLLING BALL TACK       | < 5CM                  |           |

## DUCT TAPE

A water-resistant, all-purpose, premium quality duct tape for binding, fixing, sealing, repairing, joining, protecting, marking and much more!

### PRODUCT SPEC:

SIZE: 50M X 48MM

| CODE     | COLOUR | SIZE | QTY | BARCODE       |
|----------|--------|------|-----|---------------|
| BDDT48   | SILVER | 48MM | 24  | 5060021363893 |
| BDDT48BL | BLACK  | 48MM | 24  | 5060021364333 |

### TAPE STRUCTURE

| CHARACTERISTICS         | STD VALUES                | TOLERANCE |
|-------------------------|---------------------------|-----------|
| BACKING                 | LAMINATED SYNTHETIC CLOTH |           |
| ADHESIVE                | SYNTHETIC RUBBER RESIN    | +/- 5%    |
| TOTAL THICKNESS         | 0.19MM                    | +/- 5%    |
| MD TENSILE STRENGTH     | 30 N/CM                   | +/- 10%   |
| ADHESION TO STEEL PLATE | 4 N/CM                    |           |
| ROLLING BALL TACK       | 1CM                       |           |
| SERVICE TEMPERATURE     | 0-60 C                    |           |

**DID YOU KNOW...** SEE OUR NEW SAVES NAILS TAPE ON PAGE 52 AND THE INNOVATIVE RESCUE TAPE FOR EMERGENCY REPAIRS ON PAGE 157.



## ANTI-CLIMB PAINT

A non-oxidising, specialist coating, developed to deter and prevent unwanted intruders from entering premises. Formulated to remain soft and slippery, it also contains an identifying agent which will mark who comes into contact with it.

**APPLICATION:** Developed in conjunction with crime prevention officers, it is easily applied to most surfaces, including metal and wooden fences, brick walls, sills, gutters, fall pipes, roofs and even chain fencing. Once applied, the coated surfaces will be virtually impossible to climb or scale.



### PRODUCT SPEC:

**Coverage:** approx. 0.5-1m<sup>2</sup>/2Kg



| CODE     | COLOUR | SIZE | QTY | BARCODE       |
|----------|--------|------|-----|---------------|
| BDACPBL1 | ● BL   | 2KG  | 4   | 5060021363794 |

## POWDERED CEMENT DYE

A range of easy-to-use, chloride-free permanent cement colourants. Manufactured with the best quality oxide pigments for permanently colouring all types of mortars cement, concrete and renderings. Easy dispersion of pigment into the mix allows for uniform shades per batch, colour can be adjusted to give a wider variety of shade depths.

Conforms to EN12878.



**APPLICATION:** Add to mix before addition of water.

### PRODUCT SPEC:

CHLORIDE-FREE



**Coverage:** approx. 5Kgs dye to 2x25Kg of cement

| CODE     | COLOUR | SIZE | QTY | BARCODE       |
|----------|--------|------|-----|---------------|
| BDH060BL | ● BL   | 1KG  | 6   | 5060021361233 |
| BDH060BR | ● BR   | 1KG  | 6   | 5060021361240 |
| BDH060R  | ● R    | 1KG  | 6   | 5060021361257 |
| BDH060Y  | ● Y    | 1KG  | 6   | 5060021361264 |

# LINE-IT

## LINE MARKER PAINT

A lead-free, high performance, quick drying resin system line marking paint. Hard wearing, fast drying, excellent UV stability, CFC free and non-clogging! Semi-permanent formulation, lasts approximately up to 3 months after application.

**APPLICATION:** Suitable for interior and exterior use, e.g. car parks, tennis courts, factories, warehouses, gymnasiums, schools, etc. Can be used on asphalt, concrete, wood composites gravel and grass.




### PRODUCT SPEC:

**Coverage:** approx. 60-100m line of 500mm width



| CODE    | COLOUR | SIZE  | QTY | BARCODE       | SITE USE           |
|---------|--------|-------|-----|---------------|--------------------|
| BDLM001 | ● Y    | 750ML | 12  | 5060021362551 | GENERAL            |
| BDLM002 | ● WH   | 750ML | 12  | 5060021362568 | GENERAL            |
| BDLM003 | ● R    | 750ML | 12  | 5060021362575 | ELECTRICITY        |
| BDLM004 | ● B    | 750ML | 12  | 5060021362834 | WATER              |
| BDLM005 | ● GN   | 750ML | 12  | 5060021364142 | CABLE WORK         |
| BDLM006 | ● O    | 750ML | 12  | 5060021364159 | COVERING OLD LINES |
| BDLM007 | ● BL   | 750ML | 12  | 5060021364166 | GENERAL            |



# Drive Alive

revive your drive...



**SIMPLE SYSTEM  
TO REVITALISE  
YOUR CONCRETE  
DRIVES OR  
PATHWAYS**



**REMOVE STAINS**

**RETARD ALGAE GROWTH**

**ENHANCE COLOUR**

**EASY POINTING**

**SYSTEM FOR BLOCKS & PAVINGS**

**LANDSCAPE MEMBRANES**

**POT HOLE REPAIRER**



**NEW  
DECKING  
RANGE**

**bond it**

**REVIVE YOUR DRIVE**


[www.yourdrivealive.co.uk](http://www.yourdrivealive.co.uk)

[www.bond-it.co.uk](http://www.bond-it.co.uk)

**bond it**

**CLEANIT**

A RANGE OF HIGH PERFORMANCE  
SURFACE CLEANERS FOR A VARIETY  
OF HOUSEHOLD MATERIALS.

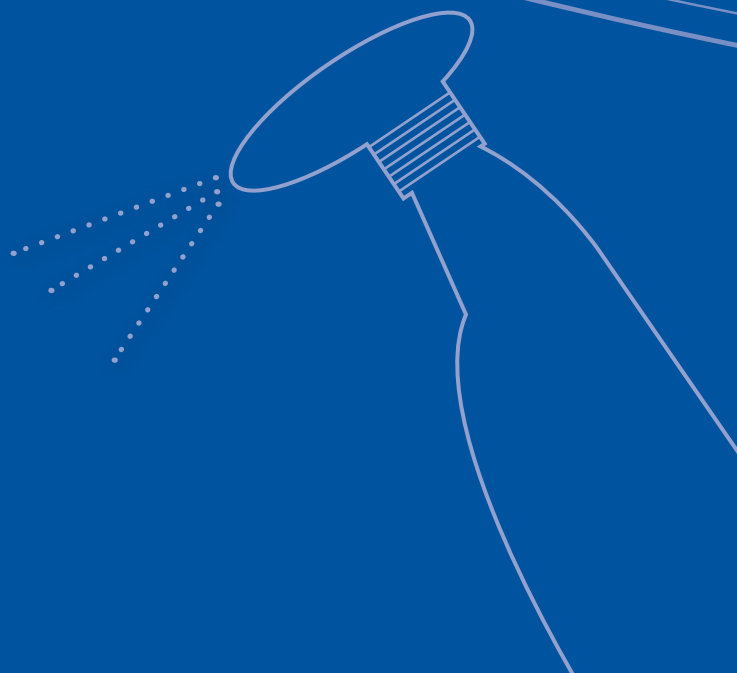



# CLEANIT

- EASY SPRAY APPLICATIONS
- SAFE FORMULATIONS
- POWERFUL CLEANING PROPERTIES
- IDEAL FOR USE AROUND THE HOME

COLOUR GUIDE & ICON KEY - P. 198-199

NEVER COMPROMISE ON QUALITY!

## LAMINATE & WOOD CLEANER

A non-flammable, non-abrasive, mild organic cleaner for the safe and effective removal of grease, oil, grime, marks and general domestic soiling from all treated laminate and solid wood surfaces.

**APPLICATION:** For use on all treated laminate and solid wood surfaces.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDC010 | OPAQUE | 500ML | 12  | 5060021368867 |



## ORGANIC CLEANER & DEGREASER


A non-flammable, non-abrasive, user friendly, general purpose cleaner and degreasing agent with a citrus aroma.

**APPLICATION:** Formulated from organic ingredients it will remove unsightly marks, dirt, grease, oil, grime and debris from non-porous, plastic, polished, painted and varnished surfaces.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDC011 | ORANGE | 500ML | 12  | 5060021368492 |



## NON-SMEAR GLASS CLEANER

A fast-acting, streak-free glass cleaner for the safe and effective removal of all common contaminants such as traffic fumes, nicotine, soot and finger marks.

**APPLICATION:** For mirrors and glass or tiled ceramic surfaces. Use with Bond It Paper Towel page 96, for streak free finish.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDC015 | BLUE   | 750ML | 12  | 5060021368836 |



MATE  
PREMIERE  
DECORATIONS  
ADHESIVES  
TILE ADHESIVES  
BUILDING  
CLEAN IT  
ECO  
DRIVE ALIVE  
BITUBOND  
PLUMBING  
FLOORING  
RESCUE

T: 01422 315300 • F: 01422 315310 • WWW.BOND-IT.CO.UK

## SHOWER SCREEN & TILE CLEANER

Simply spray and walk away. A sanitizing cleaner for shower screens and trays, tiles, taps, shower heads, baths and basins. Can also be used on bathroom mirrors and prevents misting. Removes soap scum and hard water build-up. When dried it leaves an invisible barrier which deters further soiling.

**APPLICATION:** Simply spray onto surface to be cleaned and leave to dry. No need to scrub. Use regularly to remove any build up for best results.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDC016 | OPAQUE | 750ML | 12  | 5060021368409 |



**DID YOU KNOW...**  
SHOWER SCREEN & TILE CLEANER LEAVES AN INVISIBLE BARRIER WHICH DETERS FURTHER SOILING, GIVING LONG LASTING PROTECTION & SANITISATION TO YOUR BATHROOM.

## NATURAL TILE SEALER & POLISH

A high sheen, gloss sealer and polish for natural stone and unglazed wall and floor tiles.

### APPLICATION:

Use to seal porous natural stone and slate work tops.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDC013 | OPAQUE | 500ML | 12  | 5060021368614 |

# MOULD STOP

## POWERFUL MOULD & MILDEW REMOVER

A premium grade mould and mildew wash for removing mould, mildew and lichen from walls, roofs, windows, doors and floors of most types. For internal and external use. For removing and retarding the regrowth of mould, mildew and lichen from walls, roofs, windows, doors and floors of most types. Supplied in easy spray formulation for easy application, particularly for internal use.

### APPLICATION:

Spray on the area to be treated, brushing in to cracks and crevices, with a paint brush or scrubbing brush. Mould Stop will kill mould and algae within 2-3 days of application and will prevent re-growth for many months.



### PRODUCT SPEC:

**Coverage:** approx. 15m<sup>2</sup>/L



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDC014 | CLEAR  | 500ML | 12  | 5060021368829 |

**HSE APPROVED: NO. 9828**

# GRAFFITI REMOVER

## NON-TOXIC LOW ODOUR



A safe, non-toxic alternative to traditional Methylene Chloride, Dichloromethane (DCM), N-Methyl-Pyrrolidone (NMP) or other toxic, harmful or flammable, solvent-based products. Based on ingredients that are not harmful to human health or the environment with a low/non-toxic odour.

### APPLICATION:

Non-drip, brush or spray applied formulations, ideal for use on vertical surfaces. Effective removal of ink, permanent pen, spray aerosol or brushable acrylic paints from a variety of substrates including: wood, concrete, metal, glass, brick, stone, many plastics and even some previously painted surfaces.

**NOT SUITABLE FOR USE ON PLASTIC, USE BOND IT MULTI-WIPES (BDHW80 - PAGE 96)**



NEW  
750ml  
SIZE



### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDGR1   | CLEAR  | 1L    | 10  | 5060021368997 |
| BDGR750 | CLEAR  | 750ML | 12  | 5060021369505 |

## PAINT STRIPPER

An effective remover of water or oil based paints and varnish from a variety of substrates including: wood, concrete, metal, glass, brick and stone. Also effective in the removal of polyurethane, epoxy, polystyrene, polyester and industrial adhesives. Non-drip, brush applied formulation, ideal for use on vertical surfaces.

- Non-toxic or carcinogenic.
- Multi layer removal.
- Remains active for up to 24 hours.
- Low odour.
- Non-flammable.
- Non-drip formulation.
- Water based.

**Note:** This product is the safer, non-toxic alternative to traditional Methylene Chloride, Dichloromethane (DCM), -Methyl-Pyrrolidone (NMP) or other toxic, harmful or flammable solvent based products.



### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDPS05 | CLEAR  | 500ML | 6   | 5060021369000 |
| BDPS1  | CLEAR  | 1L    | 6   | 5060021369017 |

## LIMESCALE REMOVER

Fast acting limescale removal for use in kitchens and bathrooms. Safely removes limescale and dirt from sanitary ware, tiles & shower screens.

- Removes limescale.
- Removes soap scum.
- Leaves a brilliant shine.

**APPLICATION:** Fast acting limescale removal and helps prevent build-up on showers and baths, sinks and basins, taps, plugholes, shower heads, shower screens, tiles and toilet bowls. Also suitable for use on acrylic and plastic surfaces.



### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDC009 | CLEAR  | 500ML | 12  | 5060021369765 |





# DRAIN BLASTER



## DISSOLVES BLOCKAGES

A sodium hydroxide based drain unblocker for dissolving blockages and eradicating bad odours.

### APPLICATION:

Suitable for use in sinks, showers and pipes. Simply empty contents down plughole and leave to work for 20 minutes.

- Dissolves blockages in 20 minutes.
- Kills germs and eliminates bad odours.
- For use in sinks, showers and bath plug holes.
- Safe to use in all pipes.
- Sinks through standing water.



### PRODUCT SPEC:



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDC008 | CLEAR  | 500g | 16  | 5060021369567 |

**bond it**

## ECORANGE

AN ECO-FRIENDLY RANGE OF PRODUCTS  
OFFERING SAFER AND LOW ENVIRONMENTAL  
IMPACT ALTERNATIVES TO TRADITIONAL  
SOLVENT-BASED PRODUCTS.

# ECO RANGE

- SOLVENT-FREE
- LOW HAZARD
- LESS ENVIRONMENTAL IMPACT

COLOUR GUIDE & ICON KEY - P. 198-199

## ECO CEM-KLENE

A fast acting cement, concrete and mortar cleaner with low environmental impact.

- Non aggressive.
- Non corrosive.
- Biodegradable formula.
- Removes wet and cured cement, mortar and concrete.
- Removes efflorescence.
- Cleans stains from pathways and patios.
- Cleans tools and cement mixers.



**APPLICATION:** Safer than traditional hydrochloric acid based stain removers, Cem-Klene can be used neat or diluted to treat areas and clean tools. Suitable for cleaning tools, cement mixers and removing efflorescence and mortar stains from walls, patios and paths. Can be diluted and used as a general purpose cleaner for ingrained dirt, grease and stains on concrete.

**COVERAGE:** Approx 10m<sup>2</sup> per litre of diluted product depending on porosity of substrate.

### PRODUCT SPEC:

**Coverage:** approx 10m<sup>2</sup>/L

| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDECEM5 | CL     | 5L   | 4   | 5060021369734 |
| BDECEM1 | CL     | 1L   | 12  | 5060021369741 |



## ECO HYDRO CLEAN

### TOTALLY SOLVENT FREE UPVC CLEANER & RESTORER

A water-based formulation for use on both white and plastic veneered PVCu frames, claddings and trims for removing ingrained dirt and stains.

- Water-based
- Solvent-free
- Low hazard
- Non flammable

**APPLICATION:** Apply to a soft absorbent cloth and rub onto the surface. For very soiled, ingrained or stubborn deposits, a further application may be required.



### PRODUCT SPEC:

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDEWS1 | CL     | 1L   | 12  | 5060021369284 |



T: 01422 315300 • F: 01422 315310 • WWW.BOND-IT.CO.UK

# POINT OF SALE

We have a comprehensive range of point of sale display items and merchandising stands to help display our product range.




PLEASE SEE OUR MERCHANDISING SECTION  
FOR MORE DETAILS - PAGE 159

**bond it**

## DRIVEALIVE

SIMPLE 3 STEP SYSTEM TO REVITALISE  
YOUR CONCRETE DRIVES OR PATHWAYS.

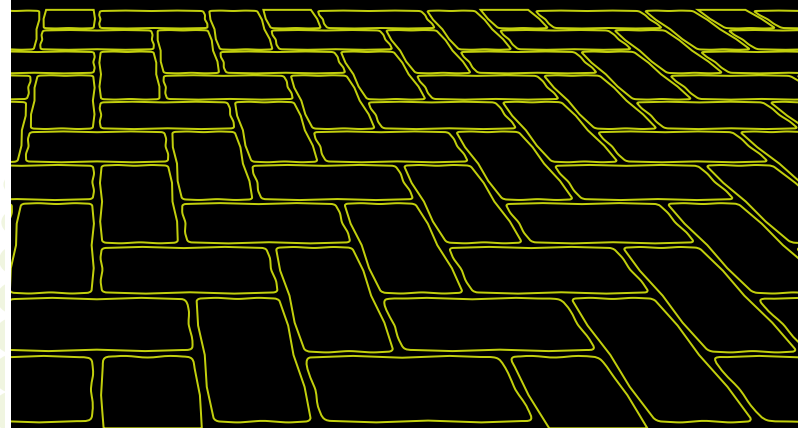



# DRIVE ALIVE

- LESS IMPACT ON THE ENVIRONMENT
- WATER BASED PRODUCTS
- FOR A FRACTION OF THE COST YOUR DRIVE COULD LOOK AS GOOD AS NEW
- QUICK AND EASY APPLICATION

COLOUR GUIDE & ICON KEY - P. 198-199

## OIL STAIN REMOVER

An oil ingesting solution for removing unsightly oil and grease stains from tarmac and concrete. Simply pour, allow to dry and brush away. VOC-free formulation. Bio-degradable.



**APPLICATION:** Excellent for oil and grease lifting from porous surfaces, such as pavements, slabs, drives, pathways and patios. Great for oil leaks from cars or grease spots from bar-b-ques. Simply pour on stain, leave to dry and then sweep up residue.

### PRODUCT SPEC:

**Coverage:** approx 1m<sup>2</sup>/L



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDOSR1 | ○ WH   | 1L   | 12  | 5060021367297 |

## ORGANIC CLEANER

Used as part of the Drive Alive System a powerful, cleaning agent which removes all types of moulds, algae and lichens. One step application!



- Powerful cleaning agent.
- Eradicate lichen and algae safely.
- No preparation - no scrubbing!

**APPLICATION:** Apply using either a soft broom, spray, paint brush or watering can. Apply evenly to the surface to be treated. Lichen eradication will begin as product dries. Leave for a few days to reach full strength. After the growth has died away brush away any residue with a stiff brush.

### PRODUCT SPEC:

**Coverage:** approx 60m<sup>2</sup>/2.5L



| CODE  | COLOUR | SIZE | QTY | BARCODE       |
|-------|--------|------|-----|---------------|
| BDOC2 | ⊗ CL   | 2.5L | 12  | 5060021367303 |

**HSE APPROVED: NO 9829**

# COLOUR ENHANCER



Designed to enhance coloured concrete and block paving and protect from water penetration, oil or grease spillages and dirt/grime build-up. Will enhance present colour and extend the lifespan of the treated surface. A ready-to-use, coloured solution for use on concrete, block paving, paving slabs, walling and roof tiles.

- Restores colour.
- Reduces water penetration, staining and dirt/grime build-up.
- UV stable formulation.
- Helps inhibit organic growth.
- Solvent-free.

## BENEFITS:

- Solvent-free formulation - low odour.
- Facilitates easier cleaning.
- Improves water resistance and UV resistance.
- Contains fungicide which retards mould growth.

## APPLICATION:

Ready-to-use, does not require diluting. Apply using a brush or lambswool roller. Only to be used in conjunction with other Bond It Drive Alive products.



## PRODUCT SPEC:

Coverage: approx 40-60m<sup>2</sup>/4L



| CODE   | COLOUR  | SIZE | QTY | BARCODE       |
|--------|---------|------|-----|---------------|
| BDCBR4 | BRINDLE | 4L   | 1   | 5060021367075 |
| BDCBU4 | BU      | 4L   | 1   | 5060021367051 |
| BDCER4 | R       | 4L   | 1   | 5060021367068 |
| BDCGR4 | CH      | 4L   | 1   | 5060021367020 |

# CLEAR COAT BLOCK SEALER



A ready-to-use, clear sealant for block paving, paths and drive ways. Protects from water penetration, staining and dirt/grime build-up.

- Advanced "Hybrid" technology.
- Ready-to-use.
- Excellent abrasion and chemical resistance.
- Inhibits organic growth.
- Solvent-free.

## BENEFITS:

- Solvent-free formulation - low odour.
- Facilitates easier cleaning.
- Improves water resistance and UV resistance.
- Contains fungicide which retards mould growth.

## APPLICATION:

Ready-to-use, does not require diluting. Stir thoroughly before using and ensure the surface is completely dry prior to application. Apply using a brush, roller or squeegee, ensuring that no pooling or ponding occurs. Cold or humid conditions will slow drying times. Only to be used in conjunction with other Bond It Drive Alive products.



## PRODUCT SPEC:

Coverage: approx 40-60m<sup>2</sup>/4L



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDCBS4 | CL     | 4L   | 1   | 5060021368300 |

# TARMAC RESTORER



A ready-to-use, black, water-based coating for tarmac drives and pathways, designed to restore colour, reduce water penetration, and protect from dirt/grime build-up.

## BENEFITS:

- Restores tarmac colour.
- Helps protect from water damage.
- Reduces dirt/grime build-up.
- Inhibits organic growth.
- Solvent-free.

## APPLICATION:

Ready-to-use, does not require diluting. Stir thoroughly before using and ensure the surface is completely dry prior to application. Apply using a brush, roller or squeegee, ensuring that no pooling or ponding occurs. Only to be used in conjunction with other Bond It Drive Alive products.



## PRODUCT SPEC:

Coverage: approx 16-24m<sup>2</sup>/4L



| CODE  | COLOUR | SIZE | QTY | BARCODE       |
|-------|--------|------|-----|---------------|
| BDTR4 | ● BL   | 4L   | 1   | 5060021368294 |

# INSTANT POT HOLE REPAIRER



A cold lay asphalt concrete pot hole repair compound.

## BENEFITS:

- Simple to use on drives and paths.
- No water or mixing required.
- Use in wet, freezing and hot conditions.
- Instant trafficking.
- Compatible with flexible road surfaces.
- Solvent-free.
- High skid resistance.
- Zero Waste.

## APPLICATION:

A specifically designed solution for roads, pavements and car parks. The product can be trafficked instantly in wet, freezing and hot conditions and at the same time is compatible with the existing road surface. Can be applied at depths of up to 100mm. (Greater depths can be achieved by applying the layer-on-layer method). Contains bitumen. Approximate coverage 1m<sup>2</sup> (compacted).

## PRODUCT SPEC:

Coverage: approx 1m<sup>2</sup> x 15mm (compacted)



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDPHR25 | ● BL   | 25KG | 1   | 5060021369093 |

**DID YOU KNOW...** COLOUR, SEAL OR RESTORE TIRED CONCRETE PATHS, DRIVEWAYS AND PAVED AREAS WITH BOND IT DRIVE ALIVE. QUICK, SIMPLE AND EASY TO APPLY - REVIVE YOUR DRIVE.




# WIDE GAP ALL-WEATHER JOINT-FILL PAVING COMPOUND



A single component joint filling system for the simple and rapid pointing of paved areas with joints over 5mm. Ready-to-use, simple brush application. A unique blend of polymers and aggregates that bind together chemically. On exposure to the atmosphere Joint-Fill forms a stable, solid, mass that is unaffected by the weather once cured. Remains permeable and allows rain water to pass into water course reducing puddling. Eliminates the need for sand/cement pointing!

## APPLICATION:

For pointing paving with joints 5mm+. Suitable for domestic and commercial installations, inside and out. Also compatible with most types of paving including natural stone, terracotta, clay, concrete and cobble stones. It is cost-effective, eco-friendly and safe to use. Suitable installations: Patios, Piazzas, Shopping Centres, Car Parks, Pathways, etc. Not suitable for "v" shaped joints. Simply brush the contents into the joints and leave to set.

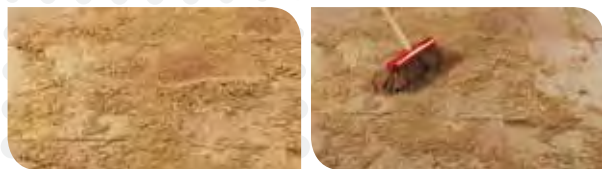

## PRODUCT SPEC:

Coverage: see data sheet



| CODE      | COLOUR | SIZE | QTY | BARCODE       |
|-----------|--------|------|-----|---------------|
| BDJC15    | BU     | 15KG | 1   | 5060021364845 |
| BDJC15GR  | GR     | 12KG | 1   | 5060021367099 |
| BDJC10ANT | ANT    | 10KG | 1   | 5060021369925 |

# PATIOSEAL

A premium grade, solution designed to protect blocks, patios and sand joints from water penetration, oil/petrol grease spillages and dirt and grime build-up. For enhancing the present colour and greatly extending the lifespan of block paving driveways or paths and patios.



**APPLICATION:** This product is ready-to-use. Shake well before use. Ensure a dry surface and apply using a brush, roller or squeegee, ensuring no ponding occurs. Single coat application. Do not apply to wet surfaces, in conditions of high humidity or when rain is imminent. (Protect from rain until fully dry.)

## PRODUCT SPEC:

Coverage: approx 10-15m<sup>2</sup>/L



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH061 | WH     | 5L   | 4   | 5060021363954 |
| BDH063 | WH     | 25L  | 1   | 5060021364920 |



**PROUD TO BE THE OFFICIAL  
MAIN SPONSOR OF THE  
HUDDERSFIELD GIANTS**

## DECKING CLEANER

A specially formulated cleaner to revive weathered and tired hardwood and softwood timber decking. Removes dirt and natural deposits from decking, restoring the wood back to its natural appearance. Should be used prior to treating decking boards with stains and oils as it provides a good key and long lasting finish.

- Fast acting formula.
- Revives weathered decking.
- Removes organic growth.
- Prepares decking prior to surface treatments.
- Suitable for hardwood and softwood deck boards.



**APPLICATION:** Pour directly onto the deck surface and scrub the surface immediately using a stiff brush then leave for 15-20 minutes.

### PRODUCT SPEC:

**Coverage:** approx 20m<sup>2</sup>/5L



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDDCL5 | CL     | 5L   | 4   | 5060021369796 |

## DECKING OIL

A ready-to-use nourishing oil that feeds wood and restores the natural oils lost through weathering. Provides a protective barrier against water penetration where constant weathering can cause swelling and warping. For use on untreated, previously oiled or weathered decking.



- Nourishes wood replacing natural oils.
- Resistant to UV light.
- Prevents mould and algae build-up.
- Waterproofs preventing water ingress.
- Leaves a natural looking finish.
- For all types of garden decking.

**APPLICATION:** Apply using a good quality brush or roller. 2 coat application recommended.

### PRODUCT SPEC:

**Coverage:** approx 20m<sup>2</sup>/5L (2 coats)



| CODE   | COLOUR  | SIZE | QTY | BARCODE       |
|--------|---------|------|-----|---------------|
| BDDOC2 | NATURAL | 2.5L | 2   | 5060021369789 |
| BDDOC5 | NATURAL | 5L   | 4   | 5060021369772 |

## WEED STOP MEMBRANE



Designed as a porous, breathable, cost-effective, weed control membrane. Keeps ground moist and protects from extreme temperatures. Reduces need for watering and lets water and nutrients permeate whilst suppressing weed growth. 5 Year Guarantee.

**APPLICATION:** Ideal for borders, flower beds and lining planters. **Note:** Not suitable for use under driveways or gravel paths.

**PRODUCT SPEC:** SIZE: 1 X 15M; 2 X 25M



| CODE    | COLOUR | SIZE     | QTY | BARCODE       |
|---------|--------|----------|-----|---------------|
| BDWBM15 | BL     | 1M X 15M | 10  | 5060021369024 |
| BDWBM25 | BL     | 2M X 25M | 10  | 5060021369031 |

## LANDSCAPE MEMBRANE



Designed as a porous, heavy duty, breathable, weed suppressant membrane. UV stable, 70g membrane, which is highly resistant to puncturing and tearing. Allows water and nutrients to penetrate whilst suppressing weed growth. 15 Year Guarantee.

**APPLICATION:** Ideal for gravel paths, bark chippings and decking.

**PRODUCT SPEC:** SIZE: 1 X 14M



| CODE   | COLOUR    | SIZE     | QTY | BARCODE       |
|--------|-----------|----------|-----|---------------|
| BDLM14 | DARK GREY | 1M X 14M | 10  | 5060021369086 |

## DRIVE ALIVE MEMBRANE



Top quality membrane. Designed as a highly porous, ground stabilisation membrane. A UV stable, 100g, polyester non-woven material, which has excellent puncture and tear resistance. Bonded fibre design provides superb drainage properties. 15 Year Guarantee.

**APPLICATION:** Ideal for gravel paths, patio and drive ways. Ideal base for block drive ways.

**PRODUCT SPEC:** SIZE: 1M X 14M, 1.8M X 25M, 1.8M X 50M



| CODE    | COLOUR | SIZE       | QTY | BARCODE       |
|---------|--------|------------|-----|---------------|
| BDDAM14 | GR     | 1M X 14M   | 10  | 5060021369055 |
| BDDAM25 | GR     | 1.8M X 25M | 10  | 5060021369062 |
| BDDAM50 | GR     | 1.8M X 50M | 10  | 5060021369079 |

Quick Grab

# GRIPBOND

NON-SLUMPING, MULTI-PURPOSE, GAP-FILLING ADHESIVE.



# FOR TRADE AND DIY USE

**QUICK GRAB  
INSTANT BONDING**

**bond it**



**bond it**

## BITUBOND

A COMPLETE RANGE OF HIGH QUALITY BITUMEN  
COMPOUNDS, COATINGS, PAINTS AND PRIMERS  
FOR EXTERIOR ROOFING APPLICATIONS.





# BITUBOND

- HIGH PERFORMANCE BITUMEN BASED SOLUTIONS
- EASY APPLICATION METHODS
- SUITABLE FOR ALL TYPES OF ROOFING MATERIALS



COLOUR GUIDE & ICON KEY - P. 198-199

## ALL WEATHER ROOFING COMPOUND

A general purpose, waterproof coating for all common roofing surfaces including mastic asphalt, roofing felt, corrugated iron, fibre/cement, slates, lead, copper, tin and zinc. Excellent adhesion to damp surfaces, resistance to extremes of temperature and does not crack in the cold or flow in the sun. Recommended where the threat of frost or rain precludes the use of an emulsion. Can be overcoated with a suitable decorative solar reflective paint to prolong the life of the coating.

### APPLICATION:

Broom or brush.

### PRODUCT SPEC:



Coverage: approx. 1.4m<sup>2</sup>/L



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BD8026 | ● BL   | 2.5L | 6   | 5060021360953 |
| BD8027 | ● BL   | 5L   | 4   | 5060021360960 |
| BD8028 | ● BL   | 25L  | 1   | 5060021360977 |

## ALUMINIUM SOLAR REFLECTIVE PAINT

A light/heat reflective coating that will provide protection against solar degradation and heat gain. It is suitable for use over bituminous coatings, aged asphalt and primed steel. It is a superior alternative to chippings when applied in a two coat application. Reduces heat build-up and gives a reflective finish to bituminous coatings and primed steel. Suitable for the refurbishment of aged steel roofs.

### APPLICATION:

Brush or mohair roller.

### PRODUCT SPEC:



Coverage: approx. 1.4m<sup>2</sup>/L



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BD8030 | SILVER | 2.5L | 6   | 5060021367914 |
| BD8021 | SILVER | 5L   | 4   | 5060021362117 |
| BD8022 | SILVER | 25L  | 1   | 5060021362384 |

## BITUMEN PRIMER

A quality grade, highly penetrative, bituminous solution for priming surfaces prior to the application of bituminous materials and flashing tapes. Heavy duty formula making it suitable to prime concrete roofs and floors, cementitious screeds/renders, bitumen felt, weathered bitumen, mastic asphalt, weathered, corrugated iron and steel.

### APPLICATION:

Brush, squeegee or spray.

### PRODUCT SPEC:



Coverage: approx. 4-8m<sup>2</sup>/L

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDB034 | ● BL   | 1L   | 6   | 5060021363626 |
| BDB019 | ● BL   | 2.5L | 6   | 5060021362360 |
| BDB020 | ● BL   | 5L   | 4   | 5060021362377 |
| BDB029 | ● BL   | 25L  | 1   | 5060021363602 |

## BITUMEN PAINT

A solvent-borne, bituminous black paint for the waterproofing and weather protecting of steelwork and concrete. Used for the protection of ferrous and non-ferrous metals, concrete roofing, felt, fibre cement, corrugated iron, asphalt and wood, against water. Surfaces to be painted must be completely dry and clear of loose material and any corroded areas primed prior to application. Suitable for drinking water tanks as it forms an odourless and taint-free bitumen film coating.

### APPLICATION:

Brush or spray.

### PRODUCT SPEC:



Coverage: approx 4-6m<sup>2</sup>/L

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDB015 | ● BL   | 1L   | 6   | 5060021360908 |
| BDB016 | ● BL   | 2.5L | 6   | 5060021360915 |
| BDB017 | ● BL   | 5L   | 4   | 5060021360922 |
| BDB018 | ● BL   | 25L  | 1   | 5060021360939 |

## CHIPPING SOLUTION

A ready-to-use, premium grade, cold-applied bitumen solution for bonding chippings to roofs that are flat or of low pitch up to a maximum of 1 in 8 fall. Has immediate resistance to rainfall and provides protection from sunlight. Can be used with chippings such as flint, gravel, limestone, granite and white calcined spar. Weatherproof finish with F.A.A rating for ignition, penetration and spread of flames.

### APPLICATION:

Broom or brush.

### PRODUCT SPEC:



Coverage: approx 0.25-0.5m<sup>2</sup>/L

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDB023 | ● BL   | 5L   | 4   | 5060021362674 |
| BDB024 | ● BL   | 25L  | 1   | 5060021362698 |

**DID YOU KNOW...** FOR EMERGENCY ROOF REPAIRS SEE OUR SEALACRYL PRODUCT PAGE 136. FOR INSTANT WATERPROOFING PROTECTION. CAN EVEN BE USED IN THE WET!

## FELT ADHESIVE

A cold applied, solvent-borne, heavy duty adhesive for bonding all types of bituminous roofing felts to asphalt, felt, metal and concrete. It can also be used for bonding mineral chippings to bituminous surfaces. **Note:** It may not be used over tar based products.

### APPLICATION:

Brush, mop or squeegee.

### PRODUCT SPEC:



Coverage: approx 1-1.6m<sup>2</sup>/L dependant on application.

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDB000 | ● BL   | 1L   | 6   | 5060021367891 |
| BDB001 | ● BL   | 2.5L | 6   | 5060021360823 |
| BDB002 | ● BL   | 5L   | 4   | 5060021360830 |
| BDB003 | ● BL   | 25L  | 1   | 5060021360847 |

## TROWEL MASTIC

A multi-purpose, trowel grade material for waterproofing, stopping, bedding, pointing and sealing. Can be applied to most common roofing surfaces including mastic asphalt, roofing felt, corrugated iron, cast iron, fibre/cement, slates, lead, copper, zinc, concrete and timber. Fibre reinforced making it ideal for filling cracks and holes and cures to give a strong and flexible compound.

### APPLICATION:

Steel trowel or putty knife.

### PRODUCT SPEC:



Coverage: approx 0.33m<sup>2</sup>/L

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDB011 | ● BL   | 1L   | 6   | 5060021362124 |
| BDB012 | ● BL   | 2.5L | 6   | 5060021360892 |
| BDB013 | ● BL   | 5L   | 4   | 5060021362131 |



## RUBBER BITUMEN EMULSION

A solvent-free, rubberised bitumen emulsion which dries to a tough, black coating providing a highly effective cold-applied, damp-proof membrane in sandwich constructions. It can also be used as a waterproofer for floors, walls and other above ground structures and acts as a curing membrane when applied to green concrete. It is equally effective as an adhesive for wood blocks, wood mosaic panels, insulation boards, expanded polystyrene and cork panels, or as a plaster bonding agent on difficult surfaces. It can also be applied to damp surfaces. Resistant to extreme heat and cold and has a low odour.

### APPLICATION:

Brush or broom.

### PRODUCT SPEC:



Coverage: approx 2m<sup>2</sup>/L

| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDB008 | ● BL   | 2.5L | 6   | 5060021360861 |
| BDB009 | ● BL   | 5L   | 4   | 5060021360878 |
| BDB010 | ● BL   | 25L  | 1   | 5060021360885 |



**bond it**

# DON'T CRACK-UP

## USE ROOF-MATE ROOF & GUTTER SEALANT

SEE PAGE 12  
FOR FULL  
TECHNICAL  
SPECIFICATION

## SUITABLE FOR SEALING JOINTS ON DOWNPIPES, GUTTERS AND FASCIAS AS WELL AS SEALING GAPS IN MOST ROOFING MATERIAL.





# FLASHING TAPES

## SELF-ADHESIVE FLASHING TAPE FOR GENERAL REPAIRS AND SEALING.



Crease resistant, lead coloured, self-adhesive flashing tape for general repairs and sealing. Designed for use as flashing on flat and pitched roofs, on parapets and chimney stacks. It is also ideal for sealing around RSJ's, flues, concrete columns, roof-lights, guttering and extractor vents. The strength of the facing gives resistance to puncturing and the bitumen gives flexibility and adhesion but without the problems of slump.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE               | QTY | BOX BARCODE   |
|--------|--------|--------------------|-----|---------------|
| BDF001 | GR     | 10M LENGTH X 50MM  | 12  | 5060021360984 |
| BDF002 | GR     | 10M LENGTH X 75MM  | 8   | 5060021360991 |
| BDF003 | GR     | 10M LENGTH X 100MM | 6   | 5060021361004 |
| BDF004 | GR     | 10M LENGTH X 150MM | 4   | 5060021361011 |
| BDF005 | GR     | 10M LENGTH X 225MM | 2   | 5060021361028 |
| BDF006 | GR     | 10M LENGTH X 300MM | 2   | 5060021361035 |
| BDF007 | GR     | 10M LENGTH X 450MM | 1   | 5060021367648 |
| BDF008 | GR     | 10M LENGTH X 600MM | 1   | 5060021367655 |
| BDF009 | GR     | 3M LENGTH X 100MM  | 6   | 5060021361738 |
| BDF010 | GR     | 3M LENGTH X 150MM  | 4   | 5060021361745 |
| BDF011 | GR     | 3M LENGTH X 225MM  | 2   | 5060021361752 |

3M SIZE ALSO CONTAINS A TIN OF PRIMER FOR APPLICATION.

SEE OUR FLASH-MATE LEAD SEALANT FOR JOINTING APPLICATIONS ON ROOFS

## DAMP PROOF COURSES

- Cost effective damp-proof course for domestic construction.
- Embossed to assist mortar adhesion.
- Durable with proven performance over many years.
- Manufactured from the highest quality reprocessed materials.
- Remains flexible - even at low temperatures.
- Safe and clean to handle.
- Suitable for use in horizontal and vertical applications throughout domestic construction.
- Conforms to the requirements of EN14909.



### PRODUCT SPEC:



| CODE   | COLOUR | SIZE        | COVERAGE           | QTY | BARCODE       |
|--------|--------|-------------|--------------------|-----|---------------|
| DPC100 | BL     | 100MM X 30M | 36M <sup>2</sup>   | 12  | 5060021367983 |
| DPC150 | BL     | 150MM X 30M | 36M <sup>2</sup>   | 8   | 5060021368003 |
| DPC225 | BL     | 225MM X 30M | 33.75 <sup>2</sup> | 5   | 5060021368010 |
| DPC300 | BL     | 300MM X 30M | 36M <sup>2</sup>   | 4   | 5060021368027 |
| DPC450 | BL     | 450MM X 30M | 27M <sup>2</sup>   | 2   | 5060021368041 |
| DPC600 | BL     | 600MM X 30M | 36M <sup>2</sup>   | 2   | 5060021368058 |

## BITUBOND 100 TANKING MEMBRANE

A self-adhesive, cold applied, flexible waterproof membrane. One side is covered in bitumen and one side is covered in a high density 2-ply, cross laminated polythene film. The underside is protected by a release sheet which is removed prior to the bonding of the material.



**APPLICATION:** Designed for use in tanking ground structures, parking and plaza decks, subways and retaining walls. Remove the protective release sheet. Apply the membrane, bitumen side down, to the prepared surface. Press down firmly, working from the centre to the edges to expel air pockets. Membrane should be overlapped to ensure a good seal; overlap should be a minimum of 75mm at the edges and 100mm at roll ends and should be firmly rolled with a hand held pressure roller.

### PRODUCT SPEC:

SIZE: 15M X 1M

| CODE   | COLOUR | SIZE     | QTY | BARCODE       |
|--------|--------|----------|-----|---------------|
| BDB100 | BL     | 15M X 1M | 1   | 5060021367884 |

# SEALACRYL

## PROVIDES WATERPROOF PROTECTION

A one component, UV stable, solvent-based, multi-purpose roof coating membrane. Designed to prevent the ingress of water whilst allowing any trapped moisture to escape and evaporate naturally. Manufactured with fibre reinforcement pre-dispersed in the can for ease of application.

### BENEFITS:

- Excellent adhesion.
- Application in damp weather.
- Instant protection.
- Superb solar reflectivity.
- Reinforced membrane.
- One coat application.
- Seamless.
- Fully flexible.
- Unaffected by temperature.
- Economical.



### APPLICATION:

For renovation of all types of roof structure.

Provides waterproof protection of: flat and pitched roofs, corrugated asbestos, roof lights, flashings, roofing felt, gutters, slate, asphalt, lead, glasshouses, metal and fibreglass. Will also bridge small gaps and cracks. Treat all details first, in areas where excessive movement may occur additional reinforcement can be incorporated into the coating.



SealAcryl can be applied in one coat, but experience has shown that a two coat application ensures a greater uniformity of coating thickness. Do not thin. Apply SealAcryl using either a brush or roller.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| SA16R  | GR     | 1KG  | 12  | 5060021366078 |
| SA56R  | GR     | 5KG  | 4   | 5060021366061 |
| SA206R | GR     | 20KG | 1   | 5060021368348 |
| SA1WH  | WH     | 1KG  | 12  | 5060021371348 |
| SA5WH  | WH     | 5KG  | 4   | 5060021368461 |
| SA20WH | WH     | 20KG | 1   | 5060021368485 |
| SA1BL  | BL     | 1KG  | 12  | 5060021371331 |
| SA5BL  | BL     | 5KG  | 4   | 5060021368454 |
| SA20BL | BL     | 20KG | 1   | 5060021368478 |

## SILICONE ULTRA WATERSEAL

A premium grade, solvent-free silicone waterseal. Provides a micro-porous water-repellent coating for masonry work which, while repelling exterior water, allows the emission of water vapour ensuring the interiors and cavity walls remain dry. Used as a masonry waterproofer suitable for use on brick, stone, concrete and unglazed tiles. It protects the surface against water and frost, providing a micro-porous coating which does not change the aesthetic appearance of a building. A secondary benefit of the product is to repel waterborne dirt and resist fungal growth as well as help reduce heating costs, as energy is not wasted in drying out damp walls.



**APPLICATION:** Brush or non-atomising spray. Shake well before use.

### PRODUCT SPEC:

**Coverage:** approx 3-5m<sup>2</sup>/L



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH120 | CL     | 5L   | 4   | 5060021362711 |

## WATERSEAL

A premium waterseal designed to repel water from exterior masonry work which allows walls to breathe, reducing the risk of damage caused by water and frost. Used as a masonry waterproofer suitable for use on brick, stone and concrete. It protects against water and frost, providing a breathable coating which does not change the physical appearance of a building. A secondary benefit of the product is to repel waterborne dirt and resist fungal growth as well as help reducing heating costs, as energy is not wasted in drying out wet walls. Offers years of protection.



**APPLICATION:** Brush or non-atomising spray.

### PRODUCT SPEC:

**Coverage:** approx 3-5m<sup>2</sup>/L



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDH050 | CL     | 5L   | 4   | 5060021364579 |
| BDH051 | CL     | 25L  | 1   | 5060021367617 |



**bond it**

**Wide Gap Joint-Fill Paving Compound**

**JOINT-FILL  
PAVING COMPOUND**


SINGLE COMPONENT JOINTING  
COMPOUND FOR PAVING,  
FLAGSTONES, COBBLES, ETC.  
WITH JOINTS OVER 5MM

**THE PROFESSIONALS CHOICE**

**bond it**

## PLUMBINGSOLUTIONS

ALL YOUR SANITARY REQUIREMENTS  
OBTAINABLE FROM ONE SOURCE. PROVIDING THE  
BEST LEVEL OF PROTECTION AND MAINTENANCE  
FOR TODAY'S MODERN HEATING SYSTEMS.

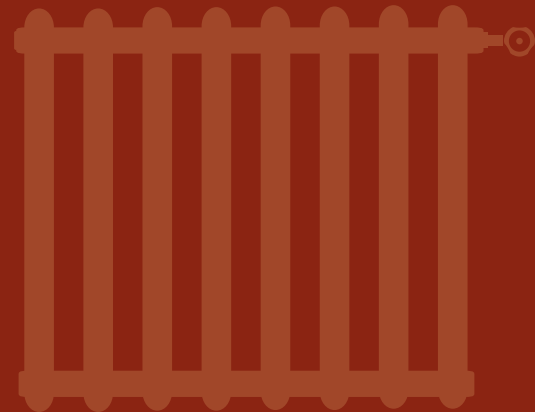



# PLUMBING SOLUTIONS

- PLUMBING PRODUCTS & ACCESSORIES
- EASY TO ADMINISTER
- FOR NEW & EXISTING HEATING SYSTEMS
- OFFERING PROTECTION AND MAINTENANCE SOLUTIONS

COLOUR GUIDE & ICON KEY - P. 198-199

## PC 100 INHIBITOR

High performance inhibitor of scale, rust, corrosion, hydrogen gassing, microbiological growth and boiler noise. Suitable for use in all types of indirect systems, including aluminium based. Once added, PC 100 never needs to be replaced unless the system is drained down.

- Long lasting protection.  
Will extend the life of the system.
- Non toxic, safe to use, environmentally friendly.
- No staining, colourless formulation.
- Prevents boiler noise and pin-holing.
- Complies with latest EU inspection standards using the special "peel off" label to date the system when product has been added.



### PRODUCT SPEC:

| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDPC100 | ⊗ CL   | 1L   | 10  | 5060021367495 |



## PC 101 BUILD CERT APPROVED INHIBITOR

A build cert approved, high performance inhibitor of scale, rust, corrosion, hydrogen gassing, microbiological growth and boiler noise. Suitable for use in all types of indirect systems, including aluminium based. Once added, PC 101 never needs to be replaced unless the system is drained down.

- Long lasting protection.
- Will extend the life of the system.
- Non toxic, safe to use, environmentally friendly.
- No staining, colourless formulation.
- Prevents boiler noise and pin-holing.
- Complies with latest EU inspection standards using the special "peel off" label to date the system when product has been added.



### PRODUCT SPEC:

| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDPC101 | ⊗ CL   | 1L   | 10  | 5060021368522 |



## PC200 INHIBITOR



Handy sized, concentrated inhibitor for central heating systems. This concentrate provides all the benefits of its conventional liquid counterparts (PC 100/101) with the added benefits of:

- Simple and quick application to open or closed systems via a radiator feed valve or filling loop.
- Ideal in situations where conventional liquid products are difficult to administer.
- 1 tube will treat a typical heating system containing 100L system water.
- No need to bleed radiators before injecting.
- Time and cost effective system.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDPC200 | ⊗ CL   | 300ML | 12  | 5060021367501 |

## PC300 UNICLEAN

Powerful universal cleaner for new central heating systems or those up to 6 months old. Flushes out flux, swarf, insoluble flux residues, jointing pastes and other installation debris and sludge.

- Ideal for use prior to application of PC100/101/200 inhibitors.
- Powerful, heavy duty cleaning agent.
- Eradicates corrosive flux residues, which could cause rapid pin-holing corrosion of radiators.
- Eliminates harmful copper deposits being left in the system.



### PRODUCT SPEC:



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDPC300 | ⊗ CL   | 1L   | 10  | 5060021367488 |

## PC400 FLUSHCHEM

A heavy-duty flushing chemical for cleaning boiler heat exchangers, radiators and pipework in domestic central heating systems.

- Removes corrosion debris and lime scale deposits.
- Stops kettling caused by scale build-up and removes cold zones.
- Can be used with power flushing machine.
- Suitable for use with all metals and alloys including aluminium.
- Can be used on multi-metal systems.
- Totally safe product – non-toxic and non-hazardous.



### PRODUCT SPEC:



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDPC400 | ⊗ CL   | 1L   | 10  | 5060021367471 |

## PC500 RADLEAK

An effective leak sealer for sealing inaccessible leaks and weeping joints in a sealed central heating system.

- Suitable for reducing pressure loss from sealed systems.
- Will not cause pump or air vent blockages.
- Suitable for multi-metal systems, including those containing aluminium.
- Non-hazardous, non-flammable and non-irritant.
- High stability, compatible with elastomers.
- Readily dispersible.



### PRODUCT SPEC:



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDPC500 | ⊗ CL   | 1L   | 10  | 5060021367624 |

## PC600 NOISE BUSTER

A non-acidic boiler descaler which stays in the system for life; no need to flush. Knocking and kettling are usually attributable to hard water and limescale and sludge deposit formation on the heat exchangers surfaces. These deposits reduce heat transfer which increases fuel bills and reduces service life of the boiler.

- Removes scale and baked on sludge deposits, preventing them from re-forming.
- Restores heat efficiency, reduces noise and extends boiler life.
- Compatible with plastic tanks, micro-bore and all multi metal systems, including those containing aluminium.



### PRODUCT SPEC:

| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDFC600 | CL     | 1L   | 10  | 5060021367686 |

## PC700 BONDFLUX - PLUMBERS FLUX

A self-cleaning soldering flux used for capillary joints on copper pipework, brass and mild steel. This product is UK WRAS listed for both hot & cold water including potable water. Being pH neutral at room temperature, it is also suitable for gas pipework.

### APPLICATION:

PC700 Bondflux is used for capillary joints on copper pipework, brass, and mild steel.



### PRODUCT SPEC:

| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDFC700 | WH     | 250G | 10  | 5060021367525 |



**DID YOU KNOW...** SEE BOND IT GB PRO, PAGE 61, FOR SEALING APPLICATIONS. OFFERS SUPERB ADHESION TO ALL SANITARY, BATHROOM, WETROOM, KITCHEN & PLUMBING MATERIALS. IDEAL FOR APPLICATIONS ON TO WET SURFACES OR UNDERWATER.

## PC800 PIPESEAL

A solvent-based cement for sealing uPVC, muPVC and ABD products. Brush applicator for easy use.



### PRODUCT SPEC:

| CODE     | COLOUR | SIZE  | QTY | BARCODE       |
|----------|--------|-------|-----|---------------|
| BDFC8001 | CL     | 125ML | 10  | 5060021369390 |

## PC900 PIPE JOINTING COMPOUND

A non-toxic jointing compound which acts as a lubricant enabling pipe threads to be screwed tight.

- Easy to apply.
- Thick, smoothable paste giving good coverage.
- Suitable for oil, gas, water and steam applications.



### PRODUCT SPEC:

| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDFC900 | CL     | 400G | 10  | 5060021367518 |

## THREADSEAL PTFE TAPE

A non-adhesive plumbers PTFE tape, suitable for use with thread fittings. Conforms to BS6920 and UK WRAS listed.

### APPLICATION:

For thread sealing of plumbing pipe work. Suitable for use with plastic, brass and other metal fittings/ pipes. Ideal for radiator tails and male tapered pipe threads. Tape Density: 0.4g/cm<sup>3</sup>

**Note:** This product is not suitable for use on gas pipes.



### PRODUCT SPEC:

SIZE: 12MM X 0.075MM X 12M

| CODE    | COLOUR | SIZE               | QTY | BARCODE       |
|---------|--------|--------------------|-----|---------------|
| BDFTE12 | WH     | 0.075 X 12MM X 12M | 10  | 5060021369482 |



# RESCUE TAPE

**HAS INFINITE USES!**



## HERE ARE A FEW SUGGESTIONS:

- Keep it on board vehicles & equipment for emergency hose repairs.
- Seal leaky hoses, pipes, tubing & fittings.
- Neaten up lines and extensions cords in stowage.
- Whip the ends of rope.
- Wrap tools and handles for a great non-slip grip.
- Wrap wiring harnesses and custom split-loom.
- Waterproofing electrical connections and terminals.
- Use it as an emergency fan belt or O-Ring.
- Wrap hydraulic fittings and other exposed metal connections to help prevent corrosion.
- Works even over wet, dirty or oily surfaces.
- Works under water.
- Keep a roll of Rescue Tape in all cars, boats and tool boxes for emergencies.
- Wrap it around anything that you want to secure or repair, and it will never leave any sticky residue.

**THE ULTIMATE MULTI-PURPOSE  
REPAIR TAPE!**

**bond it**

## FLOORING RANGE

A COMPREHENSIVE RANGE OF HIGH QUALITY FLOORING PRODUCTS. OFFERING A VARIETY OF SOLVENT-FREE SELF-LEVELLING COMPOUNDS, PRIMERS, SURFACE DPM'S AND FLOORCOVERING ADHESIVES.



# FLOORING RANGE

- SUB-FLOOR PREPARATIONS & TREATMENTS
- FLOORCOVERING ADHESIVES
- GOOD COVERAGE RATES
- CAN BE USED WITH UNDERFLOOR HEATING SYSTEMS

COLOUR GUIDE & ICON KEY - P. 198-199

NEVER COMPROMISE ON QUALITY!

## LX 16 WOOD ADHESIVE

A solvent-based, heavy duty, interior adhesive for bonding all types of wood flooring. Ideal for use where the nature of the wood flooring makes it particularly prone to warping when bonded with a waterborne adhesive. Easy to spread with a high shear strength and short open time.



**APPLICATION:** Suitable for use on parquet flooring, woodblock and wood strip to most common substrates. Can be used with underfloor heating systems. Apply by triangular notched trowel, size as recommended by the wood flooring manufacturer. No waiting time necessary prior to laying wood flooring. **Note:** the correct sub-floor preparation must be conducted prior to laying any flooring systems. Consult our technical department for details.

### PRODUCT SPEC:

**Coverage:** notched trowel TKB B3 approx 2m<sup>2</sup> per litre.



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDLX162 | BR     | 10L  | 1   | 5060021367846 |
| BDLX161 | BR     | 5L   | 1   | 5060021367822 |

## FLOORBOND GPA ADHESIVE

### GENERAL PURPOSE FLOORING ADHESIVE

A light coloured, solvent-free, high tack, synthetic resin emulsion, designed to produce excellent initial grab. The adhesive is low odour, has zero calculated VOC 's and contains anti-microbial protection.



**APPLICATION:** A premium floor covering adhesive recommended for bonding the majority of carpet backings used in heavy commercial applications. It may also be used for bonding rigid and semi flexible vinyl tiles. Please check with technical services for compatible products. It can be applied to most common substrates, including concrete, cementitious screeds, chipboard, hardboard, plywood and smoothing compounds. With care, textile floor coverings can be laid on non-porous surfaces such as asphalt, although it is advisable to apply a minimum 3mm application of a latex based smoothing compound. It is suitable for use where there are underfloor heating systems. However, heating should be switched off at least 48 hours before and after the installation of the floor covering. Refer to technical data sheet for application details.

### PRODUCT SPEC:



| CODE     | COLOUR | SIZE | QTY | BARCODE       |
|----------|--------|------|-----|---------------|
| BDGPA15L | BG     | 15L  | 1   | 5060021369475 |

T: 01422 315300 • F: 01422 315310 • WWW.BOND-IT.CO.UK

## FLOORBOND MPA

### MULTI-PURPOSE FLOORING ADHESIVE

A multi-purpose acrylic adhesive for bonding most vinyls & carpets.

- Solvent-free.
- Non staining.
- Excellent plasticiser migration resistance.
- Suitable over most underfloor heating systems.



### PRODUCT SPEC:

Coverage: 3 - 4.3m<sup>2</sup> per Kg



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDMPA15 | BG     | 15KG | 1   | 5060021368256 |
| BDMPA5  | BG     | 5KG  | 1   | 5060021368263 |

## FLOORBOND PSA

### PRESSURE SENSITIVE ADHESIVE

A pressure sensitive adhesive for use with the majority of vinyl floorcovering & PVC backed carpets.

- Pressure sensitive acrylic.
- Solvent-free.
- Non staining.
- Excellent plasticiser migration resistance.
- High coverage.
- Suitable over most underfloor heating systems.



### PRODUCT SPEC:

Coverage: 3.5 - 7.6m<sup>2</sup> per Kg



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDPSA15 | C      | 15KG | 1   | 5060021368249 |

**DID YOU KNOW...** SEE OUR RANGE OF LEVELLING COMPOUNDS ON PAGES 92-94 FOR SMOOTHING AND LEVELLING INTERNAL SUB-FLOORS PRIOR TO FLOORCOVERING APPLICATIONS.

# RESIPRIME DPM

## MOISTURE CURING RESIN PRIMER

A ready-to-use, 1-part, solvent-free, moisture curing, resin primer and damp-proof membrane for the treatment of cement based sub-floors and substrates. Quick cure within 60 minutes.

### BENEFITS

- 1-part, ready-to-use, no mixing required.
- Rapid drying (approx 45 mins @ 50% RH @ 20°C).
- Can be used over old adhesive residue.
- Suitable for use with underfloor heating.
- Solvent-Free - no VOCs.

Suitable for priming and sealing absorbent and non-absorbent sub-floors, consolidating weak cement screeds and isolating old adhesive residues prior to parquet/wood adhesive application. Suitable as a damp-proof membrane over underfloor heating systems and on sub-floors not subject to hydrostatic pressure. Can be used over underfloor heating (max 3% moisture CM Method, 4.5% Tramex).

See technical data sheet for full specification and application details.



**APPLICATION:** Apply using a roller, paint brush or squeegee for best results.

### PRODUCT SPEC:



| CODE   | COLOUR | SIZE | QTY | BARCODE       |
|--------|--------|------|-----|---------------|
| BDRES5 | STRAW  | 5L   | 4   | 5060021371324 |



# FLOORBOND CTT

## CARPET TILE TACKIFIER

A solvent-free acrylic emulsion providing a permanently tacky film for the removable fixing of "loose lay" carpet tiles. Enables tiles to be easily lifted and replaced when required. Non-staining, resistant to plasticiser migration and may be applied by either roller or brush. Recommended for installing carpet tiles with the following backing: PVC, PVC/Glass Fibre, Bitumen/Felt or non-woven fabric, APP and other polymer backings including polyurethane, and Hessian.

**APPLICATION:** Can be applied to most common substrates, including concrete, cementitious screeds, chipboard, hardboard, plywood and smoothing compounds and metal access floor panels. It may be used over existing well bonded resilient floor coverings provided they are thoroughly cleaned of any wax, polish or other contaminants.



### PRODUCT SPEC:

Coverage: 6 - 7m<sup>2</sup> per Kg



| CODE    | COLOUR | SIZE | QTY | BARCODE       |
|---------|--------|------|-----|---------------|
| BDCCT25 | WH     | 25KG | 1   | 5060021368270 |
| BDCCT5  | WH     | 5KG  | 4   | 5060021368287 |

# TS55 WOOD ADHESIVE

## A UNIVERSAL FLEXIBLE WOOD FLOOR ADHESIVE RANGE



A permanently flexible, one part, ready to use, moisture cure, internal wood flooring adhesive. Free from silicone, solvent, isocyanates and water. Based on Hybrid Polymer Technology; the TS range reduces the risk of warping or deforming the wood flooring due to its moisture and solvent-free composition.

### PRODUCT CHARACTERISTICS:

- Solvent and moisture-free.
- Permanently elastic.
- Based on hybrid polymer technology.
- Suitable for use with parquet, mosaic, oak, wood block and laminated exotic timber and many other wood types.
- Can be used with underfloor heating systems.
- Reduces risk of warping and deforming.
- Quick cure and rapid bond strength.
- Excellent gap-filling properties.
- Acoustic properties.
- Special nozzle to extrude triangular shaped bead in cartridge format.

**APPLICATION:** For the internal bonding of parquet, mosaic, oak, wood block, laminated, exotic timber and many other wood floor types to porous or non-porous substrates including; screeds, chipboard, plywood, concrete and anhydrite. Also compatible with substrates incorporating underfloor heating systems. Now available in 310ml cartridge and 600ml sausage versions.

### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDS55   | BG     | 10L   | 1   | 5060021368973 |
| BDS55*  | BG     | EU3   | 12  | 5060021369277 |
| BDS556* | BG     | 600ML | 12  | 5060021369345 |

\* SAUSAGE GUN AND SKELETON GUNS ALSO AVAILABLE SEE PAGES 40-41.

## PU WOOD GLUE

One-part moisture cure polyurethane adhesives.

- **GEL FORMULATION:** A solvent-free, rapid setting, thixotropic, translucent PU gel which sets in 5 minutes.
- **LIQUID FORMULATION:** A solvent-free, rapid setting, brown, liquid PU adhesive which sets in 30 minutes.

Conforms to BS EN204 (Class D4 - strength).

### APPLICATION:

Excellent bonding properties suitable for all wood products including floor gripper, skirting boards, staircases, and insulation materials to most common substrates. Suitable for interior and exterior applications.



### PRODUCT SPEC:



| CODE   | COLOUR | SIZE  | QTY | BARCODE       |
|--------|--------|-------|-----|---------------|
| BDAPU5 | ⊗ T    | 300ML | 12  | 5060021363398 |

LIQUID FORMULATION ALSO AVAILABLE. SEE PAGE 63 FOR DETAILS.

## CONTACT ADHESIVE

A premium grade, solvent-based, neoprene adhesive with high grab and long open time to enable repositioning. 250ml, 500ml and 1L versions are toluene-free.

**APPLICATION:** Can be used for bonding cork, leather, rubber, metals, wood, chipboard, hardboard, laminated plastics (e.g. Formica), dense textiles, plaster, stone concrete and smoothing compounds. It will bond rigid PVC and PVCu sheets but the materials should be checked for suitability prior to application as plasticiser migration can occur in some instances. **Note:** This product is not suitable for polystyrene, polythene, polypropylene, silicone rubbers, bitumen or PTFE. The solvent in the contact adhesive may attack certain painted or lacquered surfaces.



### PRODUCT SPEC:



| CODE    | COLOUR | SIZE  | QTY | BARCODE       |
|---------|--------|-------|-----|---------------|
| BDA004  | ⦿ BG   | 250ML | 12  | 5060021369352 |
| BDA001  | ⦿ BG   | 500ML | 12  | 5060021360588 |
| BDA002  | ⦿ BG   | 1L    | 12  | 5060021360595 |
| BDA003L | ⦿ BG   | 5L    | 1   | 5060021368201 |

**bond it**

# RESCUE & REPAIR

INFINITE USES.

DEVELOPED IN CONJUNCTION WITH US ARMED FORCES.


THE ORIGINAL RESCUE TAPE - DON'T BE FOOLED BY  
CHEAP IMITATIONS!

NEVER COMPROMISE ON QUALITY!

## INNOVATIVE PRODUCTS

# Silicone **bond it** RESCUE TAPE

THE ULTIMATE MULTI-PURPOSE REPAIR TAPE!

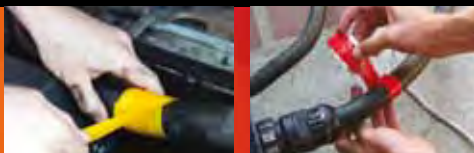

- Building industry
- Automotive industry
- Agricultural industry
- Electrical
- Plumbing
- Marine
- Caravans
- Aircraft
- Military



Starter kits  
available –  
ring 01422  
315300



Resists fuels, oil, acids, solvents,  
salt water, road salt, UV rays

ENDLESS USES FOR EITHER PERMANENT OR  
TEMPORARY REPAIRS FOR MOST MATERIALS!

# RESCUE TAPE

A self-fusing, silicone repair product with infinite uses. Resists fuels, oil, acids, solvents, salt water, road salt and UV rays. For repairing leaks on plumbing and hoses in a flash. It can be used to insulate electrical wiring and it can withstand a constant working temperature of 200°C. Simply stretch and wrap for a permanent seal.

## PROPERTIES:

- Pressure resistant up to 8 Bar.
- Insulates 8,000 volts.
- Waterproof - airtight.
- Can be applied under water.
- Never gets gummy or sticky.
- Resists extremes of temperature:  
-50°C to +260°C.



## APPLICATION:

Suitable for emergency hose repair, pipe and plumbing repair, electrical insulation, wiring harnesses, corrosion protection, sealing connections & fittings, waterproofing, rigging applications, whipping rope ends, emergency O-rings and seals, tool handles and grips and much more! Merchandise available: countertop dispenser, clip strips, dvd, posters and flyers.



## PRODUCT SPEC:

SIZES: 2.54CM X 3.66M X 0.5MM

| CODE   | COLOUR | SIZE         | QTY | BARCODE       |
|--------|--------|--------------|-----|---------------|
| BDRTBL | ● BL   | 25MM X 3.66M | 12  | 5060021369130 |
| BDRTCL | ⊗ CL   | 25MM X 3.66M | 12  | 5060021369147 |
| BDRTWH | ○ WH   | 25MM X 3.66M | 12  | 5060021369185 |
| BDRTTR | ● R    | 25MM X 3.66M | 12  | 5060021369154 |
| BDRTBU | ● BU   | 25MM X 3.66M | 12  | 5060021369161 |
| BDRTY  | ● Y    | 25MM X 3.66M | 12  | 5060021369178 |



**bond it**

**Never Compromise on Quality!**

**Bond It specialises in the supply of an extensive range of materials  
to the merchant, DIY, glazing, building, construction & roofing sectors.**



**Adhesives • sealants • building chemicals • bitumen compounds & coatings • tile adhesives & grouts • tapes • guns,  
polyurethane foam • cleaners • flooring compounds • weatherproofing & waterproofing products.**

[www.bond-it.co.uk](http://www.bond-it.co.uk)

**bond it**

## MERCHANDISING

A RANGE OF POINT OF SALE DISPLAY  
ITEMS FOR OUR PRODUCTS.



# MERCHANDISING

- HIGH QUALITY BRANDED DISPLAY PRODUCTS
- ROBUST & EASY TO ASSEMBLE
- INFORMATIVE POS LITERATURE & DVD'S

# MERCHANDISING

TO ENHANCE THE STRIKING LIVELY OF BOND IT PRODUCTS WE ALSO SUPPLY TO OUR CUSTOMERS A VARIETY OF MERCHANDISING ITEMS TO HELP DISPLAY OUR PRODUCT RANGE.

## HIGHEST QUALITY FOR RELIABLE PERFORMANCE

The combination of best quality raw materials, stringent quality control within the manufacturing process and constant product innovation has helped make the Bond It name the professionals' choice for reliability, performance and value.

## COMPREHENSIVE RANGE

The constantly growing Bond It range of adhesives and sealants now encompass premium grade acrylics, specialist silicone sealants, tiling products, bitumen, rubber & PVA adhesives, contact adhesives, building chemicals and complementary products.

## EXCELLENT CUSTOMER SUPPORT

In addition to our customer-focused field and telesales operation, we have a team of experienced technical advisors who can provide recommendations based on an in-depth knowledge of industry requirements.



**ALL PURCHASES ARE SUBJECT TO OUR STANDARD TERMS AND CONDITIONS WHICH ARE AVAILABLE ON REQUEST.**

For detailed specifications on any of our products featured please refer to the relevant technical data sheets and health and safety sheets. These are available upon request from our telesales department or can be down loaded from our website: [www.bond-it.co.uk](http://www.bond-it.co.uk)

# MERCHANDISING

## BOND IT STAND

A robust construction, plastic floor stand with 4 shelves. Complete with 3 plastic trays to support cartridge tubes. Easy Assembly.

Dimensions: H: 1920mm  
(Including Header Card)  
W: 700mm  
D: 500mm  
Code: BDPOS001



## MEGA FOAM STAND


12 tins per shelf x 2 shelves.  
Total stock holding 24 tins.  
Can hold large & small cans in all combinations.

Dimensions: L: 370mm  
W: 370mm  
H: 1350mm  
Code: POSMEGA



## COUNTER DISPLAY

A3 strutted card display board. Complete with leaflet dispenser. Shows applied samples.



## GIST/ GB PRO STAND

Double sided. 12 cartridges per face. Total stock holding 24 cartridges.

Dimensions:  
Length - 590mm  
Depth - 400mm  
Height - 1340mm

Code: POSGBGS



## GIST/ GB PRO AISLE FLAG

Size: 178 x 365mm. Double sided.  
Material: 800mic Polyprop inc. 1 x flag clip.



**FIT TO ANY STANDARD SHOP SHELVING UNITS**



# MERCHANDISING

## DOUBLE SIDED FIXTURE HEADER

Size: 995 x 460mm - inc 2 x holes for hanging option.  
Material: 2000mic display board.  
For use on gondolas, walls or suspended from ceilings.




## FLOOR GRAPHIC

Size: 995 x 348mm  
Material: Vinyl with Floor Lam Self adhesive, non slip.




## NAVIGATIONAL FOOTPRINT

Size: 140 x 350mm.  
Material: Vinyl with Floor Lam.  
Self Adhesive.

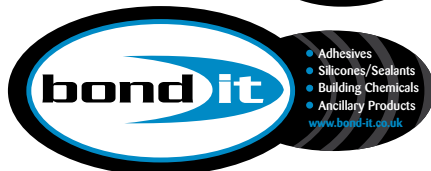

## WINDOW STICKERS

Self adhesive A5 window / door stickers for stockists.

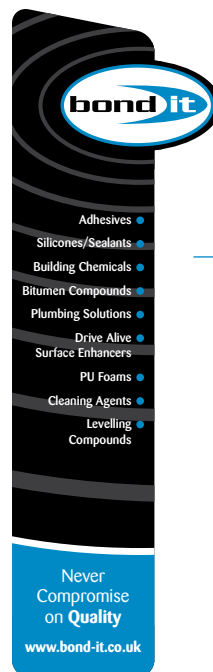

## DOUBLE SIDED FIXTURE FLAG

Size: 282 x 900mm.  
Material: 1000mic polyprop inc.  
2 x clips per flag.  
Fits on to standard shop shelving units.



## CARTRIDGE STRIPS

PVC strips for hanging silicone / adhesive cartridges. Holds 6 cartridges; simply push the tube into the slots and hang them on racking, shelving, fixtures and fittings. Allows products to be displayed in multiple locations.

## SHELF STRIPS

Bond It printed shelf strips for standard shop shelving. Has self adhesive backing so can either be adhered to or simply slid behind plastic epos strips.



# MERCHANDISING

## SNIP-OFF



Handy and safe cartridge cutter. Cuts threads and nozzles in one easy action.

## PEN KNIFE

Robust construction pen knife with release trigger and changeable blade. (available for purchase, boxed in 50's).



## POS LEAFLETS

Selection of point of sale available detailing product key facts and usages.



## DVD'S

GB Pro and Reload DVD showing benefits and usage of the two cartridge products.

Rescue Tape DVD



## CARTRIDGE TRAYS

Vacuum formed plastic trays which hold standard sealant / adhesive cartridges. Holds 12 tubes. Can be displayed on shelving, counter tops, stands etc. Cartridges won't topple and fall over.



## BANNERS

Bond It stockist banner. 370 gsm PVC with 8 eyelets. Dimensions: 1m wide x 690mm high.



ALSO AVAILABLE JOINT-FILL BANNER AND BOND IT LOGO BANNER. ASK YOUR REP FOR DETAILS.

# STANDARDS

HAVING THE REASSURANCE THAT PRODUCTS BOUGHT ARE MANUFACTURED TO EXPECTED STANDARDS, IS A KEY FACTOR IN THE PURCHASING DECISION. BOND IT CAN GUARANTEE PERFORMANCE OF ALL OUR PRODUCTS TO ALL OUR USERS, WHILST MINIMIZING ENVIRONMENTAL IMPACT.

Bond It achieved UKAS accreditation for its ISO 9001 Quality Management System under certificate number 6152 back in 2007 and ISO 14001 for environmental policy compliance in 2012. This ensures that quality is controlled through careful selection of raw materials and strict enforcement of ISO9001 protocol through all aspects of the manufacturing process. The company continues to review all aspects of Quality Assurance with the objective of providing a first class service to our customer. Stringent control of our manufacturing process guarantees that our products offer unsurpassed quality at affordable prices! We never compromise on quality!

Bond It takes its duty of care to the Environment seriously and is committed to extending the existing Environmental Policy having attained the ISO14001 Standard.

The Bond It website has also been subject to a major overhaul, making all our data and information available at the touch of a button. Technical and material safety data sheets can also be down loaded for reference as well as regular updates on new products and Bond It news items to keep you informed of what we are doing.



Certificate No: 6152  
ISO 9001, ISO 14001

# SILICONES & SEALANTS

## WHAT SEALANT DO I USE??

There are many different sealants available on the market and all are marketed for a variety of different applications. This can be extremely confusing when choosing the right product but the basic differences are generally related to quality of the product, toolability, drying times, flexibility and movement and adhesion properties. So in a nutshell to help you understand sealant technology we have tried to simplify what the manufacturers are talking about:-

The main product types are Silicone, Water-Based, Hybrid and PU; some are more compatible with certain materials than others. Here's an overview with their benefits and limitations to help you make a more informed choice:

## SILICONES

Silicones can generally be split into two groups; Acetoxy Cure (Acetic Acid) and Neutral Cure. All one part silicones cure by moisture present in the air surrounding them. All have different characteristics, some harder or softer than others. Some adhere to certain materials better than others. No silicones are suitable for use with Bitumen, Asphalt or any Tar product and are not over paintable.

## ACETOXY CURE

The most common and generally cheaper option. These smell of vinegar which can be quite pungent. These can be used, without issue, in many applications in conjunction with many materials.

However due to Acetic Acid being evolved during the curing process, Acetoxy silicones do have their limitations. These include:

1. When used with untreated / unprimed metals such as Lead, Copper, Brass, Steel, etc. The acetic acid vapours can oxidise the surface, creating a powdery residue between the bonds and subsequently lead to adhesion failure.
2. When used with any material containing cement such as concrete, plaster, mortar and render. Cement is alkaline, as acetoxy silicones are acidic when curing there is a risk of reaction causing adhesion failure.



# SILICONES&SEALANTS

3. With some plastics, especially with silicones extended with solvents. Testing is always recommended before use. Plastics can be compounded with other unknown materials.

4. Tiles made of natural stone which will react to the acid in the silicone.

## NEUTRAL CURE

Neutral cure silicones generally have better adhesion than acetoxys to most common materials, including plastics. Adhesion promoters are easily added to neutral cure silicones. Being pH neutral whilst curing, these are compatible with metals and substrates containing cement. Fewer odours can be expected when using them.

## NEUTRAL CURE OXIME

Oximes, which have only become prevalent in recent years, give off a chemical called MEKO when curing. There is some evidence that MEKO is carcinogenic (cancer causing). Of late, low MEKO formulations are available with emissions that fall within the permitted exposure limits. These are often extended with solvent and fillers, they possess very good adhesion to the likes of PVCu giving a cost effective product for perimeter sealing in the glazing industry.

## NEUTRAL CURE ALKOXY

Alkoxy silicones offer excellent adhesion without evolving MEKO during the curing process. Can be used in a wide range of applications from glazing and engineering to general construction. Note: 100% neutral cure alkoxy products are the only silicones that can be used for 'bedding in' double glazed units. This is because they are neutral cure and don't contain any solvents that will degrade the insulating glass seals.

## COMMON PHRASES ENCOUNTERED WHEN ASKED FOR SILICONE SEALANTS:

**Modulus:** This is a calculation of stress and strain measurements of the cured sealant. Low modulus dictates a softer and stretchier sealant. High modulus being harder and less elastic.

**RTV:** This phrase has been around for years and is normally associated with acetoxys products for engineering. However, RTV stands for 'Room Temperature

# SILICONES&SEALANTS

Vulcanising', all this means is that it cures at room temperature. Technically, all one part, moisture cure silicones are 'RTV'.

**LMA:** Low Modulus Acetoxys cure.

**HMA:** High Modulus Acetoxys cure.

**LMN:** Low Modulus Neutral cure.

**Elasticity:** Or movement accommodation is the percentage a sealant will expand and contract in use. For example the movement required when installing a door frame would need a higher degree of flexibility than one sealing around a work top. A Low Mod Neutral would have approx 25% movement capability compared to 20% of a High Mod Acetoxys.

## WATER BASED SEALANTS

These are blends of fillers and other materials bound together by a water based polymer emulsion and cure by evaporation. Depending on the polymer used, some are more water resistant than others and can be harder or softer. Drying times can vary substantially depending upon conditions and the water content of the sealant. Unlike silicones which will cure faster in warm humid conditions, water based sealants will dry more slowly. Warm, dry, well ventilated conditions will provide faster drying times.

Water based sealants are over paintable. All have an element of 'flexibility', however 'flexibility' should not be confused with the stretch, elongation or elasticity a silicone sealant will offer. Silicones will generally FAR out perform water based products in all departments when used as sealants. See our Mate Range Sealants on pages 17-19.

## POLYURETHANE SEALANTS

One part moisture cure Polyurethane offers excellent adhesion to most materials, it offers good resistance to chemicals and abrasion when used as a sealant. PU sealants are generally harder than silicones and unlike silicones they are over paintable. PU's are not normally found being used in domestic applications; they are more widely used in Engineering, Automotive, Construction and Marine applications. Being tough and flexible with excellent adhesion to construction materials, PU is ideal for expansion joints. See our PU18 Sealant on page 37.

# SILICONES&SEALANTS

## HYBRID SEALANTS

Hybrid Polymer, sometimes known as MS, sealant technology has only recently arrived on the scene. They are among the most versatile sealants available. They are neutral and cure by moisture to form a tough resilient, permanently flexible seal; resistant to UV, abrasion, salt water, mild solvent and acid, are overpaintable and can be applied in damp conditions. Due to the wide range of materials that Hybrid Sealants will adhere to they are used in a wide range of applications including; Construction, Engineering, Glazing, Marine, Automotive and are becoming more available as an 'All In One' product for general domestic use. See our GB Pro Adhesive and Sealant on page 61.

## UNDERSTANDING EN 15651

In July 2014, a new standard for sealants replaced ISO11600. This new standard identifies sealants for specific environments:

Part 1 Facade Sealant, designated as F.

Part 2 Glazing Sealants, designated as G.

Part 3 Sanitary Sealants, designated as S.

Part 5 Pedestrian walkway Sealants, designated as PW.

Within each of these categories, the sealants are given subcategories some of which are unique to that category. Some multi purpose sealants can carry designations from more than one category.

- EXT - tested for exterior use.
- INT - tested for interior use.
- 20LM or 25LM% movement capability Low Modulus.
- 20HM or 25HM% movement capability High Modulus.
- XS1, XS2, XS3 and S1, S2, S3 microbial resistance, 1 is highest, 3 is lowest.
- CC suitable for use in cold climates.

So for example Gist, which is a low modulus neutral cure silicone conforms to all 4 parts of EN15651 and is designated as F EXT-INT, G 25LM, XS1, PW EXT-INT, CC.

# SEALANT COVERAGE

Expected Yield In Linear Metres / 310ml Cartridge of Sealant:

For example: For a joint 6mm wide and 4mm deep you will get 12:9 linear metres per 310ml cartridge.

|                  |       | JOINT DEPTH (MM) |       |      |      |      |      |      |      |      |      |
|------------------|-------|------------------|-------|------|------|------|------|------|------|------|------|
| JOINT WIDTH (MM) |       | 1                | 2     | 3    | 4    | 5    | 6    | 7    | 8    | 9    | 10   |
|                  |       | 1                | 2     | 3    | 4    | 5    | 6    | 7    | 8    | 9    | 10   |
| 1                | 310.0 | 155.5            | 103.4 | 77.5 | 62.0 | 51.7 | 44.3 | 38.8 | 34.4 | 31.0 | 15.5 |
| 2                | 155.0 | 77.5             | 51.7  | 38.8 | 31.0 | 25.8 | 22.1 | 19.4 | 17.2 | 11.5 | 10.3 |
| 3                | 103.3 | 51.7             | 34.4  | 25.8 | 20.7 | 17.2 | 14.8 | 12.9 | 11.5 | 8.6  | 7.8  |
| 4                | 77.5  | 38.8             | 25.8  | 19.4 | 15.5 | 12.9 | 11.1 | 9.7  | 8.6  | 6.2  | 5.2  |
| 5                | 62.0  | 31.0             | 20.7  | 15.5 | 12.4 | 10.3 | 8.9  | 7.8  | 6.9  | 4.4  | 3.9  |
| 6                | 51.7  | 25.8             | 17.2  | 12.9 | 10.3 | 8.6  | 7.4  | 6.5  | 5.7  | 3.4  | 3.1  |
| 7                | 44.3  | 22.1             | 14.8  | 11.1 | 8.9  | 7.4  | 6.3  | 5.5  | 4.9  | 3.8  | 3.4  |
| 8                | 38.8  | 19.4             | 12.9  | 9.7  | 7.8  | 6.5  | 5.5  | 4.8  | 4.3  | 3.4  | 3.1  |
| 9                | 34.4  | 17.2             | 11.5  | 8.6  | 6.9  | 5.7  | 4.9  | 4.3  | 3.8  | 3.4  | 3.1  |
| 10               | 31.0  | 15.5             | 10.3  | 7.8  | 6.2  | 5.2  | 4.4  | 3.9  | 3.4  | 3.1  | 3.1  |

| Bond It Product                | Product Type       |                           |                          |             | Properties |               |        |                   | Compatibility with materials |                             |          |                         |                  |                  |            |                |                  |      |              |                 |       |          |         |        |          |                     |         |     |         |         |         |
|--------------------------------|--------------------|---------------------------|--------------------------|-------------|------------|---------------|--------|-------------------|------------------------------|-----------------------------|----------|-------------------------|------------------|------------------|------------|----------------|------------------|------|--------------|-----------------|-------|----------|---------|--------|----------|---------------------|---------|-----|---------|---------|---------|
|                                | Silicone (Acetoxy) | Neutral Silicone (Alkoxy) | Neutral Silicone (Oxime) | Water Based | Oil Based  | Solvent based | Hybrid | Polyurethane (PU) | Interior (dry)               | Interior (Occasionally wet) | Exterior | Damp Surface Compatible | High Temperature | Food Preparation | Fire Rated | Over Paintable | Fungal resistant | Wood | Metal (bare) | Metal (treated) | Glass | Ceramics | Plaster | Mortar | Concrete | Double Glazed Units | Aquaria | Tar | Bitumen | Asphalt | Mirrors |
| AS900 Acoustic Sealant         |                    |                           |                          | x           |            |               |        |                   | x                            | x                           |          |                         |                  |                  |            |                | x                | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         |         |         |
| Bath-Mate Sealant              |                    |                           |                          | x           |            |               |        |                   | x                            | x                           |          |                         |                  |                  |            |                | x                | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         |         |         |
| Build-Mate Sealant             |                    |                           |                          |             |            |               |        |                   |                              |                             | x        |                         |                  |                  |            |                | x                | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         | x       |         |
| Caulk-Mate                     |                    |                           |                          | x           |            |               |        |                   | x                            |                             |          |                         |                  |                  |            |                | x                | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         |         |         |
| Dec-Mate Caulk                 |                    |                           |                          | x           |            |               |        |                   | x                            |                             |          |                         |                  |                  |            |                | x                | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         |         |         |
| FG8 Silicone                   | x                  |                           |                          |             |            |               |        |                   | x                            | x                           |          |                         |                  |                  |            |                |                  | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         |         |         |
| Flash-Mate Silicone            |                    |                           | x                        |             |            |               |        |                   |                              |                             | x        |                         |                  |                  |            |                |                  | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         |         |         |
| Frame-Mate Sealant             |                    |                           |                          | x           |            |               |        |                   | x                            |                             |          |                         |                  |                  |            |                |                  | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         |         |         |
| FS4 Freshfield Sealant         |                    |                           |                          | x           |            |               |        |                   | x                            |                             |          |                         |                  |                  | x          |                |                  | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         |         |         |
| GB Pro                         |                    |                           |                          |             |            |               | x      |                   | x                            | x                           |          |                         |                  |                  |            | x              |                  | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         |         | x       |
| Get The Gist Silicone          |                    |                           | x                        |             |            |               |        |                   | x                            | x                           |          |                         |                  |                  |            |                | x                | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         |         |         |
| Glass-Mate Silicone            |                    |                           | x                        |             |            |               |        |                   | x                            | x                           |          |                         |                  |                  |            |                |                  | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         |         | x       |
| GP200 Silicone                 | x                  |                           |                          |             |            |               |        |                   | x                            | x                           |          |                         |                  |                  |            |                | x                | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         |         |         |
| H46 Silicone                   | x                  |                           |                          |             |            |               |        |                   | x                            | x                           |          |                         |                  |                  |            |                |                  | x    | x            | x               | x     | x        | x       | x      | x        |                     | x       |     |         |         |         |
| HT30 High Temperature Silicone | x                  |                           |                          |             |            |               |        |                   | x                            | x                           |          |                         |                  |                  |            |                |                  | x    | x            | x               | x     | x        | x       | x      | x        |                     |         |     |         |         |         |

| Bond It Product          | Product Type       |                           |                          |             |           |               |        |                   |                |                             |          | Properties              |                  |                  |            |                |                  | Compatibility with materials |              |                 |       |          |         |        |          |                     |         |     |         |         |         |  |  |  |
|--------------------------|--------------------|---------------------------|--------------------------|-------------|-----------|---------------|--------|-------------------|----------------|-----------------------------|----------|-------------------------|------------------|------------------|------------|----------------|------------------|------------------------------|--------------|-----------------|-------|----------|---------|--------|----------|---------------------|---------|-----|---------|---------|---------|--|--|--|
|                          | Silicone (Acetoxy) | Neutral Silicone (Alkoxy) | Neutral Silicone (Oxime) | Water Based | Oil Based | Solvent based | Hybrid | Polyurethane (PU) | Interior (dry) | Interior (Occasionally wet) | Exterior | Damp Surface Compatible | High Temperature | Food Preparation | Fire Rated | Over Paintable | Fungal resistant | Wood                         | Metal (bare) | Metal (treated) | Glass | Ceramics | Plaster | Mortar | Concrete | Double Glazed Units | Aquaria | Tar | Bitumen | Asphalt | Mirrors |  |  |  |
| LN45 Silicone            | x                  |                           |                          | x           |           |               |        |                   | x              | x                           | x        |                         |                  |                  |            |                |                  | x                            | x            | x               | x     |          |         |        |          |                     |         |     |         |         |         |  |  |  |
| Lami-Mate Sealant        |                    |                           |                          | x           |           |               |        |                   | x              |                             |          |                         |                  |                  |            | x              |                  | x                            |              | x               |       |          |         |        |          |                     |         |     |         |         |         |  |  |  |
| LN11 silicone            |                    |                           |                          |             |           |               |        |                   | x              | x                           | x        |                         |                  |                  | x          |                |                  | x                            | x            | x               | x     |          |         |        |          |                     |         |     |         |         |         |  |  |  |
| LN7 Silicone             |                    |                           |                          |             |           |               |        |                   | x              | x                           | x        |                         |                  |                  |            |                | x                | x                            | x            | x               | x     |          |         |        |          | x                   |         |     |         |         | x       |  |  |  |
| Multi-Mate Silicone      | x                  |                           |                          |             |           |               |        |                   | x              | x                           | x        |                         |                  |                  |            |                | x                | x                            | x            | x               | x     |          |         |        |          |                     |         |     |         |         |         |  |  |  |
| Pro-Mate Silicone        | x                  |                           |                          |             |           |               |        |                   | x              | x                           | x        |                         |                  |                  |            |                |                  | x                            | x            | x               | x     |          |         |        |          |                     |         |     |         |         |         |  |  |  |
| PU18 Polyurethane        |                    |                           |                          |             |           | x             |        |                   | x              | x                           | x        |                         |                  |                  |            | x              |                  | x                            | x            | x               | x     |          |         |        | x        |                     |         |     |         |         |         |  |  |  |
| Rain-Mate Sealant        |                    |                           |                          |             |           |               |        |                   | x              |                             | x        |                         |                  |                  | x          |                |                  | x                            | x            | x               |       |          |         | x      |          |                     |         | x   | x       |         |         |  |  |  |
| Roof-Mate Sealant        |                    |                           |                          |             |           |               |        |                   |                |                             | x        |                         |                  |                  | x          |                |                  | x                            | x            | x               |       |          |         | x      |          |                     |         | x   | x       |         |         |  |  |  |
| S3 Sanitary Silicone     | x                  |                           |                          |             |           |               |        |                   | x              | x                           | x        |                         |                  |                  |            |                | x                | x                            | x            | x               | x     |          |         |        |          |                     |         |     |         |         |         |  |  |  |
| Ultra-Mate Silicone      |                    | x                         |                          |             |           |               |        |                   | x              | x                           | x        |                         |                  |                  |            |                |                  | x                            | x            | x               | x     |          |         |        |          |                     |         |     |         |         |         |  |  |  |
| WP70 Silicone            |                    |                           | x                        |             |           |               |        |                   |                |                             | x        |                         |                  |                  |            |                |                  | x                            | x            | x               | x     |          |         |        |          |                     |         |     |         |         |         |  |  |  |
| Xtreme Sanitary Silicone | x                  |                           |                          |             |           |               |        |                   | x              | x                           | x        |                         |                  |                  |            |                | x                | x                            | x            | x               | x     |          |         |        |          |                     |         |     |         |         |         |  |  |  |



# ADHESIVES

There are many types of adhesive to choose from, here is a guide explaining the advantages for some of the common groups.

## PVA BASED ADHESIVE

PVA (or Poly Vinyl Acetate) are emulsions in water and are generally used as adhesives for porous materials as they cure by evaporation. They require a route for the water to escape and will not cure (dry) when encapsulated. Primary uses are for materials such as wood, paper and cloth. PVA adhesives do come in different grades and qualities, they are identified under EN 204 as D1, D2, D3 and D4; they are explained as follows:-

**D1** - A lower quality product for adhesive purposes with little or no water resistance. Many of us will remember this PVA glue as 'School Glue'; it is non toxic and low odour. These normally have a lower solids content (less polymer, more water) than higher grade wood glues. Generally used as sealers or bonding aids for plastering rather than as an adhesive.

**D2** - Generally a higher solids product with good adhesive properties. Suitable for interior woodworking, although not water resistant.

**D3** - A version of D2 with higher water resistance. Suitable for internal and external applications where occasionally wet conditions exist. Although not suitable for permanently damp, wet or permanently immersed locations. See our Duo 2 in 1 Wood Glue (page 58).

**D4** - High strength with water resistance, once cured can be immersed. One part D4 has a reduced shelf life (up to 6 months) and can have a strong odour. Two part products have a longer shelf life but require mixing together and using immediately. Another consideration when choosing a wood adhesive is its 'creep resistance'. This relates to the products performance when subjected to a sustained load (i.e. shelves). A product that conforms to BS EN 14256 should be used for applications subject to sustained loading.

## WATER BASED ADHESIVES

Water based gun applied adhesives are suitable for porous surfaces in internal or relatively dry external applications. For non-load bearing situations such as dry wall adhesive, cove adhesive or for dado rails, skirting boards,

# ADHESIVES

carpet gripper, etc. Cure rates will be slower than solvent based equivalents, as they will cure (dry) by evaporation. Different grades with different characteristics are available for the job in hand. See our Cove-mate (page 13) and Saves Nails Solvent-Free (page 15).

## POLYURETHANE (PU) ADHESIVE

Polyurethanes possess very high adhesion and water resistance properties, conforming to EN 204 D4. PU adhesive can be supplied either in a liquid, paste or gel form. They cure when exposed to moisture in the air and will 'foam up' slightly whilst curing, this gives excellent gap filling properties. Cure times are much reduced relative to PVA based adhesives. Being moisture cure they can be used on non porous materials. Being very water resistant, PU adhesives can be used in marine applications. See our PU Wood Glues on page 63.

## SOLVENT BASED ADHESIVES

Solvents are often used as a 'carrier' for the adhesive rather than water but still cure by evaporation (of the solvent). The advantage of this is that solvents have a much faster evaporation rates than water, giving faster cure rates and often a better initial grab. The solvent still needs to escape, so at least one of the materials being bonded needs to be porous. The down side is that solvents are flammable, often very smelly and can be an irritant or even toxic to humans. These factors should be taken into consideration when using adhesive containing solvents especially in confined spaces.

## GUNABLE SOLVENT BASED ADHESIVE

These are supplied in cartridge form and often used as a replacement for mechanical fixings such as nails and screws when fixing lightweight, non load bearing items such as dado rails, skirting boards, carpet gripper and stair nosing. Strong and durable, suitable for internal and external applications. Water based products are becoming more prominent for internal applications. Refer to products on pages 55 and 56, Gripbond and Saves Nails.

## CONTACT ADHESIVE

Contact adhesives have a unique method of application that gets around the issue of bonding large areas of impervious or non porous materials together. The adhesive is applied to both surfaces and the solvent

# ADHESIVES

carrier is allowed to evaporate before bringing the surfaces together. As there is no need for any solvent to escape, contact adhesives are used in areas such as laminating large surfaces and bonding rubber sheets to other impervious materials such as GRP (Fibreglass). See page 58.

## HYBRID (MS POLYMER OR SPUR) ADHESIVES

Extremely versatile when used as an adhesive; can be seen as the 'next generation' of grab adhesives relative to gunable solvent based products in performance and user friendliness. These are supplied in cartridges for application with a standard sealant gun. Hybrid Adhesives are moisture curing and dry to a durable flexible rubbery compound which offers good movement accommodation and gap-filling between many different materials. Suitable for internal and external applications to; metal, stone, brick, polystyrene, polycarbonate, PVC, uPVC, wood, concrete, plaster, glazing, automotive, marine, the list goes on.... These have been used in the building industry for some time but are now available as an 'All In One' sealant and adhesive for domestic use. Can even be used in damp conditions. See page 60 GB Pro and page 153 TS55.

## CYANOACRYLATE (CA) ADHESIVES

Often referred to as 'Superglue', CA adhesives are fast curing, moisture cure adhesives. CA requires close fitting joints, normally between small plastic or rubber parts. Higher viscosity versions will offer a small element of gap filling capability, but still require the joint to have a close fitting. Can be used to bond uPVC, rubber, wood, metal, ceramics, leather, porcelain and card among others. Note: CA will bond skin in seconds; care should be taken when using. Cyanoacrylate accelerator is available in an aerosol form to reduce the cure time, however the use of this will compromise the bond strength. For our full range available see pages 64-66.

## TILE ADHESIVES & GROUTS

Tile Adhesives –

**Why are there so many and which one do I need?**

As there are a variety of sizes and types of tiles adhered to many different types of substrates, in all manner of locations and different conditions, there are different types of adhesive required for specific applications.

# TILE ADHESIVES

When selecting the correct adhesive type for the job in hand, the following factors should be taken into account; the size and weight of the tile, porosity of the tile and substrate, type of substrate and the ambient conditions the installation will be subjected to during its life:- are the conditions wet, damp, permanently immersed or dry? Are they internal or external? On walls or floors? Are other variables such as under floor heating involved?

The Adhesives supplied are generally divided into two separate groups: cementitious (cement based powder adhesives) and dispersion (ready mixed, water based polymer adhesives).

## 1. DISPERSION ADHESIVES

Dispersion, or ready mixed adhesives, are supplied in tubs in a paste form. They are made up of fillers bound together by a synthetic water based polymer emulsion. All dispersion adhesives cure by evaporation, no chemical reaction or chemistry takes place during curing. It is simply left to the water to evaporate from the adhesive in order to dry. For this reason dispersion adhesives are not recommended for use when using large format\*, impervious tiles or impervious backgrounds as the water cannot escape. Evaporation can only take place through the grout joint or background – the water needs somewhere to go.

**\*Note:** a 'large format' tile is considered to be a tile with a surface area greater than 0.9m<sup>2</sup> or 900cm<sup>2</sup>. This means tiles that measure more than 30cm x 30cm (or 300mm x 300mm) should not be fixed with a ready mixed / dispersion adhesive.

Ready mixed adhesives are also limited to use on walls in dry or occasionally damp areas (such as domestic showers). In summary, dispersion adhesives have their place, when used on walls with tiles having a surface area no greater than 900cm<sup>2</sup> in more or less permanently dry conditions.

## 2. CEMENTITIOUS ADHESIVES

These are supplied in powder form to be mixed with a measured amount of water. Cement based adhesives are generally superior in performance to dispersion adhesives, they can be used either in place of ready mixed adhesives or can be used where the conditions do not permit the use of a ready mixed product.

# TILE ADHESIVES

Cement cures by chemical reaction (cement hydration), not just by evaporation. When a cement based product is mixed and placed in an airtight container, it will cure, even though evaporation cannot take place. However, care should be taken that porous backgrounds are correctly primed in order that the water is not 'sucked' out of the adhesive before the cement has hydrated. Because having a route for any water to escape by evaporation is not such an issue, cement adhesives can be used with large format tiles, including very impervious (non-porous) tiles such as porcelain and on impervious backgrounds. Depending on the grade or classification, cement based adhesives can be used in installations with under floor heating systems where thermal movement is likely, when tiling on plywood boarded floors where limited movement or vibration is likely, or even in permanently immersed locations such as swimming pools. The adhesion and / or flexibility properties should be observed for different applications with different demands.

## CE CLASSIFICATION

### Classification of Tile Adhesives – What do they mean?

EN12004 classifies tile adhesives, into type, class and characteristics. This should be shown on all compliant tile adhesive products. This describes the grade and subsequent suitability of the adhesive for certain applications. EN12004 is explained as follows:-

#### The first letter in the classification indicates the type:

D = Dispersion or ready mixed adhesive.

C = Cementitious, cement based, powder adhesives.

#### This is followed by a number that indicates its class:

1 = Normal strength adhesive, meets the minimum required level.

2 = Higher strength adhesive that exceeds class 1.

The type and class may (but not always) be followed by another letter that indicates any additional characteristics:

E = Extended open time.

T = Slip resistant.

F = Fast setting.

# TILE ADHESIVES & GROUTS

And finally, where applicable, relating to deformability (flexibility):

S1 = Deformable adhesive that meets the minimum standard.

Where we see EN12004 C2F S1; it is cementitious, High Strength Class 2, fast setting and deformable (flexible).

EN12004 D1T is translated to; dispersion adhesive, Normal Strength Class 1, slip resistant.

## TILE GROUTS

Tile grouts are classified under regulation EN13888 in a similar manner to tile adhesives.

#### Two letters determine the type:

CG = Cementitious grout, cement based powder.

#### The number to denote its class;

1 = Standard grout which meets the required standard.

2 = Grout which exceeds class 1 (reduced water absorption, increased abrasion resistance).

This translates to EN13888 CG1 being; cementitious grout, class 1.

In applications where a flexible (S1) adhesive has been used, a flexible grout should also be used.

## TILING FAQ'S

### Q. Can I use a standard CTA on floors incorporating under floor heating?

A. No, a flexible cement based adhesive must be used. The added polymer content accommodates the movement caused by the thermal expansion and contraction created by the heating.

### Q. Can I use a ready mixed tile adhesive to fix large format tiles?

A. No, it is generally accepted that a cement based adhesive should be used to fix tiles larger than 900cm<sup>2</sup> (i.e. 300mm x 300mm). Ready mixed adhesives depend upon evaporation in order to cure. Larger tiles do not allow the water to escape from the adhesive behind them, especially on non porous backgrounds, this extends the drying times considerably.

### Q. Can I tile directly onto existing tiles?

A. Yes, providing the tiles are sound, securely fixed, dry, clean and able to support the weight of the tiles and adhesive to be fixed to them. A key can be provided on glazed tiles by rubbing with coarse sandpaper and cleaned.



# TILE ADHESIVES & GROUTS

Any loose tiles or tiles that sound hollow when tapped should be secured first. Consideration regarding the size and porosity of the tile should be made when choosing the type of adhesive.

### Q. How do I fix natural stone tiles to floors?

A. A cement based adhesive should be used to fix natural stone, granite, limestone, marble, travertine and similar tiles. Consideration should be made as to whether a white cement based adhesive should be used when fixing lighter coloured tiles to avoid staining. ‘Solid Bed’ fixing is recommended, this is where a ribbed bed of adhesive is applied to the floor with a notched trowel and the back of the tile is ‘buttered’ with adhesive. Twisting and pushing the tile into place will provide near to 100% adhesive coverage (bedding) and support to the tile. Solid Bed Fixing is especially important when using tiles that may contain natural voids that can collapse given time.

### Q. What is Travertine?

A. Travertine is a type of limestone, it has been used in Italy as early as Roman times. It has a very low density, in its natural state is full of holes and voids, these are often filled with synthetic resins on the surface. Even high quality travertines can have voids and holes throughout. The ‘Solid Bed’ fixing technique as described above must be employed in order to provide sufficient support.

### Q. When can I use dot and dab fixing?

A. You can’t. The practice of dot and dab fixing is not recognised. This entails applying 5 blobs of adhesive (one in each corner and one in the centre) to the tile. This does not provide enough adhesive coverage or support to the tile.

### Q. Can I use PVA as a primer before tiling?

A. No. PVA is a bonding aid for plasterers and it is not water resistant. Either an acrylic type primer or SBR should be use to prime porous surfaces before the application of tile adhesive.

### Q. Do plaster walls need priming before tiling?

A. Yes. When using cement based adhesive, porous backgrounds should be primed with an appropriate primer. When using a ready mixed adhesive; priming is not required unless the surface is dusty or shiny.

Our full range of tiling products is listed on pages 67 to 75.

# TILE ADHESIVE MATRIX

## A GUIDE FOR CHOOSING TILE ADHESIVE AND GROUT BASED ON APPLICATION

The chart below shows compatibility of tile adhesive grades with common applications.

More detailed information and recommendations can be found in the catalogue for each product.

Technical Data Sheets are available on-line or upon request.

|  | LARGE FORMAT<br>TILES | UNDERFLOOR<br>HEATING | COMMUNAL<br>SHOWERS | DOMESTIC<br>SHOWERS | SWIMMING<br>POOLS | EXTERIOR | INTERIOR, DRY | FLOORS | WALLS |                        | BOND IT<br>PRODUCT CODE           | BOND IT PRODUCT<br>ADHESIVES | OTHER<br>PROPERTIES | TYPE /<br>CLASS |
|--|-----------------------|-----------------------|---------------------|---------------------|-------------------|----------|---------------|--------|-------|------------------------|-----------------------------------|------------------------------|---------------------|-----------------|
|  | X                     | X                     | X                   | X                   | X                 | X        | X             | X      | X     | WHITE                  | B0CTAF                            | CTA Flexible                 | TF51                | EN12004         |
|  | X                     | X                     | X                   | X                   | X                 | X        | X             | X      | X     | GREY / WHITE           | B0TRF / B0TRFWH                   | Rapid Flex                   | F                   | C2              |
|  | X                     | X                     | X                   | X                   | X                 | X        | X             | X      | X     | GREY / WHITE           | B0PTA20G /<br>B0PTA20W            | Porcelain Tile Adhesive      | TF                  | C2              |
|  | X                     |                       | X                   | X                   |                   | X        | X             | X      | X     | GREY                   | B0RS10 / 20                       | Rapid Set                    | F                   | C1              |
|  |                       |                       |                     | X                   |                   |          | X             |        | X     | OFF WHITE              | B0TA01 / 2                        | Aqua Tile<br>Fix 'N' Grout   |                     | D2              |
|  |                       |                       |                     |                     |                   |          | X             |        | X     | HIGH WHITE             | B81A10 / 11                       |                              |                     | D2              |
|  |                       |                       |                     |                     |                   |          | X             |        | X     | OFF WHITE              | B0TA17 / 18                       | Gripbond CTA                 | T                   | D1              |
|  |                       |                       |                     |                     |                   |          | X             |        | X     | OFF WHITE              | B0TA07 / 08 / 06                  | Super Grip                   | T                   | D1              |
|  |                       |                       |                     |                     |                   |          |               |        |       | GREY                   |                                   | GROUTS                       |                     | EN13888         |
|  |                       |                       |                     |                     |                   |          |               |        |       | GREY                   | B0FXG                             | Wide Joint Grout             | F                   | CG2             |
|  |                       |                       |                     |                     |                   |          |               |        |       | WH / IV / LS / BL / GR | B0SGWH3 / W3 /<br>LS3 / BL3 / GR3 | Steri-Grout                  | W                   | CG2             |
|  |                       |                       |                     |                     |                   |          |               |        |       | GREY                   | B0FTG                             | Floor Tile Grout             |                     | CG1             |
|  |                       |                       |                     |                     |                   |          |               |        |       | HIGH WHITE & IVORY     | B0WTG                             | Wall Tile Grout              |                     | CG1             |

● When used in conjunction with a high quality waterproof grout.

# CTACOVERAGE



## CERAMIC TILE ADHESIVE COVERAGE

Using a 6mm notched trowel:  
20kg bag of cement adhesive 6-7m<sup>2</sup>  
15kg bucket of ready mix 5-7m<sup>2</sup>

|             | TILE SIZE    | TILE THICKNESS | GROUT LINE WIDTH | COVERAGE                       |
|-------------|--------------|----------------|------------------|--------------------------------|
| WALL TILES  | 150mm square | 4mm            | 2mm              | 0.2kg grout per m <sup>2</sup> |
| FLOOR TILES | 300mm square | 10mm           | 5mm              | 0.5kg grout per m <sup>2</sup> |

Please observe the maximum and minimum solid bed depth recommendations for each product.  
Please download our technical specification sheets from [www.bond-it.co.uk](http://www.bond-it.co.uk) for application and coverage rates for each product.

# POLYURETHANEFOAM

EXPANDING POLYURETHANE FOAMS HAVE EXISTED FOR MANY YEARS BUT WITH THE UPTURN IN FAST TRACK CONSTRUCTION NECESSITY HAS LEAD TO THE GENERIC PU FOAM BEING MODIFIED AND TWEAKED SO THAT IT IS MORE SUITED FOR TODAYS BUILDING METHODOLOGY.

1. Hand Held or Straw Foam applicators are the most common types used. Aerosol propelled with simple straw dispenser that attaches to the valve. These have a limited usage life once opened and cannot be re-used once they have been restored. See pages 20-21, 31 and 38-39.
2. Gun Grade or Gun Foam is produced to a predominantly closed cell formulation, unlike Hand Held, which means it yields a higher extrusion rate. The benefit of gun grade is the gun allows for precision application meaning less wastage due to its variable valve. The gun should be purged with the gun foam cleaner after each use. See page 37.
3. Fire Rated Foam – normal foams are classed as self-extinguishing which means they will not support flames but they offer protection against them. Fire Rated Foams however, do offer fire retardant properties and are available in both hand held and gun options. With stringent building regulations dictating the use of such products, the correct foams for such applications should be tested to European Standards EN1366-4 which has superceded BS476 pt 20. These foams make ideal backing material to fill joints prior to sealing as the expansion ensures the void is completely filled thereby offering complete fire protection. Fire sealing applications can include: joints between dry wall or composite panels, gaps around window and door frames, gaps around switches and socket points, pipe access openings in order to maintain the integrity of the fire wall. See page 31.
4. Mega Foam – Bond it have a unique foam that is gun grade quality but in an aerosol format. With a specially patented valve it allows the tin to be used at 360 degree angle with either a special plastic adaptor of with the use of a standard applicator gun. See page 38.

# POLYURETHANEFOAM

- **QUALITY OF GUN GRADE FOAM WITH EASE OF USE OF A HAND HELD**
- **LOWER OPERATING TEMPERATURE THAN A STANDARD FOAM**
- **CAN BE USED AT ANY ANGLE**
- **LONGER LIFE THAN A STANDARD CAN**
- **MORE FOAM PER CAN WITH LESS WASTE**
- **CAN BE USED WITH A STANDARD FOAM GUN**
- **CAN BE STORED ON ITS SIDE DOES NOT HAVE TO REMAIN UPRIGHT**

## WATCH POINTS:

Make sure any foam tins are warmed to room temperature prior to use. This can be done by putting it in a bucket of warm water. Do not use naked flames or any other heat source to warm tins as they will explode

Store foam cans upright whilst stored or in transport. Shake cans vigorously before use.

Apply foam with the can inverted (unless using Mega Foam).

Moisten dry surfaces before application to help the foam cure and improve adhesion.

Protect surrounding surfaces prior to application as the foam is incredibly tacky.

Maintain foam guns keeping them clean by using a Gun Foam Cleaner after you change cans. This will prevent the gun from clogging and becoming unusable. Remove excess wet foam immediately after application.

# POLYURETHANEFOAM

Check the manufacture dates as most foam only has a shelf life of 12 months (Mega Foam has 18 months).

Do not puncture tins.

Store only at temperatures of between 15 and 20°C, climates that are too cold or too warm will affect the performance of the foam (Mega Foam has lower operating temperatures).

Do not store or use this product in the vicinity of naked flames.

## UNDERSTANDING FIRE FOAMS

A good example of the benefits of the CEN and ISO “global harmonisation of standards” can be seen with Fire Rated PU Expanding Foam. The German National Standard for these products is DIN4102, there are three classes within this standard: B1, B2 and B3; B1 being the least. However, even the German DIN4102 B1 classification often does not satisfy the building requirements for fire resistance in the UK. The British National Standard BS476 pt 20 is a more stringent test that addresses insulation and integrity properties, not just the spread of flame. Confusion has been caused by the DIN4102 standard being marketed in the UK as B1 or B2. B2 foams are generally a cheaper option but in terms of their fire resistance capabilities, they are well under par. It is imperative that if you are using products that **MUST** comply with fire resistance, then a B1 foam **MUST** be used to comply with legislation.

As explained, EN standards are accepted as national standards in CEN member states, EN1366-4 is the European standard and is accepted as a national standard in CEN member states including the UK. Refer to page 31 for details on our B1 Fire Foam.



# SEALERCOVERAGE

LITRES PER SQUARE METRE REQUIRED FOR SEALERS, PAINTS AND COATINGS

Product Type (Refer to Key)

| Area (m2) | A    | B    | C   | D    | E   | F    | G    | H    | I  | J    | Key                              | Type |
|-----------|------|------|-----|------|-----|------|------|------|----|------|----------------------------------|------|
| 1         | 0.03 | 0.05 | 0.1 | 0.17 | 0.2 | 0.25 | 0.4  | 0.75 | 1  | 1.5  | All Weather Roofing Compound     | H    |
| 2         | 0.50 | 0.10 | 0.2 | 0.33 | 0.4 | 0.5  | 0.8  | 1.5  | 2  | 3    | Aluminium Solar Reflective Paint | E    |
| 3         | 0.08 | 0.15 | 0.3 | 0.50 | 0.6 | 0.75 | 0.12 | 2.25 | 3  | 4.5  | Bitumen Paint                    | E    |
| 4         | 0.10 | 0.20 | 0.4 | 0.67 | 0.8 | 1    | 0.16 | 3    | 4  | 6    | Bitumen Primer                   | E    |
| 5         | 0.13 | 0.25 | 0.5 | 0.83 | 1   | 1.25 | 0.2  | 3.75 | 5  | 7.5  | Brick and Patio Cleaner          | D    |
| 6         | 0.15 | 0.30 | 0.6 | 1.00 | 1.2 | 1.5  | 0.24 | 4.5  | 6  | 9    | Chipping Solution                | F    |
| 7         | 0.18 | 0.35 | 0.7 | 1.17 | 1.4 | 1.75 | 0.28 | 5.25 | 7  | 10.5 | Clear Coat Block Sealer          | C    |
| 8         | 0.20 | 0.40 | 0.8 | 1.33 | 1.6 | 2    | 0.32 | 6    | 8  | 12   | Colour Enhancer                  | C    |
| 9         | 0.23 | 0.45 | 0.9 | 1.50 | 1.8 | 2.25 | 0.36 | 6.75 | 9  | 13.5 | Contractors PVA (Diluted 1:2)    | C    |
| 10        | 0.25 | 0.50 | 1   | 1.67 | 2   | 2.5  | 0.4  | 7.5  | 10 | 15   | Dustproof and Hardener           | F    |
|           |      |      |     |      |     |      |      |      |    |      | Felt Adhesive                    | I    |
|           |      |      |     |      |     |      |      |      |    |      | Moss Stop (Diluted 1:3)          | C    |
|           |      |      |     |      |     |      |      |      |    |      | Organic Cleaner                  | C    |
|           |      |      |     |      |     |      |      |      |    |      | Palmitation Oil                  | A    |
|           |      |      |     |      |     |      |      |      |    |      | Patio Blaster                    | E    |
|           |      |      |     |      |     |      |      |      |    |      | Patioseal                        | C    |
|           |      |      |     |      |     |      |      |      |    |      | Pregit                           | F    |
|           |      |      |     |      |     |      |      |      |    |      | PVA Bond                         | G    |
|           |      |      |     |      |     |      |      |      |    |      | Rubber Bitumen Emulsion          | H    |
|           |      |      |     |      |     |      |      |      |    |      | Sealacryl                        | J    |
|           |      |      |     |      |     |      |      |      |    |      | Silicone Ultra Waterseal         | F    |
|           |      |      |     |      |     |      |      |      |    |      | Stabilising Solution             | D    |
|           |      |      |     |      |     |      |      |      |    |      | Tarmac Restorer                  | E    |
|           |      |      |     |      |     |      |      |      |    |      | Waterseal                        | F    |

# SLFCCOVERAGE

EXPECTED AMOUNT OF SLFC REQUIRED / METRE SQUARED IN KG

SLFC Depth (mm)

| Area (m2) | 1    | 2    | 3    | 4    | 5    | 6     | 7     | 8     | 9     | 10    |
|-----------|------|------|------|------|------|-------|-------|-------|-------|-------|
| 1         | 1.8  | 3.6  | 5.4  | 7.2  | 9.0  | 10.8  | 12.6  | 14.4  | 16.2  | 18.0  |
| 2         | 3.6  | 7.2  | 10.8 | 14.4 | 18.0 | 21.6  | 25.2  | 28.8  | 32.4  | 36.0  |
| 3         | 5.4  | 10.8 | 16.2 | 21.6 | 27.0 | 32.4  | 37.8  | 43.2  | 48.6  | 54.0  |
| 4         | 7.2  | 14.4 | 21.6 | 28.8 | 36.0 | 43.2  | 50.4  | 57.6  | 64.8  | 72.0  |
| 5         | 9.0  | 18.0 | 27.0 | 36.0 | 45.0 | 54.0  | 63.0  | 72.0  | 81.0  | 90.0  |
| 6         | 10.8 | 21.6 | 32.4 | 43.2 | 54.0 | 64.8  | 75.6  | 86.4  | 97.2  | 108.0 |
| 7         | 12.6 | 25.2 | 37.8 | 50.4 | 63.0 | 75.6  | 88.2  | 100.8 | 113.4 | 126.0 |
| 8         | 14.4 | 28.8 | 43.2 | 57.6 | 72.0 | 86.4  | 100.8 | 115.2 | 129.6 | 144.0 |
| 9         | 16.2 | 32.4 | 48.6 | 64.8 | 81.0 | 97.2  | 113.4 | 129.6 | 145.8 | 162.0 |
| 10        | 18.0 | 36.0 | 54.0 | 72.0 | 90.0 | 108.0 | 126.0 | 144.0 | 162.0 | 180.0 |

# TERMS&CONDITIONS

## 1. DEFINITION

- (a) The Company means Seal It Services T/A Bond It.
- (b) The Customer means the Company or person which or who has contracted with the Company for the purchase of goods.
- (c) The Contract means the Contract constituted by the Company's acceptance of an order.

2. Subject to any special terms to which the Company may agree in writing, every Contract constituted by the Company's acceptance of an order will be subject to these terms and conditions to the exclusion of all terms and conditions (standard or otherwise) which the Customer may seek to impose. The placing of an order will be deemed to constitute acceptance of this term.

3. (a) Nothing in these terms or the Company's current price list shall be deemed to constitute an offer, and the Company reserves the right to refuse any order
- (b) All orders are accepted subject to the availability of the goods concerned.
- (c) A quotation by the Company does not constitute an offer but remains open to an offer within 30 days. An offer or order to purchase goods the subject of a quotation is not deemed to be accepted without written confirmation from the Company.

## 4. PRICES

- (a) List prices are subject to alteration at any time without notice and all orders are accepted on condition that they are charged at prices ruling at the date of despatch.
- (b) Contract orders at agreed firm prices must be confirmed by the Company in writing at the time the orders are accepted.
- (c) Prices are subject to the addition of Valued Added Tax at the rates in force at the date of supply.
- (d) Bond It may at any time require the Purchaser to make payment in advance of delivery.

## 5. PAYMENT

- (a) Payment for goods is due not later than the end of the month following the date of invoice. After that date the invoice will be overdue.
- (b) Without prejudice to any other rights of the Company interest will be charged at the rate of 21/2% per month from the due date on accounts which remain unpaid 30 days after the date they bear and interest will continue to accrue after judgement in any court at the higher of this rate or the rate specified by the court.
- (c) The Customer shall not be entitled to withhold payment of any sums due to the Company by reason of any dispute relating to any goods or deliveries.
- (d) If the Customer fails to make payment by the due date then without prejudice to any other rights of the Company:-
  - (i) the Company shall be entitled to suspend all deliveries under the Contract with the Customer, and in such event the Customer shall not be released from its obligations to the Company, under the Contract or any other Contract.
  - (ii) the Company shall also be entitled to treat the Contract and/or any other Contract with the Customer as having been terminated by the Customer and to claim damages for breach of Contract.
- (e) Bond It shall not be bound by any oral quotation given, unless confirmed in writing. Goods will be invoiced at the

price ruling at the date of despatch and a carriage contribution may be payable based on rates then applicable Bond It reserves the right to vary prices without notice. Discounts do not apply unless by arrangement with Bond It.

## 6. DELIVERY DATES

- (a) Any dates quoted for the manufacture or delivery of goods are intended to be estimates only, but the Company will use reasonable efforts to deliver on dates promised. In no event shall time be of the essence of the Contract as regards delivery and the Customer shall not be entitled to refuse to accept goods because of late delivery.
- (b) So long as any circumstances whatsoever beyond the Company's control prevent or delay manufacture or delivery, the Company shall not be bound to manufacture or make delivery of any goods which it may have contracted to manufacture sell or supply.
- (c) The Company shall not be liable in any matter whatsoever for failure or delay in manufacture or delivery however such a failure or delay shall have been caused and provided that the Company shall have made reasonable efforts to deliver the goods ordered.
- (d) The Company shall have the option to effect delivery by instalments and to issue a separate invoice in respect of each instalment.
- (e) The Company publish its "carriage paid" minimum order values and surcharges on the Bond It website. Carriage contribution will be charged on all order below the thresholds at cost so advised. These charges form part of the Sales Contract.

## 7. DELIVERY AND CARRIAGE

Delivery shall be deemed to have taken place:-

- (a) In the case of carriage arranged by the Company by its own transport or otherwise, when goods are taken from the vehicle at the delivery point in the United Kingdom specified in writing by the Customer and agreed by the Company prior to despatch.
- (b) In the case of carriage arranged by the Customer by its own transport or otherwise when the goods are loaded onto the vehicle used.
- (c) Requests for deliveries to contract sites will be facilitated as much as possible with the cooperation of our carriers. Please ensure that there is assistance available off loading. Information on date of delivery is given in good faith. Bond It cannot accept responsibility for delays in delivery however caused. If the carrier is unable to facilitate delivery to site due to failure of Customer to advise on restrictions for off loading at site (tail lift requirement for example) the Customer will be responsible for cost of aborted delivery.
- (d) If goods are damaged in transit the carriers note must be endorsed accordingly and Bond It notified of the damage within 7 days. Failure to notify will invalidate any claim.

## 8. RISK

- (a) The risk in the goods will pass to the Customer upon delivery.
- (b) The Customer shall inspect goods immediately and shall within 3 days of delivery, time being of the essence, give notice in writing to the Company and to the carrier of any claims on account of damage or total or partial loss of goods in transit. The Customer will be deemed to have inspected and accepted goods

as satisfactory.

- (c) Notice on non-delivery must be given in writing by the Customer within 7 days of the date of invoice otherwise claims will not be accepted.
- (d) If the Customer shall fail to make such notification (whether by reason of its failure to carry out an inspection of the goods in sufficient time or for any other reason) the Company shall be under no liability whatsoever in respect of any loss of or damage to the goods howsoever occurring after they were handed to the carrier and the Customer shall remain liable to pay the full price for goods so lost or damaged.

## 9. PASSING OF PROPERTY

- (a) The Property in any goods delivered by the Company to the Customer shall remain in the Company until such time as the Customer has paid in full for those goods and for any other goods delivered by the Company to the Customer.
- (b) Notwithstanding this reservation of ownership, and subject to sub-clause 9c, the Customer has the Company's consent to re-sell any goods which remain the property of the Company in which event the Customer shall remit the proceeds of such sale to the Company up to the amount of any sums then owing under sub-clause 9a and until so doing shall hold such proceeds of sale on behalf of the Company in such a way that they are kept separate and readily identifiable.
- (c) If the Customer:-
  - (i) has bankruptcy petition issued against the Customer, or
  - (ii) goes into liquidation whether voluntary or compulsory, or
  - (iii) makes an arrangement with the Customers creditor's, or
  - (iv) has an administrative receiver appointed over any of the Customer's assets, or
  - (v) receives a written demand from the Company to pay overdue sums owed to the Customer, or
  - (vi) enters into a voluntary arrangement approved by the court.

Then the Customer's consent from the Company to do the acts referred to in sub-clause 9b shall determine and be deemed to have determined forthwith and the Customer shall not thereafter sell or use goods belonging to the Company, save with the consent in writing of the Company, until the Company has been paid in full in accordance with sub-clause 9a.

- (d) The Company may recover and dispose of any goods in which the Company has retained the property under sub-clause 9a and upon the happening of any of the events referred to in sub clause 9c the Company or persons authorised by the Company may for that purpose enter upon any premises where such goods may be.
- (e) The Customer agrees to store all goods that are the property of the Company in such a way that are readily identifiable as such and to make a note in its accounting records that goods are the property of the Company.

## 10. INSOLVENCY

Upon the happening of any of the following events:-

- (a) If the Customer shall make any default in paying any sum under any contract with the Company as and when it becomes due, or
- (ii) shall have distress or execution levied on any of its goods or property, or
- (iii) shall make or offer to make any arrangements or composition with creditors, or
- (iv) shall make any voluntary arrangement approved by the court.
- (b) If the Customer being a limited company, any resolution or petition to wind up the Customer (other than for the purpose of

reconstruction or amalgamation without insolvency) shall be passed or presented, or if a Receiver shall be appointed over the whole or any part of the Customer's business, or

- (c) If the Customer shall commit any act of bankruptcy or have a petition presented against him; all sums owing by the Customer to the Company shall become immediately due and for the time being and the Company shall have the right forthwith to suspend all further manufacturing or other work carried out for the Customer and to withhold all further deliveries of goods or to determine any contract then subsisting between the Company and the Customer. Such determination shall give rise to no liability whatsoever on the Company's part but shall be without prejudice to the Company's rights to payment in respect of manufacturing or other work already carried out or goods already delivered.

## 11. LIABILITY

- (a) The Company's total liability to the Customer in respect of defective goods (whether arising pursuant to the Contract or to Statute or Common Law) will be limited to the replacement of the goods concerned or (at the Company's option) the making of an allowance not exceeding the price paid for them, and the Company will not in any event be liable for any labour or other charges in connection with the installation or removal of defective or replacement goods. All liability of the Company to the Customer of whatsoever kind, and from whatever cause arising, beyond the foregoing limit is hereby excluded. Notwithstanding the foregoing
- (i) The Company will be under no liability to the Customer (whether pursuant to any Contract or otherwise as aforesaid) in respect of any goods sold as imperfect or under any other similar description, nor in respect of any matter relating to the improper installation of goods.
- (ii) Any guarantee which may have been applied by the Company to any goods will apply (but subject to the foregoing limit) only to goods purchased by the Customer on normal trading conditions at list price or at any price the subject of a quotation. Nothing in this clause shall apply to the terms implied by Section 12 of the Sale of Goods Act 1979. The Company shall not be obliged to consider grounds for return of goods or claims for compensation unless the claim and the reason for it are made in writing to the Company.

- (b) The Purchaser shall determine the suitability of the products for their intended use and shall not rely upon any representations made by or on behalf of Bond It. The Purchaser must satisfy themselves that the goods are fit for the purpose for which the Purchaser intends to use them save as herein stated or expressed or implied statutory or other warranties, representations, whether as to fitness or otherwise, relating to the goods supplied by Bond It is hereby excluded.
- (c) Bond It shall not be liable to the Purchaser for any loss, damage, delay, injury or any consequential or special loss or damage sustained by the customer whatsoever, howsoever and whensoever caused arising directly or indirectly out of or in connection with the performance or non performance of Bond It's obligation, including but without prejudice to the generality of the foregoing, loss or damage or delay caused by any faulty or unsatisfactory goods sold.

## 12. SET OFFS

The Customer shall not be entitled to withhold

payment of any sums after it has become due by reason of any right of set off or counter-claim which the Customer may have or allege or for any other reason whatsoever.

13. POSTPONEMENT OF DELIVERY

In the event that the Customer requests a postponement in the manufacture or delivery of goods, the Customer will be liable to pay for the goods at the price ruling at the date on which they are eventually dispatched (notwithstanding the fact that the Company may have agreed a fixed price). The Customer shall also be liable to pay to the Company on demand a charge to be laid down by the Company in respect of the storage and handling of the goods during the period of postponement and to reimburse to the Company on demand any charges incurred by the Company in effecting storage with a third party. If the Customer does not specify a date for delivery or if when a specified date is reached the Customer then asks the Company to delay delivery of the goods, without fixing a date for delivery, the company shall not be bound to deliver the goods, and may treat such requests as breach of Contract.

14. RETURNS

The Company will not accept the return of any goods to it unless such return has received its prior approval. Subject to the foregoing, goods which are returned for credit owing to error on the part of the Customer (including returns arising from duplication of orders owing to the failure of the Customer to mark confirmation orders as such) will be credited at 80% of the original price provided that the goods are in perfect condition; if they are not in perfect condition; if they are not in perfect condition (as to which or special loss or damage sustained by the customer whatsoever, howsoever and whensoever caused arising directly or indirectly out of or in connection with the performance or non performance of Bond It's obligation, including but without prejudice to the generality of the foregoing, loss or damage or delay caused by any faulty or unsatisfactory goods sold.

15. CATALOGUES, ETC.

All drawings, illustrations, descriptions and specifications in the Company's catalogues, price lists and other advertising material are intended to give no more than a general idea of the goods manufactured by the Company and such information is not intended to be and shall not be relied upon as giving a precise description of any goods nor as being representation as to any matter contained therein, nor shall any of it form part of any Contract with the Customer.

16. DEBT COLLECTIONS

In the event that the Company shall employ a professional Debt Collection Agency or Solicitor to collect any monies due to the Company (whether or not a demand therefore Company (whether or not a demand therefore shall have previously been made) the full costs incurred by the Company in doing so shall be paid by the Customer to the Company and be due 30 days after the Company shall have made a written demand therefore, interest shall be payable at the rate mentioned in clause 10 on such sums as are not paid by the due date.

17. WAIVER

No waiver by the Company (expressed or implied) of any of these conditions in any Contract made with the Company shall prevent the Company from enforcing or relying on these conditions in any subsequent Contracts made with the Customer.

18. LAW

These Terms & Conditions and the Contract shall be governed by English Law.

19. EXPORTS FROM U.K.

Where goods are exported from the United Kingdom the following provisions of this clause shall apply to the contract in substitution for the provision of clause 8 hereof. Goods for export will

unless otherwise agreed be quoted ex works to a United Kingdom Company's premises selected by the Company. Where goods are exported on FOB or CIF Terms, the costs and charges incurred by the Company shall form an addition to the price of the goods payable in the same manner and at the same time. The risk in goods sold on FOB and CIF terms shall pass when they cross the ship's rail at the port of loading.

20. COPYRIGHT

(a) Where the Company manufactures goods to a design provided or specified by the Customer (not being an existing design of the Company) the Customer shall indemnify the Company against all damages, costs, claims, losses and expenses paid or incurred by the Company (including all sums paid by the Company in settlement of any claim or action) in consequence of the infringement or alleged infringement of patent, trademark, registered design, copyright or other legal rights of a third party, and

(b) For the purpose of Section 12 of the Sale Of Goods Act 1979, the Company shall be bound to transfer only such title to the goods as it may have.

21. INDEMNITY

Customer shall indemnify the Company from and against all liability loss, damage, injury cost, expenses claims and demands arising from and cause other than negligence or breach of Contract by the Company.

22. GENERAL

- (a) Any notice to be given under these conditions may be delivered, or be sent by prepaid post, sent first class, addressed to the party to be served at its registered office for the time being or (if not a Company) the address for that party last known to the party giving notice. Notices served by post shall (except where expressly provided otherwise) be deemed served on the second business day after the date of posting. Business Day shall mean a day other than a Saturday and Sunday or an English Bank or Statutory Public Holiday.
- (b) In the event that any of these conditions shall become or shall be declared by any court of competent jurisdiction to be invalid or unenforceable in any way, such invalidity or unenforceability shall in no way impair or affect any of the other conditions hereof all of which remain in full force and effect.
- (c) Clause headings are for ease of reference only and do not affect construction.

23. MONTHLY STANDING ORDERS

Where the Contract relates to orders accepted on the basis of their being repeated monthly (standing orders), the Customer must give not less than 60 days notice in writing to terminate the Contract. Any orders due to be supplied under the Contract within this notice period shall be honoured by the Customer. The Company may at its absolute discretion agree not to deliver all or part of the orders due within the notice period in which case the Customer shall be liable to any cancellation charge equal to 15% of the quoted value in respect of the orders not delivered.

Seal It Services Ltd, T/a Bond It, Unit G16, River Bank Way, Lowfields Business Park, Elland, West Yorkshire. HX5 9DN.

INDEXPAGE

MATE RANGE

Silicone Sealants

De-Bond Mate Silicone Eater..... Pg. 19

Flash-Mate Lead Sealant .....Pg. 10

Glass-Mate Mirror Adhesive.....Pg. 11

GP200 Silicone.....Pg. 14

Multi-Mate

Multi-Purpose Silicone .....Pg. 9

Pro-Mate Glazing Silicone ..... Pg. 10

Ulti-Mate Builders Silicone ..... Pg. 9

Waterborne Fillers/ Specialist Sealants and Adhesives

Bath-Mate Bath & Kitchen Sealant .....Pg. 17

Build-Mate Building Mastic ..... Pg. 11

Caulk-Mate Decorators Caulk.....Pg. 18

Cove-Mate Coving Adhesive ..... Pg. 13

Dec-Mate Flexible Filler.....Pg. 18

Frame-Mate Door & Window Sealant .....Pg. 19

Lami-Mate Timber & Laminate Sealant .....Pg. 13

Rain-Mate

All Weather Sealant.....Pg. 12

Roof-Mate

Roof & Gutter Sealant .....Pg. 12

Saves Nails Adhesive.....Pg. 16

Saves Nails Adhesive Tape .....Pg. 17

Saves Nails Solvent-Free .....Pg. 15

Polyurethane Foams

Economy Sealant Guns .....Pg. 21

Fill & Fix Expanding Foam Filler... Pg. 20

Heavy Duty Gun

Foam Applicator.....Pg. 21

Professional Gun Foam Applicator .....Pg. 20

Sealant Guide

Sealant Description, Use, etc..... Pg. 22-24

PREMIERE RANGE

Silicone Sealants

HA6 RTV Marine Silicone.....Pg. 28

LA5 LMA Silicone .....Pg. 28

LN7 LMN Silicone .....Pg. 29

S3 Sanitary Sealant.....Pg. 27

WG4 Weatherguard Silicone .....Pg. 27

Specialist Sealants

AS900 Acoustic Sealant.....Pg. 34

FG8 Food Grade Silicone .....Pg. 29

FS4 Fireshield

AC Intumescent Sealant .....Pg. 30

Gist.....Pg. 35

HT30 High Temperature Silicone .....Pg. 31

LN11 Firescreen Silicone.....Pg. 30

PU18 Polyurethane Adhesive & Sealant..... Pg. 37

Reload.....Pg. 36

WP70 Silicone .....Pg. 32

WP100 Silicone .....Pg. 33

Xtreme Silicone .....Pg. 34

Polyurethane Foams

Expanding Foam Gun Cleaner .. Pg. 37

Fire Resistant Expanding PU Foam.. .....Pg. 31

Heavy Duty Gun Foam Applicator.....Pg. 39

Mega Foam Expanding Foam ... Pg. 38

Professional Gun Foam Applicator. ....Pg. 39

ANCILLARY PRODUCTS

Applicator Guns

Applicator Guns .....Pg. 40-41

DECORATORS RANGE

Fillers & Preparatory Products

One Hit Wonder

Lightweight Filler.....Pg. 45

Ready Mixed

Multi-Purpose Filler.....Pg. 46

Stain Block .....Pg. 45

Dust Sheets & Protectors

All Purpose

Polythene Dust Sheets.....Pg. 47

Cover-It Floor Protectors.....Pg. 48

Heavy Duty Cotton

Twill Dust Sheets.....Pg. 47

Silicone Sealants & Adhesives

Caulk-Mate Decorators Caulk .... Pg. 50

Cove-Mate Coving Adhesive ..... Pg. 49

Dec-Mate Flexible Filler.....Pg. 50

Gripbond White Solvent-Free .... Pg. 51

Lami-Mate Timber & Laminate Sealant .....Pg. 49

Saves Nails Adhesive Tape.....Pg. 52

Saves Nails Solvent-Free .....Pg. 51

ADHESIVE RANGE

Specialist Glues

Aerosol Spray Adhesive.....Pg. 66

Anchor Bond .....Pg. 57

Contact Adhesive.....Pg. 58

Contractors Grade PVA.....Pg. 59

Duo "2 in 1" Wood Glue.....Pg. 58

GB Pro.....Pg. 61

Gripbond.....Pg. 55

Gripbond White Solvent-Free .... Pg. 55

Mega Stik

PU Construction Adhesive.....Pg. 62

PU Wood Glue .....Pg. 63

PVA Adhesive & Sealer.....Pg. 59



# INDEXPAGE

|                               |        |                      |        |
|-------------------------------|--------|----------------------|--------|
| Saves Nails Adhesive.....     | Pg. 56 | SBR Admixture.....   | Pg. 83 |
| Saves Nails Solvent-Free..... | Pg. 56 | Tanking Slurry ..... | Pg. 89 |

## Industrial Glues

|                                  |        |
|----------------------------------|--------|
| A43 Threadlock.....              | Pg. 63 |
| A70 Studlock.....                | Pg. 63 |
| Cyanoacrylate Accelerator.....   | Pg. 64 |
| HVC Cyanoacrylate Superglue..    | Pg. 64 |
| Mitre Kit Adhesive .....         | Pg. 65 |
| Multi-Purpose Spray Lubricant .. | Pg. 65 |
| RGC Cyanoacrylate Superglue .    | Pg. 64 |
| Silicone Release Spray .....     | Pg. 65 |

## TILE ADHESIVES & GROUTS

### Ready Mixed Adhesives

|                     |        |
|---------------------|--------|
| Aqua-Tile.....      | Pg. 69 |
| Fix 'N' Grout ..... | Pg. 70 |
| Gripbond CTA .....  | Pg. 70 |
| Super-Grip.....     | Pg. 69 |

### Cement Based Products

|                                |        |
|--------------------------------|--------|
| CTA Flexible .....             | Pg. 73 |
| Flexible Wide Joint Grout..... | Pg. 73 |
| Floor Tile Grout .....         | Pg. 72 |
| Porcelain and Natural          |        |
| Stone Tile Adhesive .....      | Pg. 75 |
| Primer and Flexible Admix..... | Pg. 75 |
| Rapid Flex .....               | Pg. 74 |
| Rapid Set.....                 | Pg. 74 |
| Steri-Grout.....               | Pg. 71 |
| Wall Tile Grout.....           | Pg. 72 |

## BUILDERS COMPLETE

### Building Chemicals & Mixes

|                                 |        |
|---------------------------------|--------|
| Brick & Patio Cleaner .....     | Pg. 79 |
| Cemquik .....                   | Pg. 90 |
| Dustproofer & Hardener.....     | Pg. 80 |
| Exterior Pregrit .....          | Pg. 88 |
| Fire Cement.....                | Pg. 91 |
| Frostproofer & Rapid Hardener . | Pg. 80 |
| High Strength Brick Acid .....  | Pg. 79 |
| Integral Waterproof .....       | Pg. 81 |
| LevelMaster Ad-Floor .....      | Pg. 92 |
| LevelMaster Ad-Floor Plus.....  | Pg. 93 |
| LevelMaster Latex Liquid .....  | Pg. 94 |
| LevelMaster Self-Levelling      |        |
| Compound.....                   | Pg. 94 |
| Liquid Mortar Plasticiser ..... | Pg. 81 |
| Mould Stop.....                 | Pg. 82 |
| Mould Release Oil.....          | Pg. 86 |
| Patination Oil.....             | Pg. 87 |
| Patio Blaster .....             | Pg. 84 |
| Plasterers Pregrit.....         | Pg. 88 |
| Plug-It Rapid Setting Plug..... | Pg. 90 |
| Powder Mortar Plasticiser ..... | Pg. 87 |
| Power Frost.....                | Pg. 85 |
| Power Mix.....                  | Pg. 86 |
| Power Proof.....                | Pg. 85 |
| Stabilizing Solution.....       | Pg. 83 |

## Cleaning Products

|                           |        |
|---------------------------|--------|
| Foil Safe.....            | Pg. 96 |
| Glass Cleaner.....        | Pg. 97 |
| Multi-Wipes.....          | Pg. 96 |
| Paper Towels.....         | Pg. 96 |
| PVCu Cream Cleaner.....   | Pg. 97 |
| PVCu Solvent Cleaner..... | Pg. 97 |

## Adhesive Tapes

|                         |        |
|-------------------------|--------|
| Duct Tape .....         | Pg. 99 |
| Drywall Scrim Tape..... | Pg. 98 |
| Masking Tape.....       | Pg. 98 |

## Paints & Dyes

|                               |         |
|-------------------------------|---------|
| Anti-Climb Paint.....         | Pg. 100 |
| Line-It Linemarker Paint..... | Pg. 101 |
| Powdered Cement Dye.....      | Pg. 100 |

## CLEAN IT RANGE

|                                   |         |
|-----------------------------------|---------|
| Drain Blaster.....                | Pg. 110 |
| Graffiti Remover .....            | Pg. 108 |
| Laminate & Wood Cleaner.....      | Pg. 105 |
| Limescale Remover .....           | Pg. 109 |
| Mould Stop.....                   | Pg. 107 |
| Natural Tile Sealer & Polish..... | Pg. 106 |
| Non-Smear Glass Cleaner.....      | Pg. 105 |
| Organic Cleaner.....              | Pg. 105 |
| Paint Stripper.....               | Pg. 109 |
| Shower Screen & Tile Cleaner..... | Pg. 106 |

## ECO RANGE

|                       |         |
|-----------------------|---------|
| Eco Cem-Klene.....    | Pg. 113 |
| Eco Hydro Clean ..... | Pg. 113 |

## DRIVE ALIVE RANGE

|                                 |         |
|---------------------------------|---------|
| Clear Coat Block Sealer.....    | Pg. 119 |
| Colour Enhancer.....            | Pg. 118 |
| Decking Cleaner .....           | Pg. 124 |
| Decking Oil.....                | Pg. 124 |
| Drive Alive Membrane .....      | Pg. 125 |
| Instant Pot Hole Repairer ..... | Pg. 121 |
| Landscape Membrane .....        | Pg. 125 |
| Oil Stain Remover.....          | Pg. 117 |
| Organic Cleaner.....            | Pg. 117 |
| Patio Seal.....                 | Pg. 123 |
| Tarmac Restorer.....            | Pg. 120 |
| Weed Stop Membrane.....         | Pg. 125 |
| Wide-Gap Joint-Fill .....       | Pg. 122 |

## BITUBOND RANGE

### Bitumen Compounds

|                                    |         |
|------------------------------------|---------|
| All Weather Roofing Compound ..    | Pg. 129 |
| Aluminium Solar Reflective Paint.. | Pg. 129 |
| Bitumen Paint.....                 | Pg. 130 |
| Bitumen Primer.....                | Pg. 130 |
| Chipping Solution .....            | Pg. 131 |
| Damp Proof Courses.....            | Pg. 135 |

# INDEXPAGE

|                              |         |
|------------------------------|---------|
| Felt Adhesive.....           | Pg. 131 |
| Flashing Tapes.....          | Pg. 134 |
| Rubber Bitumen Emulsion..... | Pg. 132 |
| Tanking Membrane.....        | Pg. 135 |
| Trowel Mastic .....          | Pg. 132 |

## Waterproofing Systems

|                               |         |
|-------------------------------|---------|
| Sealacryl.....                | Pg. 136 |
| Silicone Ultra Waterseal..... | Pg. 137 |
| Waterseal .....               | Pg. 137 |

## PLUMBING SOLUTIONS

### Plumbing Products & Accessories

|                                 |         |
|---------------------------------|---------|
| PC100 Inhibitor.....            | Pg. 141 |
| PC101 Build Cert Inhibitor..... | Pg. 141 |
| PC200 Inhibitor.....            | Pg. 142 |
| PC300 Uniclean .....            | Pg. 142 |
| PC400 Flushchem .....           | Pg. 143 |
| PC500 Radleak .....             | Pg. 143 |
| PC600 Noise Buster .....        | Pg. 144 |
| PC700 Bondflux.....             | Pg. 144 |
| PC800 Pipe Seal.....            | Pg. 145 |
| PC900 Pipe Jointing             |         |
| Compound.....                   | Pg. 145 |
| Threadseal PTFE Tape .....      | Pg. 145 |

## FLOORING RANGE

### High Quality Flooring Products

|                       |         |
|-----------------------|---------|
| Contact Adhesive..... | Pg. 154 |
|-----------------------|---------|

|                                 |         |
|---------------------------------|---------|
| Floorbond CTT.....              | Pg. 152 |
| Floorbond GPA Adhesive.....     | Pg. 149 |
| Floorbond MPA.....              | Pg. 150 |
| Floorbond PSA .....             | Pg. 150 |
| Floorbond TS55 Wood Adhesive .. | Pg. 153 |
| LX16.....                       | Pg. 149 |
| PU Wood Glue.....               | Pg. 154 |
| Resiprime DPM .....             | Pg. 151 |

## RESCUE & REPAIR

|                  |         |
|------------------|---------|
| Rescue Tape..... | Pg. 157 |
|------------------|---------|

## BOND IT MERCHANDISING

### Point of Sale Items

|                       |         |
|-----------------------|---------|
| Aisle Flags.....      | Pg. 163 |
| Banners.....          | Pg. 167 |
| Cartridge Strips..... | Pg. 165 |
| Cartridge Trays.....  | Pg. 167 |
| Counter Display ..... | Pg. 162 |
| DVD'S.....            | Pg. 166 |
| Floor Stands.....     | Pg. 162 |
| Floor Graphics .....  | Pg. 164 |
| Fixture Flags.....    | Pg. 165 |
| Headers .....         | Pg. 164 |
| Penknives .....       | Pg. 166 |
| POS Leaflets.....     | Pg. 166 |
| Shelf Strips .....    | Pg. 165 |
| Ship-Off.....         | Pg. 166 |
| Window Stickers.....  | Pg. 165 |



15 horizontal dotted lines for notes.

15 horizontal dotted lines for notes.

|                |
|----------------|
| MATE           |
| PREMIERE       |
| DECORATIONS    |
| ADHESIVES      |
| TILE ADHESIVES |
| BUILDING       |
| CLEAN IT       |
| ECO            |
| DRIVE ALIVE    |
| BITUBOND       |
| PLUMBING       |
| FLOORING       |
| RESCUE         |

# ICONKEY



SUITABLE FOR  
EXTERNAL USE ONLY



SUITABLE FOR  
INTERNAL USE ONLY



SUITABLE FOR  
BOTH EXTERNAL &  
INTERNAL USE



SIZE - VOLUME



SIZE - WEIGHT



LIFE



MOVEMENT  
H = HIGH  
M = MEDIUM  
L = LOW



FUNGAL  
RESISTANT



STRENGTH



APPLICATION  
THICKNESS UP TO  
SIZE INDICATED



BRIDGES GAPS UP TO  
SIZE INDICATED



GLOVES  
INCLUDED



TEMPERATURE  
STABILITY



YIELDS UP TO



RATED CLASS



MATERIAL  
THICKNESS



GUARANTEE



SPRAY CAN  
APPLICATION

## APPLICATION ICONS



BROOM  
APPLICATION



TROWEL  
APPLICATION



BRUSH  
APPLICATION



MOP  
APPLICATION



ROLLER  
APPLICATION



SPRAY  
APPLICATION



PUTTY KNIFE  
APPLICATION



SQUEEGEE  
APPLICATION



ABSORBENT  
CLOTH



WATERING  
CAN



TEMPERATURE  
STABILITY



MOVEMENT  
ACCOMMODATION



FIRE RETARDANT

# COLOURGUIDE

|         |                      |      |             |
|---------|----------------------|------|-------------|
| AL      | ALUMINIUM            | N/A  | NATURAL     |
| ANT     | ANTHRACITE           | O    | ORANGE      |
| B       | BLUE                 | O/WH | OFFWHITE    |
| BC      | BEECH                | OK   | OAK         |
| BG      | BEIGE                | N/A  | PALE GREEN  |
| BL      | BLACK                | N/A  | PALE YELLOW |
| BR      | BROWN                | PK   | PINK        |
| N/A     | BRINDLE              | PN   | PINE        |
| BU      | BUFF                 | R    | RED         |
| BZ      | BRONZE               | RW   | ROSEWOOD    |
| C       | CREAM                | SS   | SANDSTONE   |
| CH      | CHARCOAL             | ST   | STONE       |
| CL OR T | CLEAR OR TRANSLUCENT | N/A  | STRAW       |
| N/A     | DARK GREY            | TF   | TOFFEE      |
| GN      | GREEN                | TK   | TEAK        |
| GR      | GREY                 | WH   | WHITE       |
| IV      | IVORY                | Y    | YELLOW      |
| LS      | LIMESTONE            |      |             |

Note: Colours are for illustration purposes only and are not an exact reproduction of finished product.



**bond it**



**Drive Alive**  
revive your drive...

Unit G16, River Bank Way,  
Lowfields Business Park,  
Elland, West Yorkshire. HX5 9DN.

t: 01422 315300

f: 01422 315310

e: [sales@bond-it.co.uk](mailto:sales@bond-it.co.uk)

[www.bond-it.co.uk](http://www.bond-it.co.uk)

[www.yourdrivealive.co.uk](http://www.yourdrivealive.co.uk)



Find us on  
**Facebook**



@BondItUK