



Linoleum
xfTM2

LINOVILLE

Get Close
to Lino





Linoville is a visual expression of the qualities of linoleum that pull you into the world of linoleum and bring you closer to the product. With our large collection of designs, our xf² surface treatment and acoustic options, come and discover linoleum like you have never seen before.

Linoville... Get close to Lino!



LINOVILLE. Closer to Nature p.4

LINOVILLE. Closer to Colour p.5

Veneto p.6

Grands Classiques p.8

Style p.9

Etrusco p.10

LINOVILLE. Closer to Efficiency

xfTM surface treatment p.11

Cleaning
and maintenance p.13

TECHNICAL DATA p.14

RANGE OVERVIEW p.15-16

SURFACE FINISHING & ACCESSORIES p.17



LINOVILLE. Closer to Nature!

THE NATURAL CHOICE FOR PEOPLE AND THE ENVIRONMENT

Natural, versatile and sustainable. Combining over 100 years of tradition, craftsmanship and innovation, our linoleum offers a fresh approach to the flooring needs of today and lifestyles of tomorrow.

A TRADITIONAL FLOORING MADE IN ITALY

Our linoleum is made in Narni, Italy, with the same original recipe since 1898 and sold across the world. Tarkett's teams have an intimate understanding of the ingredients in order to adapt manufacturing to the variations of each year's crop.

- Every linoleum is seasoned for about 25 days, individually sampled by our experts to ensure that its natural characteristics are at their best.
- Our linoleum was the world's first to be certified Silver Cradle to Cradle® for its sustainable approach.

FOR A SUSTAINABLE FUTURE


Sustainability at Tarkett means developing quality of life solutions that benefit people and the planet over the long-term. We are committed to a circular economy where resources are continually reused and recycled - creating products today that become the raw materials of tomorrow. To get there we have adopted a closed loop circular design model, powered by **Cradle to Cradle®** principles. It helps us design products that contribute positively to the environment and people's well-being at every step of the product's life.

At Tarkett, our linoleum is an outstanding example of sustainable circular design:

- Environmentally-friendly ingredients, naturally bactericidal, with no added flame retardant.

- Single homogeneous construction giving greater resistance to wear and durability over time.
- Increased flexibility in handling and installing thanks to its cork ingredients.
- Naturally phthalate-free for a good indoor quality and low emission levels.

It demonstrates Tarkett's sustainable approach throughout - from how it's made in Narni to how people experience it across the world.



1805 400

100% linen

Our colour 100% linen is the **ONLY** linoleum awarded

C2C GOLD



AN EVERYDAY PRACTICE

At our Italian factory in Narni, thanks to a tri-generation system, we are able to produce, autonomously, 20% of electricity needs and 3% of heating and cooling power from a single device (a gas engine) with a significant reduction of energy purchase from external supplier and with a reduction of CO₂ eq. emissions, thus reinforcing our green performances to reach 2020 targets. The plant in Narni has been certified ISO 14067:2013 (Carbon Foot print) since 2014, and:

- vs 2010, we have reduced waste sent to landfill by **80%** - our objective is 0% waste by 2020
- **100%** of water needed for production is recycled, saving 80 million liters of water a year
- **17%** of the energy used is renewable, of which **9%** is internal production (biomass boiler, geothermal system and photovoltaic panels) and **8%** is external.





LINOVILLE. Closer to Colour!

Drawing on Tarkett's on-going trends analysis and colour expertise, we have created a rich collection of linoleum designs to meet the ambitions of any architectural project.

OPEN TO A WORLD OF COLOUR

Our ranges have been developed through consultation with architects across the world at every design phase. It has enabled Tarkett to perfect the right combination of colour, balance and structure for each design concept.

EXPLORING THE NEEDS OF TOMORROW

To anticipate how needs will change, our design teams explore emerging architectural, cultural and lifestyle trends. We share these insights in our Tarkett Observer studies that identify key orientations to enhance interior building design and user experience in healthcare, education and retail environments of the future.

TARKETT OBSERVER EDUCATION

In our latest trend analysis, we set out the fundamental contribution of colour and design in education. The colour universe of linoleum, in compact and acoustic solutions, can help create better learning environments from kindergarten, primary schools to university facilities.

OUR DESIGN ORIENTATIONS:

HUMAN INSIDE

- Creating social cohesion for a stimulating environment that improves focus and concentration.
- An environment that plays with graphic and colour codes to give meaning to each area.

INTERACTIVE SPACE

- Flexible and modular design to change perceptions of learning and stimulate creativity
- Tonic and bright colour range with materials and motifs that bring the present into the future.

GREEN VALUE

- Creating a first contact with eco-responsibility and integrating environmental awareness.
- Greens, browns and neutrals and materials that evoke Nature. Re-usability and recyclability.

TARKETT FLOORCRAFT

We offer a dedicated Floorcraft Service to create unique flooring concepts through highlighting visual inlays, colourways, zoning and directional design.




LINOVILLE. Closer to Colour!

VENETO a collection of strong and subtle marbled designs in soft or intense pattern variations for a timeless effect.


Our Veneto range includes:

- « 20 Grands Classiques* »: a selection of 20 timeless colours among the 72 Veneto, that are guaranteed to be in production until 2033. All colours are available in 7 different specifications and with Tarkett's multicolour welding rods xF² (more details on p.8).
- All shades of the colour spectrum in a combination of neutral and contemporary accents.

VENETO - GREY

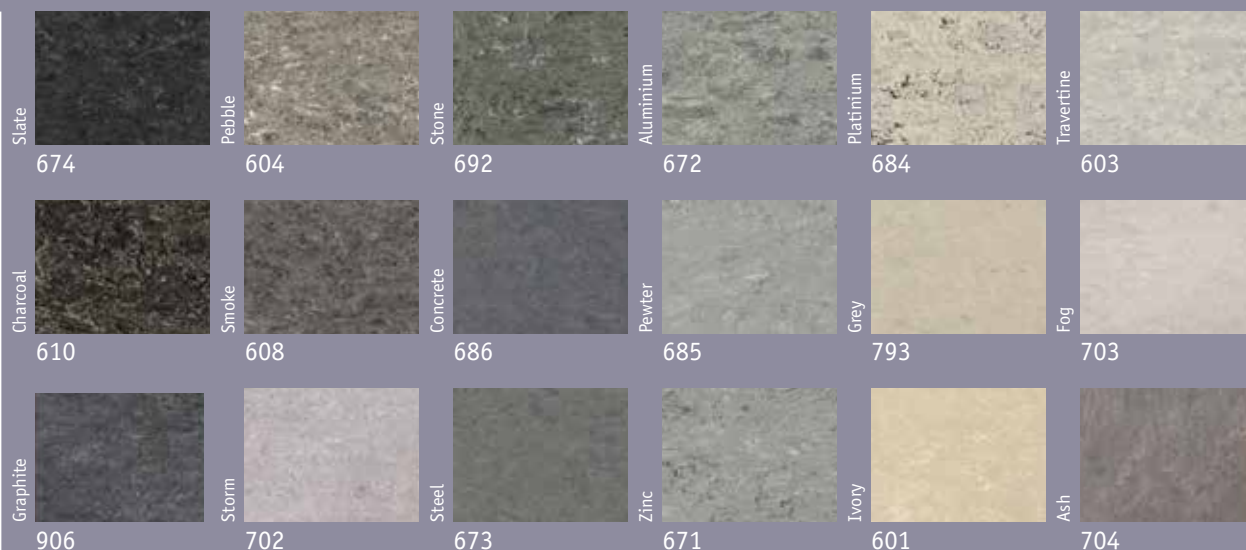

VENETO - BEIGE



*Eternal Classics



LINOVILLE. Closer to Comfort!

Customize your acoustic for comfort and well-being

LINOLEUM SILENCIO xf² - 18 dB

To reduce impact and ambient noise and enhance underfoot comfort and well-being, Tarkett's Silencio xf² offers an acoustic linoleum solution with sound reduction of 18 dB.

With a total thickness of 3.8mm, it's made in a two-layer construction of 2.5mm linoleum with a pre-bonded recycled foam underlay. Available in all design options.

LINOLEUM ACOUSTIC CORK xf² AND ESSENZA - 15 dB

The natural acoustic option, easy to install and to live with, is offered on demand in the following options:

a) Veneto xf² and Veneto Essenza: 2.5 mm linoleum with jute backing and Elafono cork underlayer

b) Veneto xf²: 2mm linoleum with jute backing and Elafono cork underlayer.


c) Style Emme xf²: 2.5 mm linoleum with jute backing and Elafono cork underlayer

These ready-to-install natural solutions provide a good acoustic insulation of 15 dB – the best in the market with similar products - as well as high resistance to indentation.


ELAFONO – up to 15 dB

To increase acoustic absorption, Tarkett also offers Elafono – a 2mm 100% natural corkment underlay with a sound insulation up to 15 dB, depending on the thickness – that can be installed in combination with any compact linoleum flooring.


VENETO - BLUE

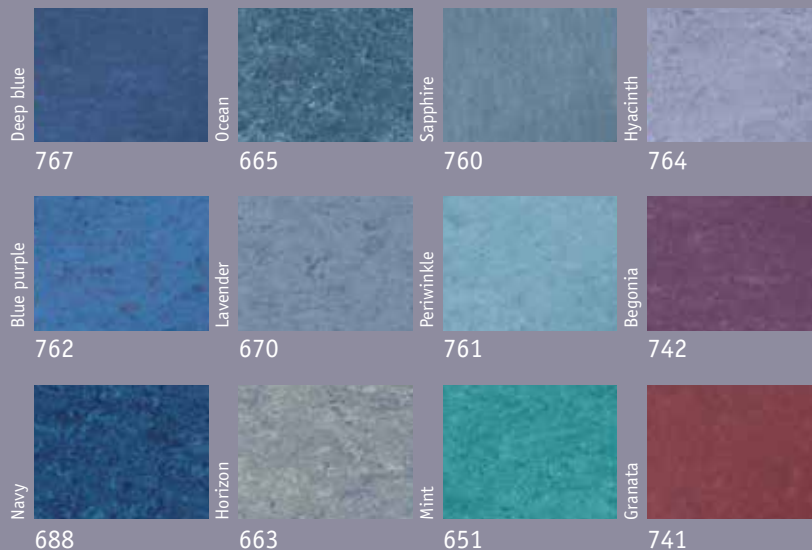

VENETO - GREEN

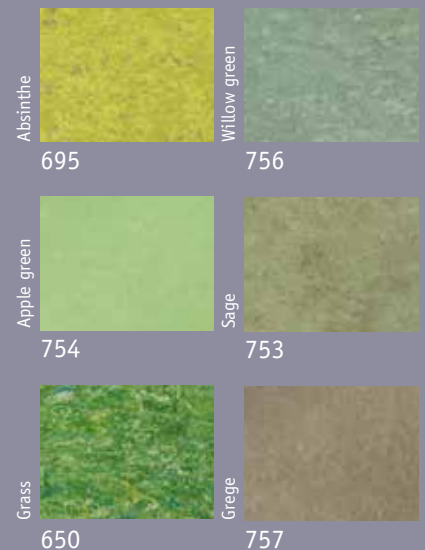

VENETO - RED

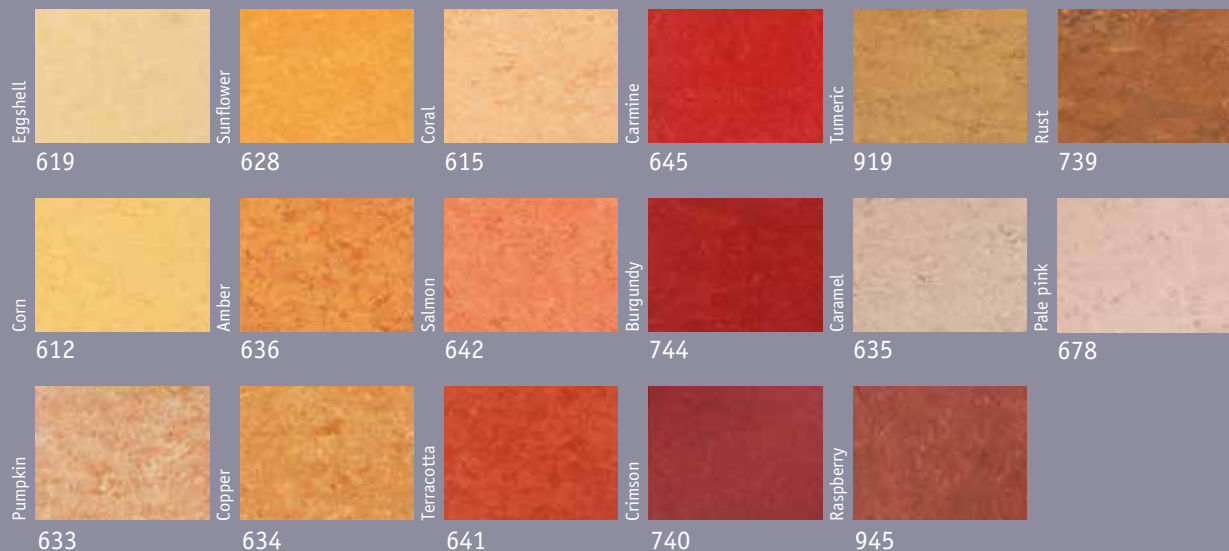


LINOVILLE. Closer to Colour!

GRANDS CLASSIQUES* a selection of 20 timeless colours that we guarantee in production until 2033.

20 colours are available in 7 different levels of traffic resistance with xf² surface treatment, and can be matched with our new range of multicolour welding rods for a perfect finish. This includes Sicuro R10 anti-slip and Essenza non-permanent surface finish. Grand Classiques designs are also available in acoustic option: Silencio 18 dB and Acoustic Cork 15 dB.

- 2.0mm xf²
- 2.5mm xf²
- 2,5mm Essenza
- 2,5mm xf² R10 slip resistant rating
- 3.2mm xf²
- Silencio xf² 18 dB
- Acoustic Cork xf² & Essenza 15 dB

GRANDS CLASSIQUES*	Ecrû		Sisal		Grey		Steel		Amber	
		711		611		793		673		636
	Camel		Zinc		Storm		Smoke		Terracotta	
		616		671		702		608		641
Horizon		663	Cork		Aluminium		Charcoal		Grass	
				679		672		610		650
Neutral		710	Corn		Pebble		Slate		Graphite	
				612		604		674		906

MULTICOLOUR WELDING RODS

For a virtually seamless finish, Tarkett has developed a new range of multicolour welding rods, designed to match the colour spectrum of our linoleum collection for the **Grands Classiques** colours. By including contrasting particles coordinated with the flooring's accent colour and design, they enable architects to achieve a continuous flowing flooring design. Now even easier and quicker to integrate, they can reduce installation time.



Plain welding rods versus Multicolour welding rods

STYLE a design range where the natural patterned beauty of linoleum meets modern style.

It's a subtle mix between contemporary colours and light marbled surfaces. Colours encompass cool and warm greys, shades of beige and brown, classic black and white, with vivid accent colours in red, green, yellow, orange and blue.



**SILENCIO xf²,
ACOUSTIC CORK xf²
& ESSENZA.**

We offer SILENCIO xf², ACOUSTIC CORK xf² and ESSENZA acoustic options with greater sound reduction and thermal insulation available across all Tarkett linoleum colour designs.

STYLE EMME a subtle marbling for refined and sophisticated styling.

STYLE ELLE a discrete directional linear design.

BEIGE & BROWN

STYLE EMME 208	STYLE ELLE 308
Sabbia	Sabbia
Mokka	Mokka
STYLE EMME 217	STYLE ELLE 317

COOL GREYS

STYLE EMME 205	STYLE ELLE 305
Ferro	Ferro
Cemento	Asfalto
STYLE EMME 202	STYLE EMME 207

BLACK & WHITE

STYLE EMME 200	STYLE ELLE 300
Materia	Materia
Abisso	Abisso
STYLE EMME 209	STYLE ELLE 309

WARM GREYS

STYLE EMME 203	STYLE ELLE 303
Velluto	Velluto
Cenere	Vulcano
STYLE EMME 201	STYLE EMME 216

VIVID ACCENTS

STYLE EMME 218	STYLE ELLE 318
Arancione	Arancione
Giallo	Giallo
STYLE EMME 219	STYLE ELLE 319

VIVID ACCENTS

STYLE EMME 214	STYLE ELLE 314
Rosso	Rosso
Verde	Verde
STYLE EMME 215	STYLE ELLE 315
Blue	Blue
STYLE EMME 220	STYLE ELLE 320

LINOVILLE. Closer to Colour!

ETRUSCO a contemporary linoleum range featuring fourteen deep and radiant colours.

Thanks to its deep colours and plain design, Etrusco xf² can be combined easily with any other type of pattern or used alone, for great design effects.



SILENCIO xf².

We offer acoustic options with greater sound reduction and thermal insulation available across all Tarkett linoleum colour designs.

ETRUSCO	Black	098	Silver	003	Beige	002	Red Berlin	094	
	Red	041	Orange	037	Yellow	036	Anise	095	Rainforest
	Indigo	066	Cyan	061	Emerald	054	Iris	048	Anaranth
								042	





LINOVILLE. Closer to Efficiency!

A HARD-WEARING SOLUTION OVER ITS LIFETIME

For 150 years, linoleum flooring has been appreciated for its natural beauty, comfort, durability and versatility in most interior environments. Tarkett was an early innovator in surface treatments – adding xf² technology to its linoleum to improve resistance and simplify maintenance for significant cost savings in daily cleaning and care.

xf² for improved performance

Now, Tarkett is introducing xf² - its second generation surface treatment - increasing resistance for even longer durability and reducing maintenance for a highly cost-effective flooring.

- Micro-reinforced polyurethane UV treatment that seals and hardens the surface to make it more resistant to dirt and daily wear and tear.
- A smooth matt appearance that prevents accumulation of dirt or stains.
- No need for polish, stripping and polymer waxing over the lifetime of the surface*.

Superior resistance to abrasion

No other linoleum is as resistant to abrasion. We have conducted extensive internal and external laboratory testing to evaluate the resistance of xf² linoleum to abrasion over time. With the help of an electron microscope and 3D surface profilometer we are now able to see, magnified, the proof of the unbeatable resistance of xf². Tests were done on Competitors A, B and Tarkett samples, before and after dry abrasion by a rotation tumbler machine equipped with black pads. All linoleum are PU UV coated, following producers declarations. After 30 minutes, the test machine began to degrade the finish of Competitors' Samples A and B. Tarkett's test continued for one hour without visible finish degradation.

Resistance of xf² welding rods

The new formula developed by Tarkett enables us to produce welding rods – both multicolour and traditional unicolour - that offer exceptional resistance to all kinds of soiling and abrasion.



Competitor A, before abrasion



Competitor A, after abrasion



Competitor B, before abrasion



Competitor B, after abrasion



Tarkett xf², before abrasion



Tarkett xf², after abrasion

Source: university of Terri

After abrasion competitor A and B are destroyed when Tarkett xf² is still intact.

* Providing soil barriers are correctly put in place, regular maintenance is operated (daily vacuuming and mopping), furniture have appropriate leg coverings and daily surveillance.

LINOVILLE. Closer to Efficiency!

In addition to optimal durability and wear and tear resistance, Tarkett's new xf² surface treatment ensures an outstanding performance against soiling, staining to improve hygiene and simplify cleaning and maintenance. And we set out to prove it.

INHIBITING BACTERIAL GROWTH

Flooring contributes to ensuring hygienic environments in public buildings – from schools to hospitals where stain resistance to medical chemicals is mandatory for flooring materials.

Linoleum xf², with its sealed smooth surface, inbuilt resistance and naturally bactericidal qualities, can offer an effective solution.

REDUCED LIFE CYCLE COST FOR LINOLEUM xf²

The cost of the initial investment and installation normally represents just a small part of flooring's total life cycle cost. The rest is cleaning and maintenance. As the Linoleum xf² doesn't require first surface treatment after installation, neither regular wax or polish maintenance during its lifetime, consumption of water and detergent decrease significantly and give Linoleum xf² a very favorable life cycle cost.

Compared with Linoleum flooring treated with a non-permanent acrylic finish, payback on the extra investment could come within 2 months*.

For more information, please contact your Tarkett representative.

**Case study: Classrooms of 1,300m², comparison between untreated Linoleum and Linoleum Xf². For 20 years life time, respecting cleaning and maintenance recommendations: entrance matting, regular cleaning, etc.*

Savings:

- 3.7% of water saved
- 25% less detergent
- 8.9% less electricity power
- 3.8% less manpower

SIMPLIFYING CLEANING AND MAINTENANCE

The reinforced surface of linoleum xf² means no polish, stripping and polymer waxing over the lifetime of the product**. As a result, it requires less frequent, less intense cleaning and maintenance and reduces use of water, energy and chemical detergents for a better environment footprint.



*** Providing soil barriers are correctly put in place, regular maintenance is operated (daily vacuuming and mopping), furniture have appropriate leg coverings and daily surveillance.*

CLEANING AND MAINTENANCE: NO POLISH, NO STRIPPING, NO WAX NEEDED*

Modern day-room cleaning aims to reduce wet cleaning procedures and replace them with drier cleaning techniques. For example, the use of centrally laundered pre-impregnated mops and the wide application of appropriate machines. This makes work more effective and easier for the cleaning staff, and minimizes environmental impact. Less cleaning chemicals and less fresh water are used.

1 Initial site cleaning



After installation initial site clean is required: vacuum, sweep or damp mop the area to remove building dust and loose dirt. A combined scrubber/dryer with brushes or red pads cleans large areas very effectively. Use detergent with a low pH (3-5).

xfz will be not removed by any cleaning operation.



2 Daily and regular cleaning



Remove dust and dirt with yarn or microfiber mops or disposable mops, dry or impregnated or vacuum the floor.



Use a mop dampened with water or detergent solution to remove spots. It is essential that water does not stay on the floor or leave a film. The floor should be virtually dry after 15-20 seconds. If required spray clean the floor with a rotary machine and red pad.

3 Periodic cleaning



Combined machine

Use diluted neutral detergent. Speed low 150-250 rpm or higher. Red/brown pads are usually most suitable.

or



+



+



Machine scrubbing + Wet vacuuming + Dry buffing

- Apply a cleaning solution (fairly strong, pH 10-11, after dilution) and allow to act for 5-10 min.
- Clean the floor using a heavy-duty single disc scrubbing machine (red pad).
- Vacuum up the dirty water immediately.
- Rinse with clean water and allow the floor to dry.
- If necessary dry buff (red pad) to restore gloss. Suitable speed: 500-1000 rpm.

Sharp edged /not maintained furniture feet, sand, pebbles, permanent push and drive movements on the same area will damage every kind of flooring over the time.

TRAINING

We provide a range of on-demand training for distributors, installers and maintenance teams on Tarkett products, installation and maintenance techniques as well as individual installation of key products for demonstration and discussion with customers.

We can deliver these worldwide in our own training facilities, such as the Tarkett Studio facility near Paris, or at customer sites. Our international technical advisers can also provide personalised training or support at the start of installation on building projects.

For more information about installation training or on-site assistance in your area, contact your Tarkett representative.

* Providing soil barriers are correctly put in place, regular maintenance is operated (daily vacuuming and mopping), furniture have appropriate leg coverings and daily surveillance.

Specification

Linoleum homogeneous floorcovering made by one single layer calandered on jute backing. Composition: linseed oil, wood and cork flour, natural resins, pigments. Product standard: EN ISO 24011.

GARANTEE
10 YEARS

CERTIFICATION & CLASSIFICATION	STANDARDS	Veneto xf ² 2 mm	Veneto xf ² - Veneto xf ² B ₁ - Style Emme xf ² - Style Elle xf ² Veneto Essenza 2.5 mm	Veneto xf ² 3.2 mm	Veneto Sicuro xf ² 2.5 mm	Silencio xf ² 3.8 mm	Veneto Acoustic Cork xf ² 4.0 mm	Veneto Acoustic Cork xf ² Style Emme Acoustic Cork xf ² 4.4 mm	Etrusco xf ² 2.5 mm	Linoleum Conductive xf ² 2.5 mm	Linoleum SD Static Dissipative xf ² 2.5 mm
Type of floorcovering	EN 686 EN 687	-	-	-	-	Linoleum on a foam backing	-	-	-	-	-
CE Certification	EN 14041	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Classification	EN ISO 10874 Domestic Commercial Light Industrial	Classes: 23 32 41	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 33 41	Classes: 23 33 41	Classes: 23 34 42	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 34 43
TECHNICAL CHARACTERISTICS	STANDARDS										
Surface Treatment		xf ²	xf ² (acrylic Essenza)	xf ²	xf ²	xf ²	xf ²	xf ² (acrylic Essenza)	xf ²	xf ²	xf ²
Total thickness	EN ISO 24346	2.0 mm	2.5 mm	3.2 mm	2.5 mm	3.8 mm	4.0 mm	4.4 mm	2.5 mm	2.5 mm	2.5 mm
Total weight	EN ISO 23997	ca. 2 400 g/m ²	ca. 3 000 g/m ²	ca. 3 900 g/m ²	ca. 3 000 g/m ²	ca. 3 450 g/m ²	ca. 4 100 g/m ²	ca. 4 600 g/m ²	ca. 3 000 g/m ²	ca. 3 000 g/m ²	ca. 3 000 g/m ²
Residual indentation	EN ISO 24343-1	ca. 0.07 mm	ca. 0.08 mm	ca. 0.10 mm	ca. 0.08 mm	≤ 0.20 mm	≤ 0.25 mm	≤ 0.25 mm	ca. 0.08 mm	ca. 0.08 mm	ca. 0.08 mm
Flexibility	EN ISO 24344 Method A	≤ 25 mm Ø	≤ 30 mm Ø	≤ 40 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø
Form of delivery	EN ISO 24341	≤ 30 x 2 m	≤ 30 x 2 m	≤ 30 x 2 m	≤ 30 x 2 m	≤ 27 x 2 m or ≤ 27 x 1.95 m (subject to availability-please check upon order)	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 x 2 m	≤ 30 x 2 m	≤ 30 x 2 m
TECHNICAL PERFORMANCES	STANDARDS										
Fire classification	EN 13501-1	Gr s1	Gr s1 (B ₁ s1 for Veneto xf ² B ₁)	Gr s1	Gr s1	Gr s1	Gr s1	Gr s1	Gr s1	Gr s1	Gr s1
Impact sound reduction	EN ISO 10140-3 EN ISO 717-2	5 dB	6 dB	8 dB	6 dB	18 dB	15 dB	15 dB	6 dB	6 dB	6 dB
Impact sound in the room	NF S31-074	Class C < 85 dB	Class C < 85 dB	Class B < 75 dB	Class C < 85 dB	Class A < 65 dB	Class B < 75 dB	Class B < 75 dB	Class C < 85 dB	Class C < 85 dB	Class C < 85 dB
Impact sound reduction with Elafono*	EN ISO 140-8 EN ISO 717-2	14 dB	14 dB	15 dB	14 dB	Not applicable	Not applicable	Not applicable	14 dB	Not applicable	Not applicable
Castor chair	EN ISO 4918	Suitable for office chairs with castors type W (Norm EN 12529)									
Static electrical propensity	EN 1815	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV
Electrical resistance	EN 1081	-	-	-	-	-	-	-	-	R ₁ ≤ 10 ⁸ Ω R ₂ ≤ 10 ⁸ Ω R ≤ 10 ⁸ Ω R ≤ 10 ⁸ Ω	R ₁ ≤ 10 ⁸ Ω R ₂ ≤ 10 ⁸ Ω 1x10 ⁴ < R < 1x10 ⁸ Ω R ≤ 10 ⁸ Ω
ESD-approval SP method 2472 EN/IEC 61340-4-1		-	-	-	-	-	-	-	-	-	-
Slip resistance	EN 13893 DIN 51130	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R10	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9
Chemical resistance	EN ISO 26987	Resistant to dilute acids, oils, fats, current solvents and alkalis									
Thermal resistance	EN ISO 10456	0.012 m ² K/W Suitable	0.015 m ² K/W Suitable	0.019 m ² K/W Suitable	0.015 m ² K/W Suitable	0.040 m ² K/W Suitable	0.042 m ² K/W Suitable	0.045 m ² K/W Suitable	0.015 m ² K/W Suitable	0.015 m ² K/W Suitable	0.015 m ² K/W Suitable
Underfloor heating											
Light fastness	EN ISO 105-B02 Method 3	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Determination of antibacterial activity	EN ISO 22196	Naturally bactericidal									
Colours		20	72 (Veneto) - 10 (Veneto xf ² B ₁) 30 (Essenza) - 15 (Style Elle) 11 (Style Elle)	20	29	72 (Veneto) 15 (Style Emme) 11 (Style Elle) 14 (Etrusco)	20 on request	on request: 72 (Veneto) 30 (Essenza) 15 (Style Emme)	14	1	4


The above information is subject to modification for the benefit of further improvement. (11/15).

DISCLAIMER: Although the utmost care is taken, the data here given could differ and be subject to modifications from a technical point of view.

In its strive to improve its floor solutions, Tarkett reserves the right to modify its technical specifications, colours and materials at any moment and without prior notice. Please, check the effective availability of the products presented at the time of order. Due to the technical limits of reproduction and printing techniques used, the appearance (colour) of the product may vary from the samples, panels or other visual display materials exhibited to the customer. It is mandatory to have the products installed properly if they are to service correctly and safely. Refer to Tarkett technical installation and maintenance directions, available at www.tarkett.com or at your Tarkett dealer.

*Elafono: 2,0mm traditional, 100% natural corkment underlay to be installed in combination with any compact Tarkett Linoleum to get additional sound reduction (up to 15dB, depending on the product). Available in rolls ≤30 x 2m.

CUSTOMS TARIFF : 48205000000F

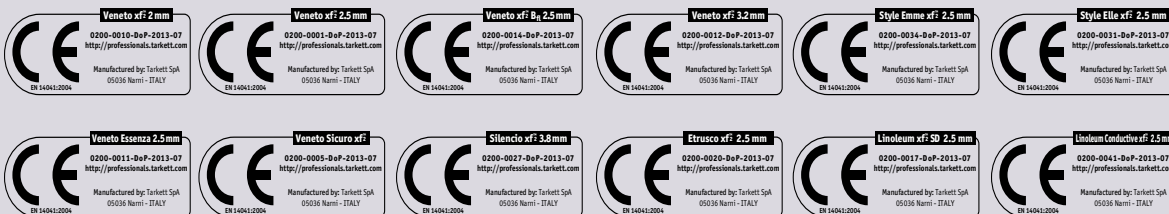

Veneto	94% 76%	100% 36%	PHthalate FREE	Better Indoor Air Quality	Etrusco	93% 77%	100% 34%	PHthalate FREE	Better Indoor Air Quality	Style	96% 74%	100% 30%	PHthalate FREE	Better Indoor Air Quality	Elafono	100% 85%	100% 34%	PHthalate FREE	Better Indoor Air Quality
SD	98% 58%	100% 18%	PHthalate FREE	Better Indoor Air Quality	Conductive	96% 58%	100% 18%	PHthalate FREE	Better Indoor Air Quality	Silencio	83% 65%	100% 40%	PHthalate FREE	Better Indoor Air Quality	Acoustic Cork	93% 77%	100% 33%	PHthalate FREE	Better Indoor Air Quality

RANGE OVERVIEW


	Colour name	Ref	2,0 mm	2,5 mm	3,2 mm	Silencio 3,8 mm	Essenza 2,5 mm	Sicuro xF [®] R10 2,5 mm	Veneto xF [®] Bf 2,5 mm	Acoustic Cork xF [®] 15 dB 4 mm	Acoustic Cork xF [®] 15 dB 4,4 mm	Acoustic Cork Essenza 15 dB 4,4 mm	20 Grands Classiques	NCS code Linoleum	Unicolour welding rod	NCS code Unicolour welding rod	NCS Unicolour welding rod	Multicolour welding rod
VENETO	Durango	121		14872121		14892121					14881121			S3010-Y30R	1751121	S3010-Y10R		
	100% linen	400		14872400		14892400	1805400				14881400	14882400		S4020-Y30R	1751400	S4020-Y30R		
	Fossil	502		14872502		14892502					14881502			S4010-Y10R	1751502	S5010-Y10R		
	Tiger eye	524		14872524		14892524			14898524		14881524			S7020-Y40R	1751524	S7010-Y30R		
	Ivory	601		14872601		14892601					14881601			S2005-Y10R	1751601	S2010-Y10R		
	Travertine	603		14872603		14892603					14881603			S2502-G	1751603	S3005-G80Y		
	Pebble	604	14871604	14872604	14873604	14892604	1805604	1863604		14880604	14881604	14882604	•	S5502-Y	1751604	S5502-Y		14000604
	Smoke	608	14871608	14872608	14873608	14892608	1805608	1863608		14880608	14881608	14882608	•	S6502-Y	1751608	S6005-G80Y		14000608
	Charcoal	610	14871610	14872610	14873610	14892610	1805610	1863610		14880610	14881610	14882610	•	S8000-N	1751610	S8502-B		14000610
	Sisal	611	14871611	14872611	14873611	14892611	1805611	1863611		14880611	14881611	14882611	•	S2020-Y20R	1751313	S2020-Y10R		14000611
	Corn	612	14871612	14872612	14873612	14892612	1805612	1863612		14880612	14881612	14882612	•	S2040-Y10R	1751612	S1040-Y10R		14000612
	Coral	615		14872615		14892615					14881615			S2030-Y40R	1751615	S2020-Y30R		
	Camel	616	14871616	14872616	14873616	14892616	1805616	1863616		14880616	14881616	14882616	•	Y1020-Y30R	1751313	S2020-Y10R		14000616
	Eggshell	619		14872619		14892619	1805619	1863619			14881619	14882619		S1020-Y20R	1751619	S2020-Y10R		
	Sand	622		14872622		14892622					14881622			S2010-Y10R	1751119	S2010-Y20R		
	Azurite	624		14872624		14892624					14881624			S1515-Y20R	1751679	S2020-Y10R		
	Silk	625		14872625		14892625					14881625			S3010-Y30R	1751625	S3010-Y		
	Sunflower	628		14872628		14892628	1805628	1863628			14881628	14882628		S1070-Y20R	1751628	S1060-Y10R		
	Citrine	631		14872631		14892631					14881631			S2030-Y30R	1751631	S3020-Y30R		
	Chocolate	632		14872632		14892632					14881632			S7005-Y80R	1751632	S7005-Y80R		
	Pumpkin	633		14872633		14892633					14881633			S2030-Y50R	1751633	S3040-Y30R		
	Copper	634		14872634		14892634					14881634			S2040-Y40R	1751634	S3040-Y30R		
	Caramel	635		14872635		14892635					14881635			S2010-Y60R	1751635	S2020-Y40R		
	Amber	636	14871636	14872636	14873636	14892636	1805636	1863636	14898636	14880636	14881636	14882636	•	S2050-Y40R	1751636	S2060-Y30R		14000636
	Almond	637		14872637		14892637					14881637			S3005-Y50R	1751637	S3010-Y10R		
	Terracotta	641	14871641	14872641	14873641	14892641	1805641	1863641		14880641	14881641	14882641	•	S2070-Y80R	1751641	S3060-Y80R		14000641
	Salmon	642		14872642		14892642					14881642			S2050-Y60R	1751642	S2040-Y60R		
	Carmine	645		14872645		14892645					14881645			S1580-Y90R	1751645	S2070-Y90R		
	Grass	650	14871650	14872650	14873650	14892650	1805650	1863650		14880650	14881650	14882650	•	S4040-G30Y	1751650	S3050-G20Y		14000650
	Mint	651		14872651		14892651					14881651			S3040-B40G	1751651	S3040-B40G		
	Horizon	663	14871663	14872663	14873663	14892663	1805663	1863663		14880663	14881663	14882663	•	S4010-R90B	1751660	S4005-R80B		14000663
	Ocean	665		14872665		14892665	1805665	1863665			14881665	14882665		S5030-R90B	1751665	S5030-R90B		
	Lavender	670		14872670		14892670	1805670	1863670			14881670	14882670		S4020-R90B	1751670	S4020-R80B		
	Zinc	671	14871671	14872671	14873671	14892671	1805671	1863671		14880671	14881671	14882671	•	S4502-Y	1751671	S4502-G		14000671
	Aluminium	672	14871672	14872672	14873672	14892672	1805672	1863672		14880672	14881672	14882672	•	S4502-G	1751672	S4502-G		14000672
	Steel	673	14871673	14872673	14873673	14892673	1805673	1863673	14898673	14880673	14881673	14882673	•	S6000-N	1751673	S6005-B20G		14000673
	Slate	674	14871674	14872674	14873674	14892674	1805674	1863674	14898674	14880674	14881674	14882674	•	S8502-B	1751674	S8502-B		14000674
	Pale pink	678		14872678		14892678					14881678			S1515-Y70R	1751678	S2010-Y50R		
	Cork	679	14871679	14872679	14873679	14892679	1805679	1863679		14880679	14881679	14882679	•	S2020-Y20R	1751679	S2020-Y10R		14000679
	Platinum	684		14872684		14892684					14881684			S2502-Y	1751684	S3005-G80Y		
	Pewter	685		14872685		14892685					14881685			S4000-N	1751685	S3502-B		
	Concrete	686		14872686		14892686					14881686			S6005-R80B	1751686	S6005-B20G		
	Navy	688		14872688		14892688			14898688		14881688			S6030-R80B	1751068	S5030-R80B		
	Stone	692		14872692		14892692					14881692			S6502-G	1751692	S5502-G		
	Absinthe	695		14872695		14892695	1805695	1863695	14898695		14881695	14882695		S3040-G80Y	1751695	S2050-G60Y		
	White	700		14872700		14892700					14881700			S1005-Y20R	1751700	S2010-Y10R		
	Storm	702	14871702	14872702	14873702	14892702	1805702	1863702		14880702	14881702	14882702	•	S3502-Y	1751202	S4502-Y		14000702
	Fog	703		14872703		14892703					14881703			S4502-Y	1751703	S4502-Y		
	Ash	704		14872704		14892704			14898704		14881704			S5502-Y	1751907	S6500-N		
	Neutral	710	14871710	14872710	14873710	14892710	1805710	1863710		14880710	14881710	14882710	•	S2020-Y20R	1751679	S3010-Y10R		14000710
	Ecru	711	14871711	14872711	14873711	14892711	1805711	1863711	14898711	14880711	14881711	14882711	•	S2010-Y20R	1751679	S2020-Y10R		14000711
	Sandstorm	712		14872712		14892712					14881712			S2020-Y30R	1751313	S2020-Y10R		
	Taupe dark	714		14872714		14892714					14881714			S4005-Y20R	1751203	S5005-Y20R		
	Rust	739		14872739		14892739					14881739			S3050-Y50R	1751739	S4030-Y40R		
	Crimson	740		14872740		14892740			14898740		14881740			S3060-R	1751740	S3060-R		
	Granata	741		14872741		14892741					14881741			S5030-R20B	1751094	S6030-R		
	Begonia	742		14872742		14892742					14881742			S6030-R50B	1751049	S7020-R40B		

		Colour name	Ref	2,0 mm	2,5 mm	3,2 mm	Silencio 3,8 mm	Essenza 2,5 mm	Sicuro xF7 R10 2,5 mm	Veneto xF7 BF 2,5 mm	Acoustic Cork xF7 15 dB 4 mm	Acoustic Cork xF7 15 dB 4,4 mm	Acoustic Cork Essenza 15 dB 4,4 mm	20 Grands Classiques	NCS code Linoleum	Unicolour welding rod	NCS code Unicolour welding rod	NCS Unicolour welding rod	Multicolour welding rod
VENETO		Burgundy	744		14872744		14892744					14881744			S53060-R	1751744	S3060-Y90R		
		Sage	753		14872753		14892753	1805753	1863753			14881753	14882753		S3020-G40Y	1751753	S3030-G40Y		
		Apple green	754		14872754		14892754	1805754	1863754			14881754	14882754		S2050-G40Y	1751754	S3040-G40Y		
		Willow green	756		14872756		14892756					14881756			S5020-G10Y	1751756	S4020-G30Y		
		Grege	757		14872757		14892757					14881757			S6010-G70Y	1751757	S6020-G70Y		
		Sapphire	760		14872760		14892760					14881760			S4020-R90B	1751670	S5010-B70G		
		Periwinkle	761		14872761		14892761					14881761			S3030-B10G	1751761	S4030-B30G		
		Blue purple	762		14872762		14892762					14881762			S5040-R90B	1751665	S5030-R90B		
		Hyacinth	764		14872764		14892764					14881764			-	1751764	S4020-R70B		
		Deep blue	767		14872767		14892767	1805767	1863767			14881767	14882767		S6020-R90B	1751681	S6020-R80B		
		Grey	793	14871793	14872793	14873793	14892793	1805793	1863793	14898793	14880793	14881793	14882793		S2502-Y	1751793	S3005-G80Y		14000793
		Graphite	906	14871906	14872906	14873906	14892906	1805906	1863906		14880906	14881906	14882906		S7500-N	1751906	S6005-B20G		14000906
		Burlap	911		14872911		14892911					14881911			S2005-Y40R	1751625	S3040-Y20R		
		Tumeric	919		14872919		14892919					14881919			S3050-Y20R	1751919	S3040-Y20R		
STYLE EMME		Raspberry	945		14872945		14892945	1805945	1863945			14881945	14882945		S4040-Y90R	1751945	S4040-Y80R		
		Materia	200		14835200		14782200					14102200			S1505 Y10R	1751200	S2010-Y		
		Cenere	201		14835201		14782201					14102201			S3005 Y20R	1751201	S3010-Y20R		
		Cemento	202		14835202		14782202					14102202			S3502 Y	1751202	S4502-Y		
		Velluto	203		14835203		14782203					14102203			S5005 Y20R	1751203	S5005-Y20R		
		Ferro	205		14835205		14782205					14102205			S5502 Y	1751205	S6005-G80Y		
		Asfalto	207		14835207		14782207					14102207			S6502 G	1751207	S7005-G50Y		
		Sabbia	208		14835208		14782208					14102208			S1515 Y30R	1751313	S2020-Y10R		
		Abisso	209		14835209		14782209					14102209			S8500 N	1751209	S8505-B20G		
		Rosso	214		14835214		14782214					14102214			S1080 Y90R	1751214	S2070-Y90R		
		Verde	215		14835215		14782215					14102215			S2060 G60Y	1751215	S3060-G70Y		
		Vulcano	216		14835216		14782216					14102216			S7005 Y20R	1751216	S7010-G90Y		
		Mokka	217		14835217		14782217					14102217			S7005 Y50R	1751621	S7005-Y20R		
		Arancione	218		14835218		14782218					14102218			S1070-Y70R	1751037	S2060-Y60R		
STYLE ELLE		Giallo	219		14835219		14782219					14102219			S1050-Y10R	1751219	S2050-Y		
		Blue	220		14835220		14782220					14102220			S7020-R80B	1751220	S7020-R90B		
		Materia	300		14825300		14783300								S1505 Y10R	1751300	S2010-Y		
		Velluto	303		14825303		14783303								S5005 Y20R	1751303	S5005-Y20R		
		Ferro	305		14825305		14783305								S5502 Y	1751205	S6005-G80Y		
		Sabbia	308		14825308		14783308								S1515 Y30R	1751313	S2020-Y10R		
		Abisso	309		14825309		14783309								S8500 N	1751309	S9000-N		
		Rosso	314		14825314		14783314								S1080 Y90R	1751214	S2070-Y90R		
		Verde	315		14825315		14783315								S2060 G60Y	1751215	S3060-G70Y		
		Mokka	317		14825317		14783317								S7005 Y50R	1751621	S7005-Y20R		
		Arancione	318		14825318		14783318								S1070-Y70R	1751037	S2060-Y60R		
		Giallo	319		14825319		14783319								S1050-Y10R	1751219	S2050-Y		
		Blue	320		14825320		14783320								S7020-R80B	1751220	S7020-R90B		
ETRUSCO		Beige	002		14877002		14894002								S3010-G90Y	1751002	S3010-G70Y		
		Silver	003		14877003		14894003								S4502-B	1751013	S5000-N		
		Yellow	036		14877036		14894036								S2040-Y10R	1751036	S1050-Y10R		
		Orange	037		14877037		14894037								S2070-Y50R	1751037	S2060-Y60R		
		Red	041		14877041		14894041								S2070-Y90R	1751041	S2070-Y90R		
		Amaranth	042		14877042		14894042								S1080-R	1751744	S3060-Y90R		
		Iris	048		14877048		14894048								S5030-R60B	1751048	S5030-R60B		
		Rainforest	053		14877053		14894053								S3050-G30Y	1751053	S3050-G30Y		
		Emerald	054		14877054		14894054								S3040-B40G	1751054	S4040-B50G		
		Cyan	061		14877061		14894061								S3050-B	1751061	S3040-B		
		Indigo	066		14877066		14894066								S7020-R70B	1751066	S7020-R70B		
		Red berin	094		14877094		14894094								S6030-Y90R	1751094	S6030-R		
		Anise	095		14877095		14894095								S2040-G50Y	1751095	S2060-G50Y		
		Black	098		14877098		14894098								S8502-B	1751098	S8502-B		
STATIC DISSIPATIVE		Dark grey	808		14995808										S8000-N	1751674	S8502-B		
		Abisso	809		14995809										S9000-N	1751209	S8505-B20G		
		Cocoa	824		14995824										S8502-Y	1751216	S7010-G90Y		
		Plumb	892		14995892										S6502-G	1751692	S5502-G		
CONDUCTIVE		Dark Grey	808		14991808										S8000-N	1751674	S8502-B		

TECHNICAL SOLUTIONS

SD STATIC DISSIPATIVE xf²

A safe, sustainable flooring designed for static control near computer, electronic and telecommunications equipment in medical, manufacturing, education and industry environments. Available in rolls and cuts for raised floors.

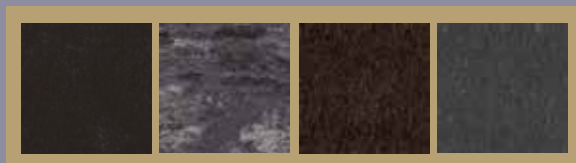

CONDUCTIVE xf² THE ONLY CONDUCTIVE LINOLEUM

A safe and sustainable flooring designed for a stable and reliable conductive control. The natural solution for education, healthcare and office environments, especially for areas like server and computer rooms, laboratory and electronic equipment in operating theatres. Available in rolls and cuts for raised floors.

VENETO SICURO xf² R10

R10 slip resistant rating: combines the need for a secure grip with the ease of cleaning of xf². Ideal for building entrances. Available in rolls and cuts for raised floors.

VENETO B_{fl} xf²

2.5mm Linoleum B_{fl} fire rating, without flame retardants. Bfl by its natural ingredients. Ideal for escaping areas. Available in rolls and cuts for raised floors.

VENETO ESSENZA

The traditional factory-applied non-permanent finish, PU free.

SILENCIO xf²

2.5 mm linoleum with jute backing and recycled polyurethane foam underlayer, giving an excellent sound reduction of 18 dB.

Silencio is available on all colors and designs. Available in rolls and cuts for raised floors.

ACOUSTIC CORK xf² / ESSENZA

2 or 2.5 mm linoleum and natural Elafono (cork underlayer) giving an excellent sound reduction of 15 dB, the best in the market with similar products, as well as a high resistance to indentation.

Product on demand in the following options:

- a) Veneto xf² and Essenza: 2.5 mm linoleum with jute backing and Elafono cork underlayer
 - b) Veneto xf²: 2mm linoleum with jute backing and Elafono cork underlayer.
 - c) Style Emme xf²: 2.5 mm linoleum with jute backing and Elafono cork underlayer
- Available in rolls and cuts for raised floors.

ELAFONO

2.0 mm traditional, 100% natural, corkment underlay to be installed in combination with any compact Tarkett linoleum to get added sound reduction (up to -15 dB, depending on the product). Available in rolls.


ACCESSORIES

LINOLEUM SET-ON SKIRTINGS (SOS)


- available in: 6/8 cm high x 220 cm long

LINOLEUM SET-IN SKIRTINGS (SIS)


- available in: 6/8/10 cm high x 10 cm width x 240 cm long
- also possible with 20 cm width onto the floor
- SIS outer corner available in:
6/8/10 cm high x 10 cm width
(size of the corner 13x13 cm)
- also possible with 20 cm width onto the floor



Lino SOS



Lino SIS



Lino SIS outer angle



Veneto 2.5 mm

Veldhoen Gilde
Venray, The Netherlands



Etrusco 2.5mm

Vasa Museum
Stockholm, Sweden



Veneto 2.5 mm

Bogazici University Hamlin Hall
Istanbul, Turkey



Etrusco 2.5 mm

Eckbolsheim Daycare
France



Veneto 2.5 mm

The Edge Library
Brisbane, Australia



Scan and join us to know more about Linoville!

■ **WESTERN EUROPE:** **Austria:** Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ **Belgium:** Tarkett France Belux – Tel. +32 16 35 98 80 ■ **Denmark:** Tarkett A/S – Tel. +45 43 90 60 11 ■ **Finland:** Tarkett Oy – Tel. +358 9 4257 9000 ■ **France:** Tarkett SAS – Tel. +33 1 41 20 42 49 ■ **Germany:** Tarkett Holding GmbH, Bereich Objekt – Tel. +49 62 33 810 ■ **Greece:** Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ■ **Italy:** Tarkett S.p.A. – Tel. +39 0744 7551 ■ **Luxembourg:** Tarkett GDL SA – Tel. +352 949 211 8804 ■ **Netherlands:** Tarkett Holding GmbH, Vestiging Nederland – Tel. +31 416 685 491 ■ **Norway:** Tarkett AS – Tel. +47 32 20 92 00 ■ **Portugal:** Tarkett SA – Tel. +351 21 427 64 20 ■ **Spain:** Tarkett Floors S.L. – Tel. +34 91 358 00 35 ■ **Sweden:** Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ **Switzerland:** Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 043 233 79 24 ■ **Turkey:** Tarkett Aspen – Tel. +90 212 213 65 80 ■ **United Kingdom:** Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** **Baltic Countries:** Tarkett Baltics: Tel. +370 37 262 220 ■ **Czech Republic:** Tarkett France SAS, org. slozka – Tel. +420-271 001 602 ■ **Hungary:** Tarkett France SAS – Tel. +36 1 437 8150 ■ **Poland:** Tarkett Polska Sp. z o.o. – Tel. +48 22 16 09 231 ■ **Russian Federation:** ZAO Tarkett RUS – Tel. +7 495 775 3737 ■ **Slovakia:** Tarkett France SAS, org. zlozka – Tel. +421 248 291 317 ■ **South East Europe:** Tarkett Trade d.o.o. – Tel. +381 21 7557 649 (44) 569 12 21 ■ **Ukraine:** Tarkett UA – Tel. +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA:** **Australia:** Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ **China:** Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ **North East Asia:** Tarkett Hong Kong Limited – Tel. +852 2511 8716 ■ **India:** Tarkett France (India Branch) – Tel. +91 11 4352 4073 ■ **South East Asia:** Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ **AFRICA:** **Tarkett International:** Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** **Tarkett Middle East:** Tel. +961 1 51 3363/4 ■ **Israel:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** **USA:** Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ **Canada:** Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** **Brazil:** Tarkett – Tel. 55 12 3954 7108 ■ **Argentina - Chile - Uruguay:** Tarkett Latam Mercosur – Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ **Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela:** Tarkett – Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ **Mexico /Central America:** Tarkett Latam Mexico – Tel. +55 11 98410 9310



Tarkett

professionnels.tarkett.com