

RENOLIT ALKORPLUS

INFORMATION SHEET

RENOLIT ALKORPLUS ALKORSEAL 81150

RENOLIT ALKORSEAL is a one part low modulus neutral cure silicone sealant fully tested for use with RENOLIT ALKORPLAN single ply membrane. It is the only product recommended for use on interfaces between RENOLIT ALKORPLAN and other materials. RENOLIT ALKORSEAL is a high quality construction grade formulation designed to complement the durability of the RENOLIT waterproofing system.

RENOLIT ALKORSEAL has a very good adhesion to concrete, brickwork, metals and many other common construction materials.

It is not recommended for overpainting, natural stone or use with laminated glass.

TYPICAL APPLICATIONS



Tacking green roof retention



Isolating EPDM weather strips*



Sealing perimeter upstand




Sealing chased metal edge to RENOLIT ALKORPLAN onto a sacrificial layer

*Please note EPDM materials vary and should be tested for suitability prior to use

ACCESSORIES

RENOLIT 2650 Primer is a one part, solvent containing, air drying polyacrylate/silane blend based primer. It is recommended for use in conjunction with RENOLIT ALKORSEAL for the priming of porous surfaces such as concrete, block-work, brickwork etc.

COLOURS

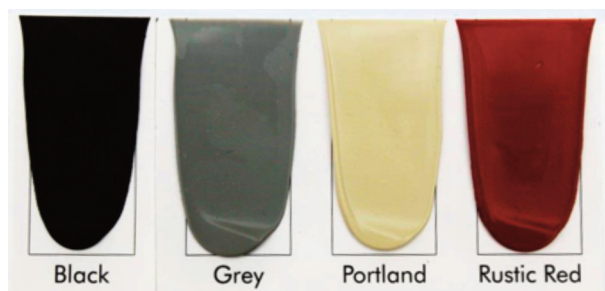

RENOLIT ALKORSEAL is available in a variety of colours suitable for the RENOLIT ALKORPLAN range:

Grey for Light Grey, Lead Grey and Metallic Silver

Black for Charcoal

Portland for Copper Green and ALKORBRIGHT

Rustic Red for Terracotta and Metallic Copper

Please note Portland and Rustic Red are subject to a 2-3 day delivery.

AVAILABILITY

RENOLIT ALKORSEAL is supplied in boxes of six 310ml tubes and supplied with six nozzles.

RENOLIT 2650 Primer is supplied per 500ml container and is subject to a 2-3 day delivery.

Issue 01/October 2015

WWW.RENOLIT.COM/ROOFING/EN

RENOLIT Cramlington Ltd - Station Road, Cramlington, Northumberland NE23 8AQ - United Kingdom

T +44 1670 718283 - F +44 1670 590096 - renolit.cramlington@renolit.com



Rely on it.