

# ACCZENT ESSENTIAL 55



## ACCZENT ESSENTIAL 55

Practical economy solution, ideal for semi-commercial areas

### SENSORIAL BENEFITS


- Available in 2, 3 and 4 meter widths
- Harmonious chip decors

### FUNCTIONAL BENEFITS

- Good underfoot & acoustic comfort
- Good cleaning & maintenance properties
- Competitively priced solution

### ENVIRONMENTAL BENEFITS

- REACH Compliant
- Better indoor air quality

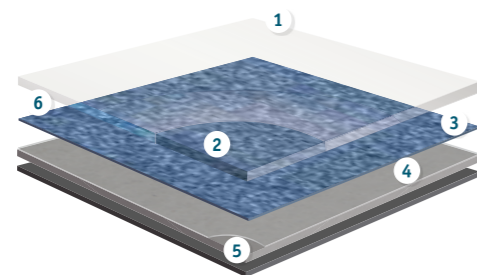

### ACCZENT ESSENTIAL 55

- 1 Easy maintenance and very high resistance to scratches: TopClean™ PUR reinforcement treatment
- 2 Resistance to abrasion: 0.55mm pure PVC transparent wear layer
- 3 High definition print
- 4 Superior dimensional stability ( $\leq 0.40\%$ ): Glass fibre non-woven reinforcement
- 5 Resistance to indentation and tearing: Solid homogeneous calendared sheet made of recycled vinyl
- 6 PVC Backing

TECHNICAL DATA	STANDARDS	ACCZENT ESSENTIAL 55
<b>Classification</b>		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42
<b>Characteristics</b>		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.55mm
Total weight	ISO 23997 (EN 430)	2 300g/m <sup>2</sup>
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Residual indentation	Average measured value	$\leq 0.10\text{mm}$
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	C <sub>s</sub> s1 glued over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R9 $\mu \geq 0.30$
Dimensional stability	ISO 23999 (EN 434)	$\leq 0.40\%$
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	$\leq 8\text{mm}$
Electrostatic properties	EN 1815 EN 1081	$\leq 2\text{kV}$ on concrete R1 > 10 <sup>9</sup> ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	$\geq 6$
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	$\Delta L_w = 10\text{dB}$
<b>Form of delivery</b>		
Form of delivery	EN 24341 (EN 426)	approx. 25lm x 2/3/4m
<b>Colours</b>		
Colours		11

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.




Download the product offer

# ACCZENT ESSENTIAL 55




Crystal - Beige

## Crystal

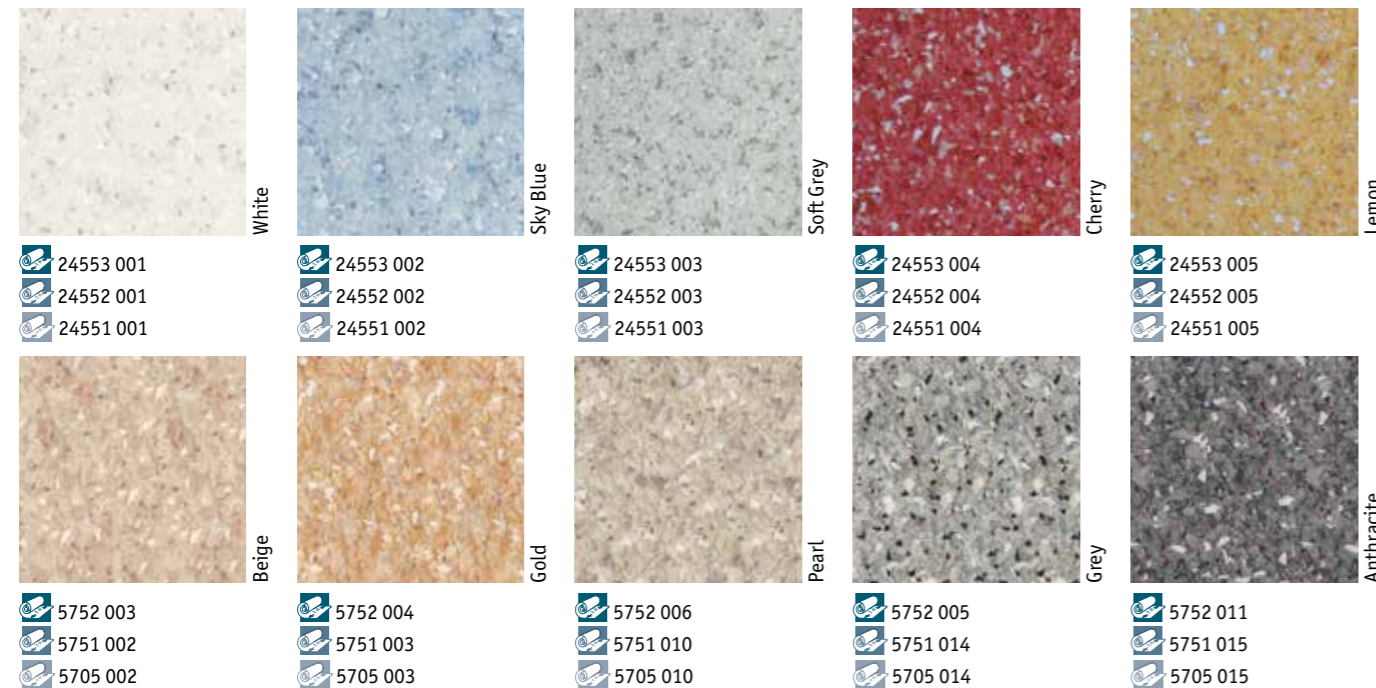

TECHNICAL DATA	STANDARDS	ACCZENT ESSENTIAL 55
<b>Classification</b>		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42
<b>Characteristics</b>		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.55mm
Total weight	ISO 23997 (EN 430)	2300g/m <sup>2</sup>
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	C <sub>s1</sub> glued over any A <sub>2</sub> or A <sub>1</sub> substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 <sup>9</sup> ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL <sub>w</sub> = 10dB

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

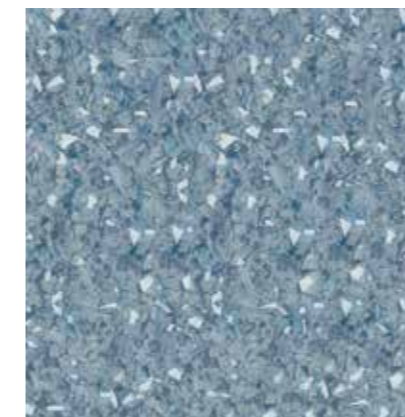

Dark Blue  
5752 009  
5751 011  
5705 011

## ACCZENT ESSENTIAL 55 Crystal

### Main Product Features

- Comfortable floor with 10dB acoustic
- Available in 2, 3 and 4 meter widths
- "Crystal" inlaid designs


### Surface Treatment



### Sustainability Tag



### Logistics Information

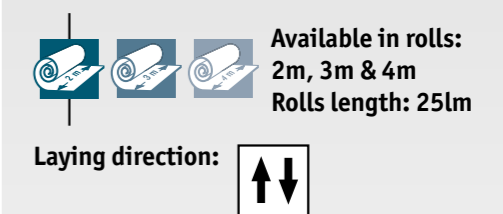

### General Information



According to European Classification ISO 10874 (EN 685)