

# TAPIFLEX & ACCZENT EVOLUTION



## TAPIFLEX & ACCZENT EVOLUTION

The ergonomical & technical solution for very heavy traffic areas in healthcare and education

### SENSORIAL BENEFITS


- Mix & match colours and designs
- All designs available in Compact and Acoustic
- Fully integrated solution to be associated with ProtectWALL (see p. 300), Wetroom (see p. 281) & a full set of accessories including multicolour welding rods

### FUNCTIONAL BENEFITS

- Great acoustics with less stress and strain
- Save money and time with easy maintenance
- No wax no polish for life with Top Clean XP™!


### ENVIRONMENTAL BENEFITS

- Unrivalled indoor air quality
- Improved carbon footprint

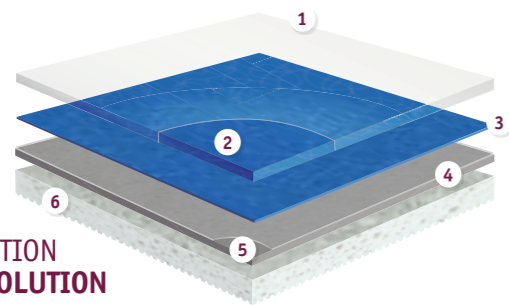

### ACOUSTIC OPTION TAPIFLEX EVOLUTION

- 1 TopClean XP™ PUR reinforcement: very high resistance to scratches and easy maintenance
- 2 Pure PVC transparent wear layer: resistance to abrasion
- 3 High definition print: for perfect designs
- 4 Glass fibre non-woven reinforcement: superior dimensional stability
- 5 Solid homogeneous calendered sheet made of recycled vinyl: resistance to indentation and tearing
- 6 High density closed-cell foam backing: sound reduction and comfort underfoot

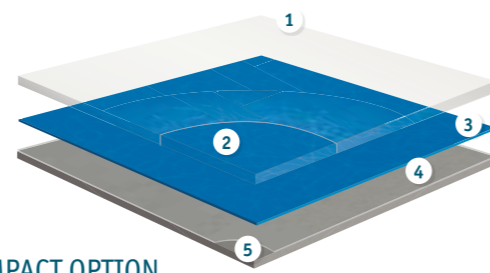

### COMPACT OPTION ACCZENT EVOLUTION

- 1 TopClean XP™ PUR reinforcement: very high resistance to scratches and easy maintenance
- 2 Pure PVC transparent wear layer: resistance to abrasion
- 3 High definition print: for perfect designs
- 4 Glass fibre non-woven reinforcement: superior dimensional stability (< 0.10%)
- 5 Solid homogeneous calendered sheet made of recycled vinyl: resistance to indentation and tearing

### ACOUSTIC OPTION TAPIFLEX EVOLUTION

TECHNICAL DATA	STANDARDS	Salt & Pepper	Sand	Spice & Candy, Uni	Vision Spaghetti XXL, Spaghetti, Havane, Pastille, Draft
<b>Classification</b>		Heterogeneous Acoustic Vinyl			
Type of floor covering	ISO 11638	Heterogeneous Acoustic Vinyl			
Classification	ISO 10874 commercial	Class: 34			
<b>Characteristics</b>					
Total thickness	ISO 24346	3.35mm	3.20mm	3.05mm	
Wear layer thickness	ISO 24340	1mm	0.9mm	0.7mm	
Total weight	ISO 23997	3 570g/m <sup>2</sup>	3 440g/m <sup>2</sup>	3 210g/m <sup>2</sup>	
PU treatment	-	TopClean XP™			
Wear layer binder content	ISO 10582	Type I			
<b>Technical performances</b>					
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	17dB	17dB	17dB	17dB
Acoustic improvement	NF S31-074	L <sub>n,r,w</sub> <65dB Class A	L <sub>n,r,w</sub> <65dB Class A	L <sub>n,r,w</sub> <65dB Class A	L <sub>n,r,w</sub> <65dB Class A
Residual indentation	Average measured value	0.08mm			
	ISO 24343-1 requirement	≤ 0.20mm			
	Best measured value(*)	0.07mm			
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 glued over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate (concrete) C <sub>n</sub> s1 glued over any derivative wood substrate			
Slip resistance	DIN 51130 / EN 13893	R9 / μ ≥ 0.30			
Dimensional stability	ISO 23999	Length + width < 0.10%			
Furniture leg	EN 424	No damage			
Castor wheel test	ISO 4918	No damage			
Curl resultant to heat	ISO 23999	≤ 8mm			
Electrostatic properties	EN 1815 / EN 1081	< 2kV on concrete / R1 > 10 <sup>9</sup> Ω			
Chemical resistance	ISO 26987	High resistance			
Hygiene	-	Does not contribute to infection spreading			
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable			
Form of delivery	EN 24341	Rolls: 231m x 2m			
Colours	aer	12	9	22	23

(\*) for information - not binding

### COMPACT OPTION ACCZENT EVOLUTION

TECHNICAL DATA	STANDARDS	Salt & Pepper	Sand	Spice & Candy, Uni	Vision Spaghetti XXL, Spaghetti, Havane, Pastille, Draft
<b>Classification</b>		Heterogeneous Compact Vinyl			
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl			
Classification	ISO 10874 commercial industrial	Classes: 34, 43			
<b>Characteristics</b>					
Total thickness	ISO 24346	2.10mm	2.00mm		
Wear layer thickness	ISO 24340	1mm	0.9mm		
Total weight	ISO 23997	3 100g/m <sup>2</sup>	2 990g/m <sup>2</sup>		
PU treatment	-	TopClean XP™			
Wear layer binder content	ISO 10582	Type I			
<b>Technical performances</b>					
Residual indentation	Average measured value	0.05mm			
	ISO 24343-1 requirement	≤ 0.10mm			
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 glued over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate (concrete) B <sub>n</sub> s1 glued over any derivative wood substrate			
Slip resistance	DIN 51130 / EN 13893	R9 / μ ≥ 0.30			
Dimensional stability	ISO 23999	Length + width < 0.10%			
Furniture leg	EN 424	No damage			
Castor wheel test	ISO 4918	No damage			
Curl resultant to heat	ISO 23999	≤ 8mm			
Electrostatic properties	EN 1815 / EN 1081	< 2kV on concrete / R1 > 10 <sup>9</sup> Ω			
Chemical resistance	ISO 26987	High resistance			
Hygiene	-	Does not contribute to infection spreading			
Thermal resistance Underfloor heating	EN ISO 10456	0.02 m <sup>2</sup> K/W Suitable			
Form of delivery	EN 24341	Rolls: 231m x 2m			
Colours		12	9	22	23

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.













# TAPIFLEX & ACCZENT EVOLUTION



Salt & Pepper - Fresh Blue



## Salt & Pepper

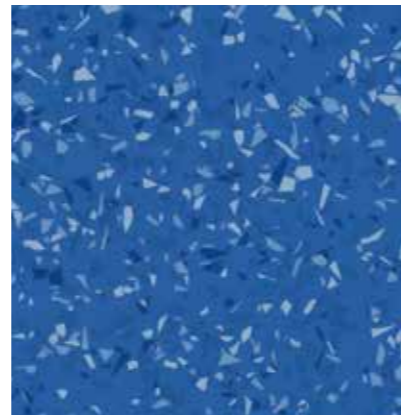 Acoustic: 4549 001 Compact: 4608 001	 Acoustic: 4549002 Compact: 4608002	 Acoustic: 4549 003 Compact: 4608 003	 Acoustic: 4549 012 Compact: 4608 012	 Acoustic: 4549 011 Compact: 4608 011
 Acoustic: 4549 005 Compact: 4608 005	 Acoustic: 4549006 Compact: 4608006	 Acoustic: 4549 007 Compact: 4608 007	 Acoustic: 4549 004 Compact: 4608 004	
 Acoustic: 4549 010 Compact: 4608 010	 Acoustic: 4549 009 Compact: 4608 009	 Acoustic: 4549 008 Compact: 4608 008		

## ACOUSTIC OPTION TAPIFLEX EVOLUTION

TECHNICAL DATA	STANDARDS	Salt & Pepper
<b>Classification</b>		
Type of floor covering	ISO 11638	Heterogeneous Acoustic Vinyl
Classification	ISO 10874 commercial	Class: 34
<b>Characteristics</b>		
Total thickness	ISO 24346	3.35mm
Wear layer thickness	ISO 24340	1mm
Total weight	ISO 23997	3 570g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	17dB
Acoustic improvement	NF S31-074	L <sub>n,e,w</sub> <65dB Class A
Residual indentation	Average measured value	0.08mm
	ISO 24343-1 requirement	≤ 0.20mm
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 glued over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate (concrete)
		C <sub>n</sub> s1 glued over any derivative wood substrate
Slip resistance	DIN 51130 / EN 13893	R9 / μ ≥ 0.30
Dimensional stability	ISO 23999	Length + width < 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostatic properties	EN 1815 / EN 1081	< 2kV on concrete / R1 > 10 <sup>9</sup> Ω
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable

(\*) for information - not binding

## COMPACT OPTION ACCZENT EVOLUTION

TECHNICAL DATA	STANDARDS	Salt & Pepper
<b>Classification</b>		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 commercial industrial	Classes: 34 43
<b>Characteristics</b>		
Total thickness	ISO 24346	2.10mm
Wear layer thickness	ISO 24340	1mm
Total weight	ISO 23997	3 100g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Residual indentation	Average measured value	0.05mm
	ISO 24343-1 requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 glued over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate (concrete)
		B <sub>n</sub> s1 glued over any derivative wood substrate
Slip resistance	DIN 51130 / EN 13893	R9 / μ ≥ 0.30
Dimensional stability	ISO 23999	Length + width < 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostatic properties	EN 1815 / EN 1081	< 2kV on concrete / R1 > 10 <sup>9</sup> Ω
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02 m <sup>2</sup> K/W Suitable

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

## TAPIFLEX & ACCZENT EVOLUTION Salt & Pepper

### Main Product Features

- Highly resistant product with 1mm opaque wear layer
- Opaque wear layer
- Inlaid designs with 3D effects
- Multicolour welding rods available for seamless finish

### Surface Treatment



### Sustainability Tag

#### Tapiflex Evolution



#### Acczent Evolution



### Logistics Information



### General Information






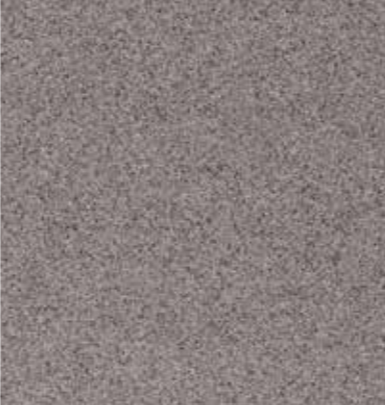





# TAPIFLEX & ACCZENT EVOLUTION



Sand - Chocolate



## Sand

			
Beige	Sand	Grey Beige	
Acoustic: 4547 001 Compact: 3766 001	Acoustic: 4547 002 Compact: 3766 002	Acoustic: 4547 003 Compact: 3766 003	
			
Dark Grey	Medium Grey	Chocolate	
Acoustic: 4547 005 Compact: 3766 005	Acoustic: 4547 006 Compact: 3766 006	Acoustic: 4547 004 Compact: 3766 004	Acoustic: 4547 007 Compact: 3766 007
			
Light Grey	White		
Acoustic: 4547 008 Compact: 3766 008	Acoustic: 4547 020 Compact: 3766 020		

## ACOUSTIC OPTION TAPIFLEX EVOLUTION

TECHNICAL DATA	STANDARDS	Sand
<b>Classification</b>		
Type of floor covering	ISO 11638	Heterogeneous Acoustic Vinyl
Classification	ISO 10874 commercial	Class: 34
<b>Characteristics</b>		
Total thickness	ISO 24346	3.20mm
Wear layer thickness	ISO 24340	0.9mm
Total weight	ISO 23997	3 440g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	17dB
Acoustic improvement	NF S31-074	L <sub>n,e,w</sub> <65dB Class A
Residual indentation	Average measured value	0.08mm
	ISO 24343-1 requirement	≤ 0.20mm
	Best measured value(*)	0.07mm
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 glued over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate (concrete) C <sub>n</sub> s1 glued over any derivative wood substrate
Slip resistance	DIN 51130 / EN 13893	R9 / μ ≥ 0.30
Dimensional stability	ISO 23999	Length + width < 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostatic properties	EN 1815 / EN 1081	< 2kV on concrete / R1 > 10 <sup>9</sup> Ω
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable

(\*) for information – not binding

## COMPACT OPTION ACCZENT EVOLUTION

TECHNICAL DATA	STANDARDS	Sand
<b>Classification</b>		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 commercial industrial	Classes: 34 43
<b>Characteristics</b>		
Total thickness	ISO 24346	2.00mm
Wear layer thickness	ISO 24340	0.9mm
Total weight	ISO 23997	2 990g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Residual indentation	Average measured value	0.05mm
	ISO 24343-1 requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 glued over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate (concrete) B <sub>n</sub> s1 glued over any derivative wood substrate
Slip resistance	DIN 51130 / EN 13893	R9 / μ ≥ 0.30
Dimensional stability	ISO 23999	Length + width < 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostatic properties	EN 1815 / EN 1081	< 2kV on concrete / R1 > 10 <sup>9</sup> Ω
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02 m <sup>2</sup> K/W Suitable

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

## TAPIFLEX & ACCZENT EVOLUTION Sand

### Main Product Features

- Very resistant product with 0.9mm wear layer
- Inlaid designs with natural colors
- Multicolour welding rods available for seamless finish

### Surface Treatment



### Sustainability Tag

#### Tapiflex Evolution


<b>100%</b> 26% Recyclable Recycled content	<b>PHthalate FREE</b> Technology *except recycled content	<b>&lt; 10 µg/m<sup>3</sup></b> Optimal Indoor Air Quality *TVOC AT 28 DAYS	<b>Restart</b> Ready
--	---	--	-------------------------

#### Acczent Evolution



<b>100%</b> 33% Recyclable Recycled content	<b>PHthalate FREE</b> Technology *except recycled content	<b>&lt; 10 µg/m<sup>3</sup></b> Optimal Indoor Air Quality *TVOC AT 28 DAYS	<b>Restart</b> Ready
--	---	--	-------------------------

### Logistics Information

Available in rolls  
Rolls length: 231m

Laying direction: 

### General Information

<b>CE</b> 0120-0340P-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 44041:2004	<b>Tapiflex Evolution Sand</b>	 According to European Classification ISO 10874 (EN 685)
<b>CE</b> 0120-0390P-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 44041:2004	<b>Acczent Evolution Sand</b>	 According to European Classification ISO 10874 (EN 685)






# TAPIFLEX & ACCZENT EVOLUTION








Candy - Fresh Blue











## Spice

 Dark Warm Beige Acoustic: 3626 054 Compact: 3747 054	 Warm Beige Acoustic: 3626 053 Compact: 3747 053	 Light Warm Beige Acoustic: 3626 052 Compact: 3747 052	 Dark Beige Acoustic: 3626 050 Compact: 3747 050	 Grey Beige Acoustic: 3626 002 Compact: 3747 002
---	--	--	---	--

## Candy

 Medium Beige Acoustic: 3626 051 Compact: 3747 051	 Dark Grey Acoustic: 3626 009 Compact: 3747 009	 Medium Grey Acoustic: 3626 036 Compact: 3747 036	 Light Grey Acoustic: 3626 035 Compact: 3747 035	 Aubergine Acoustic: 3626 062 Compact: 3747 062
--	---	---	---	---

 Dark Blue Acoustic: 3626 056 Compact: 3747 056	 Fresh Blue Acoustic: 3626 055 Compact: 3747 055	 Green Acoustic: 3626 060 Compact: 3747 060	 Dark Red Acoustic: 3626 059 Compact: 3747 059	 Tangerine Acoustic: 3626 058 Compact: 3747 058
---	--	---	---	---

 Sunny Yellow Acoustic: 3626 057 Compact: 3747 057	 Grey Acoustic: 3626 026 Compact: 3747 026	 Mint Acoustic: 3626 061 Compact: 3747 061
--	--	--

## ACOUSTIC OPTION TAPIFLEX EVOLUTION

TECHNICAL DATA	STANDARDS	Spice & Candy
<b>Classification</b>		
Type of floor covering	ISO 11638	Heterogeneous Acoustic Vinyl
Classification	ISO 10874 commercial	Class: 34
<b>Characteristics</b>		
Total thickness	ISO 24346	3.05mm
Wear layer thickness	ISO 24340	0.7mm
Total weight	ISO 23997	3 210g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	17dB
Acoustic improvement	NF S31-074	L <sub>n,e,w</sub> <65dB Class A
Residual indentation	Average measured value	0.08mm
	ISO 24343-1 requirement	≤ 0.20mm
	Best measured value(*)	0.07mm
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 glued over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate (concrete) C <sub>n</sub> s1 glued over any derivative wood substrate
Slip resistance	DIN 51130 / EN 13893	R9 / μ ≥ 0.30
Dimensional stability	ISO 23999	Length + width < 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostatic properties	EN 1815 / EN 1081	< 2kV on concrete / R1 > 10 <sup>9</sup> Ω
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable

(\*) for information – not binding

## COMPACT OPTION ACCZENT EVOLUTION

TECHNICAL DATA	STANDARDS	Spice & Candy
<b>Classification</b>		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 commercial industrial	Classes: 34 43
<b>Characteristics</b>		
Total thickness	ISO 24346	2.00mm
Wear layer thickness	ISO 24340	0.9mm
Total weight	ISO 23997	2 990g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Residual indentation	Average measured value	0.05mm
	ISO 24343-1 requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 glued over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate (concrete) B <sub>n</sub> s1 glued over any derivative wood substrate
Slip resistance	DIN 51130 / EN 13893	R9 / μ ≥ 0.30
Dimensional stability	ISO 23999	Length + width < 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostatic properties	EN 1815 / EN 1081	< 2kV on concrete / R1 > 10 <sup>9</sup> Ω
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02 m <sup>2</sup> K/W Suitable

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

## TAPIFLEX & ACCZENT EVOLUTION Spice & Candy

### Main Product Features

- Very resistant product with 0.9mm wear layer
- Color coordination between the inlaid & uni designs
- Multicolour welding rods available for seamless finish

### Surface Treatment



### Sustainability Tag

**Tapiflex Evolution**


- 100% Recyclable Recycled content
- 26% Recycled content
- PHthalate FREE Technology
- Optimal Indoor Air Quality < 10 µg/m<sup>3</sup>
- TVOC AT 28 DAYS
- Restart Ready

**Acczent Evolution**

- 100% Recyclable Recycled content
- 33% Recycled content
- PHthalate FREE Technology
- Optimal Indoor Air Quality < 10 µg/m<sup>3</sup>
- TVOC AT 28 DAYS
- Restart Ready

### Logistics Information

Available in rolls  
Rolls length: 231m

Laying direction: 

### General Information

**Tapiflex Evolution Spice & Candy**

0120-0380P-2013-04  
http://professionals.tarkett.com

Manufactured by: Tarkett SA  
08203 Sedan - FRANCE

EN 14041:2004

According to European Classification ISO 10874 (EN 685)

**Acczent Evolution Spice & Candy**

0120-0380P-2013-04  
http://professionals.tarkett.com

Manufactured by: Tarkett SA  
08203 Sedan - FRANCE

EN 14041:2004

According to European Classification ISO 10874 (EN 685)

# TAPIFLEX & ACCZENT EVOLUTION



Havane - Grey Beige



## Uni

Fresh Blue	Fresh Green	Tangerine	Sunny Yellow
Acoustic: 4552 005 Compact: 4611 005	Acoustic: 4552 008 Compact: 4611 008	Acoustic: 4552 007 Compact: 4611 007	Acoustic: 4552 006 Compact: 4611 006

## Havane

Dark Chocolate	Grey Beige	
Acoustic: 4695 045 Compact: 4694 045	Acoustic: 4695 044 Compact: 4694 044	
Cold Grey	Light Cold Grey	
Acoustic: 4695 042 Compact: 4694 042	Acoustic: 4695 041 Compact: 4694 041	Acoustic: 4695 043 Compact: 4694 043

## Pastille

Dark Grey	Medium Grey
Acoustic: 3628 019 Compact: 4609 019	Acoustic: 3628 018 Compact: 4609 018

## ACOUSTIC OPTION TAPIFLEX EVOLUTION

TECHNICAL DATA	STANDARDS	Uni	Havane
<b>Classification</b>			
Type of floor covering	ISO 11638	Heterogeneous Acoustic Vinyl	
Classification	ISO 10874 commercial	Class: 34	
<b>Characteristics</b>			
Total thickness	ISO 24346	3.05mm	
Wear layer thickness	ISO 24340	0.7mm	
Total weight	ISO 23997	3 210g/m <sup>2</sup>	
PU treatment	-	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
<b>Technical performances</b>			
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	17dB	
Acoustic improvement	NF S31-074	L <sub>n,e,w</sub> <65dB Class A	
Residual indentation	Average measured value	0.08mm	
	ISO 24343-1 requirement	≤ 0.20mm	
Residual indentation	Best measured value(*)	0.07mm	
	ISO 24343-1 requirement	≤ 0.20mm	
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 glued over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate (concrete) C <sub>n</sub> s1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 / EN 13893	R9 / μ ≥ 0.30	
Dimensional stability	ISO 23999	Length + width < 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918	No damage	
Curl resultant to heat	ISO 23999	≤ 8mm	
Electrostatic properties	EN 1815 / EN 1081	< 2kV on concrete / R1 > 10 <sup>9</sup> Ω	
Chemical resistance	ISO 26987	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable	

(\*) for information - not binding

## COMPACT OPTION ACCZENT EVOLUTION

TECHNICAL DATA	STANDARDS	Uni	Havane
<b>Classification</b>			
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl	
Classification	ISO 10874 commercial industrial	Classes: 34, 43	
<b>Characteristics</b>			
Total thickness	ISO 24346	2.00mm	
Wear layer thickness	ISO 24340	0.9mm	
Total weight	ISO 23997	2 990g/m <sup>2</sup>	
PU treatment	-	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
<b>Technical performances</b>			
Residual indentation	Average measured value	0.05mm	
	ISO 24343-1 requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 glued over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate (concrete) B <sub>n</sub> s1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 / EN 13893	R9 / μ ≥ 0.30	
Dimensional stability	ISO 23999	Length + width < 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918	No damage	
Curl resultant to heat	ISO 23999	≤ 8mm	
Electrostatic properties	EN 1815 / EN 1081	< 2kV on concrete / R1 > 10 <sup>9</sup> Ω	
Chemical resistance	ISO 26987	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.02 m <sup>2</sup> K/W Suitable	

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

# TAPIFLEX & ACCZENT EVOLUTION Uni, Havane & Pastille

## Main Product Features

- Very resistant product with TopClean XP™ PUR reinforcement
- Design offers for rich matching potential

## Surface Treatment



## Sustainability Tag

<b>Tapiflex Evolution</b>	<b>Acczent Evolution</b>
100% Recyclable Recycled content	100% Recyclable Recycled content
26% Recycled content	33% Recycled content
PHthalate FREE Technology	PHthalate FREE Technology
< 10 µg/m <sup>3</sup> Optimal Indoor Air Quality	< 10 µg/m <sup>3</sup> Optimal Indoor Air Quality
*except recycled content	*except recycled content
*TVOC AT 28 DAYS	*TVOC AT 28 DAYS
Restart Ready	Restart Ready

## Logistics Information

Available in rolls  
Rolls length: 231m

Laying direction:

## General Information

	<b>Tapiflex Evolution Uni</b> 0120-0310-P-2013-04 http://professional.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14041:2004		According to European Classification ISO 10874 (EN 685)
	<b>Acczent Evolution Uni</b> 0120-0360-P-2013-04 http://professional.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14041:2004		According to European Classification ISO 10874 (EN 685)
	<b>Tapiflex Evolution Vision Acoustic</b> 0120-0320-P-2013-04 http://professional.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14041:2004		According to European Classification ISO 10874 (EN 685)
	<b>Acczent Evolution Vision Compact</b> 0120-0370-P-2013-04 http://professional.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14041:2004		According to European Classification ISO 10874 (EN 685)

# TAPIFLEX & ACCZENT EVOLUTION



Spaghetti XXL - White/ Spaghetti - Fresh Blue




## Spaghetti



Fresh Blue

Acoustic: 4551 005  
Compact: 4610 005



Green

Acoustic: 4551 008  
Compact: 4610 008



Tangerine

Acoustic: 4551 007  
Compact: 4610 007



Sunny Yellow


Acoustic: 4551 006  
Compact: 4610 006



Grey Beige

Acoustic: 4551 004  
Compact: 4610 004

## Spaghetti XXL




Sand

Acoustic: 4551 003  
Compact: 4610 003




Grey

Acoustic: 4551 002  
Compact: 4610 002



Light Grey

Acoustic: 4551 001  
Compact: 4610 001



White

Acoustic: 3628 101  
Compact: 4609 101



Black


Acoustic: 3628 102  
Compact: 4609 102

## Draft



Chocolate

Acoustic: 3628 207  
Compact: 4609 207



Sand

Acoustic: 3628 206  
Compact: 4609 206



Grey Beige

Acoustic: 3628 205  
Compact: 4609 205



Light Beige

Acoustic: 3628 201  
Compact: 4609 201



Grey

Acoustic: 3628 204  
Compact: 4609 204



Light Grey

Acoustic: 3628 203  
Compact: 4609 203

## ACOUSTIC OPTION TAPIFLEX EVOLUTION

TECHNICAL DATA	STANDARDS	Vision
<b>Classification</b>		
Type of floor covering	ISO 11638	Heterogeneous Acoustic Vinyl
Classification	ISO 10874 commercial	Class: 34
<b>Characteristics</b>		
Total thickness	ISO 24346	3.05mm
Wear layer thickness	ISO 24340	0.7mm
Total weight	ISO 23997	3 210g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	17dB
Acoustic improvement	NF S31-074	L <sub>n,e,w</sub> <65dB Class A
Residual indentation	Average measured value	0.08mm
	ISO 24343-1 requirement	≤ 0.20mm
	Best measured value(*)	0.07mm
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 glued over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate (concrete) C <sub>n</sub> s1 glued over any derivative wood substrate
Slip resistance	DIN 51130 / EN 13893	R9 / μ ≥ 0.30
Dimensional stability	ISO 23999	Length + width < 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostratic properties	EN 1815 / EN 1081	< 2kV on concrete / R1 > 10 <sup>9</sup> Ω
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable

(\*) for information - not binding

## COMPACT OPTION ACCZENT EVOLUTION

TECHNICAL DATA	STANDARDS	Vision
<b>Classification</b>		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 commercial industrial	Classes: 34 43
<b>Characteristics</b>		
Total thickness	ISO 24346	2.00mm
Wear layer thickness	ISO 24340	0.9mm
Total weight	ISO 23997	2 990g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Residual indentation	Average measured value	0.05mm
	ISO 24343-1 requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 glued over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate (concrete) B <sub>n</sub> s1 glued over any derivative wood substrate
Slip resistance	DIN 51130 / EN 13893	R9 / μ ≥ 0.30
Dimensional stability	ISO 23999	Length + width < 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostratic properties	EN 1815 / EN 1081	< 2kV on concrete / R1 > 10 <sup>9</sup> Ω
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02 m <sup>2</sup> K/W Suitable

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

## TAPIFLEX & ACCZENT EVOLUTION Vision

### Main Product Features

- Very resistant product with TopClean XP™ PUR reinforcement
- Printed design offer for rich matching potential

### Surface Treatment



### Sustainability Tag

#### Tapiflex Evolution




#### Acczent Evolution



### Logistics Information

Available in rolls  
Rolls length: 231m



### General Information

