


Standard Plus

- └ Tiles and sheets in different thicknesses
- └ Classic design in refreshed colours
- └ Tough and durable
- └ PUR surface treatment for low maintenance

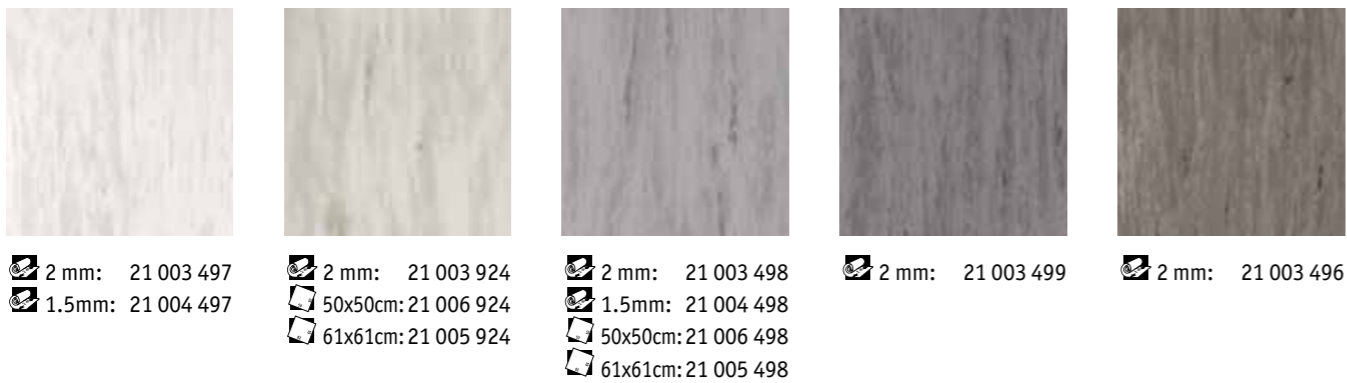

Compact

Homogeneous

Contract Plus p. 82-83

Standard Plus p. 84-85

Vylon Plus p. 86-87



Plus

The universal flooring solution.

Tarkett's Plus range offers durable, multi-purpose homogeneous vinyl floorings that are excellent value for money. With a colour range that mixes classic standards and contemporary trends, Plus is an ideal solution for the education, retail and commercial sectors.

Tarkett Plus also provides non-linear designs that are totally new for homogeneous floorings in this segment.

The Plus range is equipped with PUR surface treatment for protection and easier initial maintenance.

The PUR also provides a good base for future maintenance procedures.

All PLUS floorings contain non-phthalate plasticizers and contribute to an optimal indoor air quality with VOC emissions below quantifiable level.

Technical data		Contract Plus	Standard Plus 2.0 mm	Standard Plus 1.5 mm	Vylon Plus
Classification	ISO 10581 (EN 649)	Classes: 34	Classes: 34	Classes: 32	Classes: 34
	commercial	43	43	41	43
	industrial				
	UPEC Classification				U4 P3 E2/3 C2
	NF UPEC certificate number (Ref NF189)				312-024.1
Total thickness	ISO 24346 (EN 428)	2.00 mm	2.00 mm	1.5 mm	2.00 mm
Total weight	ISO 23997 (EN 430)	3150 g/m ²	3 300 g/m ²	2 475 g/m ²	3 700 g/m ²
Surface treatment	—	PUR	PUR	PUR	Factory finish
Abrasion group	EN 660-2	Group P: ≤ 4.00 mm ³	Group P: ≤ 4.00 mm ³	Group P: ≤ 4.00 mm ³	Group M: ≤ 7.50 mm ³
Volume loss					
Residual indentation	ISO 24343-1 (EN 433)	Approx. 0.04 mm	Approx. 0.04 mm	Approx. 0.04 mm	Approx. 0.04 mm
Castor wheel test	ISO 4918 (EN 425)	Suitable	Suitable	Suitable	Suitable
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40 %	Rolls: ≤ 0.40 %	Rolls: ≤ 0.40 %	Rolls: ≤ 0.40 %
		Tiles: ≤ 0.25%	Tiles: ≤ 0.25%	Tiles: ≤ 0.25%	Tiles: ≤ 0.25%
Reaction to fire	EN ISO 13501-1	B _f s1	B _f s1	B _f s1	B _f s1
	EN ISO 9339-1	≥ 8 kW/m ²	≥ 8 kW/m ²	≥ 8 kW/m ²	≥ 8 kW/m ²
	EN ISO 11925-2	Pass	Pass	Pass	Pass
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653				
Static electrical charge	EN 1815	< 2 kV	< 2 kV	< 2 kV	< 2 kV
Light fastness	EN ISO 105-B02	≥ 6	≥ 6	≥ 6	≥ 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance	Good resistance	Good resistance	—
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	R9 ≥ 0.3	R9 ≥ 0.3	R9 ≥ 0.3
Thermal resistance	DIN 52612	0.01 m ² K/W	0.01 m ² K/W		—
Underfloor heating		Suitable - max. 27 °C	Suitable - max. 27 °C	Suitable - max. 27 °C	
Colours	—	24	30	12	18
Form of delivery	ISO 24341 (EN 426)	Rolls: 23 lm x 2 m	Rolls: 23 lm x 2 m	Rolls: 25 r m x 2 m	Rolls: 20 lm x 2 m
	ISO 24342 (EN 427)	Tiles: 61 x 61 cm on demand	Tiles: 50 x 50 cm 30 x 30 cm		Tiles: 61 x 61 cm 30 x 30 cm

The above information is subject to modifications for the benefit of further improvement (01/2013).
For more detailed technical information, please contact Tarkett.