

WALL PROTECTIONS


WALL PROTECTIONS

Wallgard
ProtectWALL

p. 270
p. 272




OUR SELECTION OF ACCESSORIES FOR WALL PROTECTIONS



Set-in corner

Protects the external corner of walls vs impacts and provides neat finish. Installed under the wall covering.

See p. 491 for detailed info

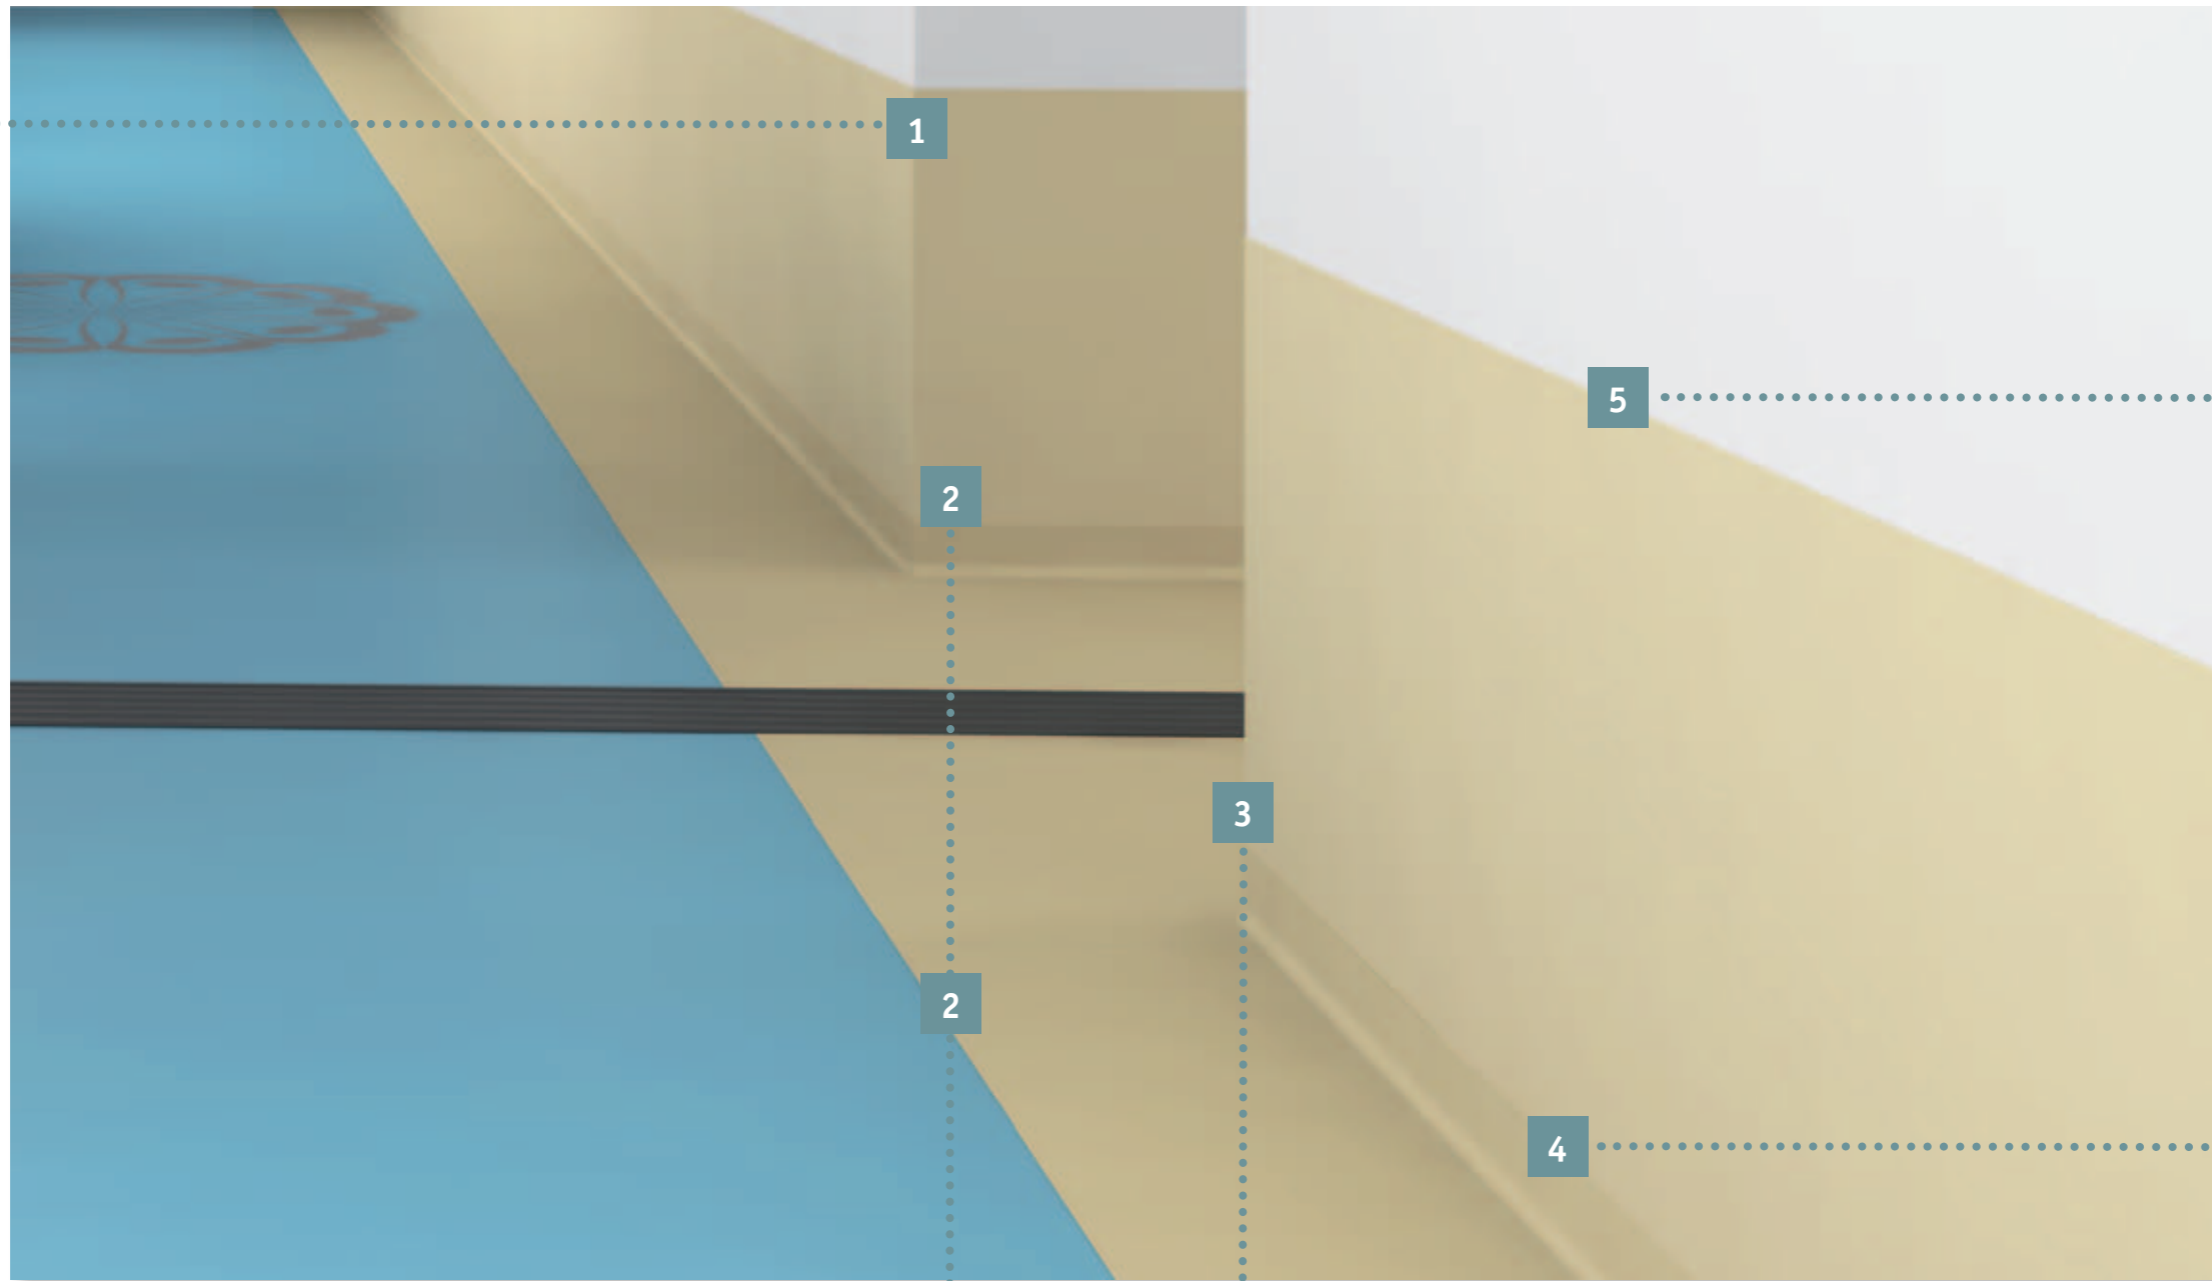

ProtectWALL

Protects the wall from impacts.

Cap

Provides a perfect finish and protects the edge of the wall covering.

See p. 490 for detailed info



Cove former


PA20
Improves hygiene inside wall corner and makes maintenance easier.

See p. 488 for detailed info



Welding rod

Secures the junction between 2 rolls of floor coverings or wall and floor coverings.



Set-on corner

Protects the external corner of walls vs impacts and provides neat finish. Installed over the wall covering.

See p. 491 for detailed info

WALL PROTECTIONS



Wallcoverings solutions designed to suit all wall conditions and offer protection for healthcare and education environments

SENSORIAL BENEFITS


- Attractive and functional designs
- Colour coordination with other Tarkett ranges
- Wide range of accessories

FUNCTIONAL BENEFITS

- High performance protection from staining and mechanical damage
- ProtectWALL 2CR option for clean rooms
- Easy to install
- Easy to clean and maintain

ENVIRONMENTAL BENEFITS


- Unrivalled indoor air quality
- Improved carbon footprint

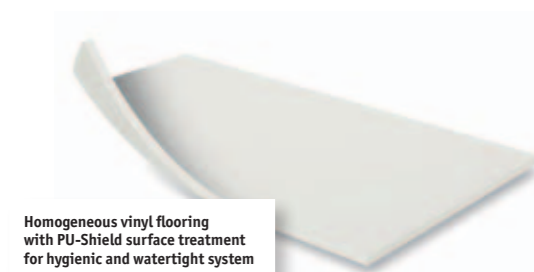

Homogeneous vinyl flooring with PU-Shield surface treatment for hygienic and watertight system


WALLGUARD

- 1 TopClean XP Pur reinforced surface: Excellent resistance to scuffing, soiling and staining and easy maintenance.
- 2 Transparent wear layer
- 3 Printed film
- 4 Intermediate layer
- 5 Backing layer

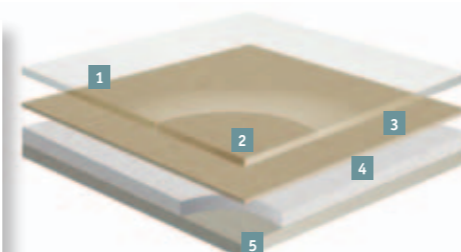

PROTECTWALL 1.5mm

- 1 TopClean XP Pur reinforced surface: Excellent resistance to scuffing, soiling and staining and easy maintenance.
- 2 Transparent wear layer
- 3 Printed film
- 4 Intermediate layer
- 5 Backing layer

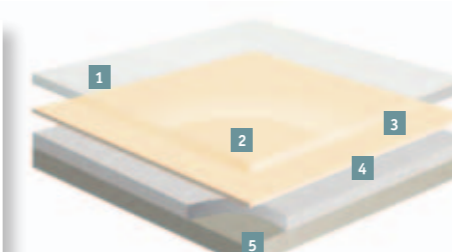

PROTECTWALL 2mm AND 2CR




Download the product offer

TECHNICAL DATA	STANDARDS	Wallgard	ProtectWALL 1.5mm	ProtectWALL 2mm	ProtectWALL 2 CR (Clean Room)
Description					
Description	EN 15102	-	Compact, flexible, calandered, multilayer protection Wallcovering		
	EN 14644-1	-	-	Class 1, GMP class A	
Characteristics					
Total thickness	ISO 24346 (EN 428)	1.3mm	1.50mm	2.00mm	2.00mm
Total weight	ISO 23997 (EN 430)	2 210g/m ²	2 400g/m ²	3 000g/m ²	3 000g/m ²
Transparent wear layer	ISO 24340 (EN 429)	1.3mm	0.35mm	0.55mm	0.55mm
Surface Treatment	-	PU-Shield	TopClean XP™		
Technical performances					
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%	≤ 0.80% Lengthwise		
Curl resultant to heat	EN 424	-	≤ 2mm		
Wetroom test	GBR Class VT	Approved	-		
Reaction to fire	EN ISO 13501-1 BS 476: Part 7 AS/NZS 3837 UNI 8457 ASTM E84	Class B s2 d0 Class 1 Class B Class 1 Class B	Bs3d0		
Abrasion	EN 660-2	-	Group T: ≤ 2mm ³		
Thermal resistance	EN 12524	-	0.02m ² K/W		
Electrostatic properties	EN 1815	-	≤ 2kV		
Light fastness	EN ISO 105-B02	≥ 6	≥ 6		
Resistance to impacts	EN 259-2 / ASTM D 4226	-	Resistant to impacts No visible bursts nor cracks		
Scratch resistance	-	-	Sclerometer test: Excellent No visible scratch with naked eye		
Scuff resistance	-	-	Excellent - No visible mark after cleaning		
Determination of Flexibility	ISO 24344 (EN 435)	-	No damage, no crack		
Determination of seam strength	EN 684	-	> 400 N/50 mm	> 400 N/50mm	> 400 N/50mm
Stain resistance Chemical resistance	ISO 26987 (EN 423)	Good resistance	Excellent		
Spongeability washability Lyability brushability	EN 12956	-	No change in appearance		
Contamination control	En 14644-1	-	-	-	ISO Class 1 / GMP Class A
Ease of decontamination	ISO 8690	-	-	-	Good
Clean room test	ASTM F24/65 ASTM F51/00	Satisfactory Class A	-		
Hygiene	-	Does not favour growth	Does not contribute to infection spreading		
Form of delivery					
Form of delivery	ISO 24341 (EN 426) Sheet (rolls)	Rolls: approx. 30lm x 2m	20 r m x 2m		
Colours					
Colours	-	6	Tisse: 10 - Vital: 6 Graphic Lines: 2 - Uni: 1	Abstract: 12	Uni: 6

The above information is subject to modifications for the benefit of further improvement (01/2014).
For more detailed technical information, please contact Tarkett.




Wallgard - 3388 014



3388 011



3388 012



3388 013



3388 014



3388 015

TECHNICAL DATA	STANDARDS	Wallgard
Characteristics		
Total thickness	ISO 24346 (EN 428)	1.3mm
Total weight	ISO 23997 (EN 430)	2 210g/m ²
Transparent wear layer	ISO 24340 (EN 429)	1.3mm
Surface Treatment	—	PU-Shield
Technical performances		
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%
Wetroom test	GBR Class VT	Approved
Reaction to fire	EN ISO 13501-1 BS 476: Part 7 AS/NZS 3837 UNI 8457 ASTM E84	Class B s2 d0 Class 1 Class B Class 1 Class B
Light fastness	EN ISO 105-B02	≥ 6
Stain resistance Chemical resistance	ISO 26987 (EN 423)	Good resistance
Clean room test	ASTM F24/65 ASTM F51/00	Satisfactory Class A
Hygiene	—	Does not favour growth

The above information is subject to modifications for the benefit of further improvement (01/2014).
For more detailed technical information, please contact Tarkett.

Main Product Features

- Impervious surface with PU-Shield
- Hygienic and watertight
- Easy to install - vertically or horizontally
- Attractive and functional design


Surface Treatment



Sustainability Tag



Logistics Information



General Information



3388 016



Play with the Room Designer

PROTECTWALL




ProtectWALL - Tissé - 26500 009



Tissé 1.5mm



26500 009



26500 003



26500 004



26500 010




26500 005



26500 006




26500 008



26500 001




26500 002



26500 007

Uni 1.5mm



26500 021



26500 011

Graphic Lines 1.5mm



26500 019



26500 020




26500 017



26500 018

Vital 1.5mm



26500 013



26500 017

TECHNICAL DATA	STANDARDS	ProtectWALL 1.5mm
Description		
Description	EN 15102	Compact, flexible, calandered, multilayer protection Wallcovering
Characteristics		
Total thickness	ISO 24346 (EN 428)	1.50mm
Total weight	ISO 23997 (EN 430)	2 400g/m ²
Transparent wear layer	ISO 24340 (EN 429)	0.35mm
Surface Treatment	—	TopClean XP™
Technical performances		
Dimensional stability	ISO 23999 (EN 434)	≤ 0.80% Lengthwise
Curl resultant to heat	EN 424	≤ 2mm
Reaction to fire	EN ISO 13501-1 BS 476: Part 7 AS/NZS 3837 UNI 8457 ASTM E84	Bs3d0
Abrasion	EN 660-2	Group T: ≤ 2mm ³
Thermal resistance	EN 12524	0.02 m ² K/W
Electrostatic properties	EN 1815	≤ 2 kV
Light fastness	EN ISO 105-B02	≥ 6
Resistance to impacts	EN 259-2 / ASTM D 4226	Resistant to impacts No visible bursts or cracks
Scratch resistance	—	Sclerometer test: Excellent No visible scratch with naked eye
Scuff resistance	—	Excellent - No visible mark after cleaning
Determination of Flexibility	ISO 24344 (EN 435)	No damage, no crack
Determination of seam strength	EN 684	> 400 N/50 mm
Stain resistance Chemical resistance	ISO 26987 (EN 423)	Excellent
Spongeability washability Lyability brushability	EN 12956	No change in appearance
Hygiene	—	Does not contribute to infection spreading

The above information is subject to modifications for the benefit of further improvement (01/2014).
For more detailed technical information, please contact Tarkett.

Vital 1.5mm



26500 015

PROTECTWALL 1.5mm

Main Product Features

- Impact and scratch resistant
- Stain and chemical resistant
- PUR surface treatment for easy cleaning and maintenance
- Colour coordination with various Tarkett ranges for one global design solution
- Reduced damage to walls = lower repair and maintenance costs

Surface Treatment




Sustainability Tag



(1) Progressively for all our professional vinyl products during 2014

Logistics Information



Laying direction:



Play with the Room Designer

PROTECTWALL



ProtectWALL 2CR - 26501 005



Abstract 2mm



26501 016 26501 018 26501 010 26501 009 26501 013



26501 014 26501 012 26501 011 26501 017 26501 015

Uni 2mm CR (Clean Room)



26501 006 26501 005 26501 004 26501 003 26501 002


TECHNICAL DATA	STANDARDS	ProtectWALL 2mm	ProtectWALL 2 CR (Clean Room)
Description			
Description	EN 15102	Compact, flexible, calandered, multilayer protection Wallcovering	Compact, flexible, calandered, multilayer protection Wallcovering
	EN 14644-1	-	Class 1, GMP class A
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	
Total weight	ISO 23997 (EN 430)	3 000g/m ²	
Transparent wear layer	ISO 24340 (EN 429)	0.55mm	
Surface Treatment	-	TopClean XP™	
Technical performances			
Dimensional stability	ISO 23999 (EN 434)	≤ 0.80% Lengthwise	
Curl resultant to heat	EN 424	≤ 2mm	
Reaction to fire	EN ISO 13501-1	Bs3d0	
Abrasion	EN 660-2	Group T: ≤ 2mm ³	
Thermal resistance	EN 12524	0.02 m ² K/W	
Electrostatic properties	EN 1815	≤ 2 kV	
Light fastness	EN ISO 105-B02	≥ 6	
Resistance to impacts	EN 259-2 / ASTM D 4226	Resistant to impacts No visible bursts or cracks	
Scratch resistance	-	Sclerometer test: Excellent No visible scratch with naked eye	
Scuff resistance	-	Excellent - No visible mark after cleaning	
Determination of Flexibility	ISO 24344 (EN 435)	No damage, no crack	
Determination of seam strength	EN 684	> 400 N/50mm	
Stain resistance Chemical resistance	ISO 26987 (EN 423)	Excellent	
Spongeability washability Lyability brushability	EN 12956	No change in appearance	
Contamination control	En 14644-1	-	ISO Class 1 / GMP Class A
Ease of decontamination	ISO 8690	-	Good
Hygiene	-	Does not contribute to infection spreading	

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.

Abstract 2mm



26501 008 26501 007



26501 001

PROTECTWALL 2mm and 2CR

Main Product Features

- Impact and scratch resistant
- Stain and chemical resistant
- Available in 2.00mm and 2mm CR (Clean Room) versions
- PUR surface treatment for easy cleaning and maintenance
- Colour coordination with various Tarkett ranges for one global design solution
- Reduced damage to walls = lower repair and maintenance costs

Surface Treatment



Sustainability Tag



(1) Progressively for all our professional vinyl products during 2014

Logistics Information

Available in rolls
Rolls length: approx. 20lm

Laying direction:

