


AQUARELLE FLOOR



Pastille - Turquoise

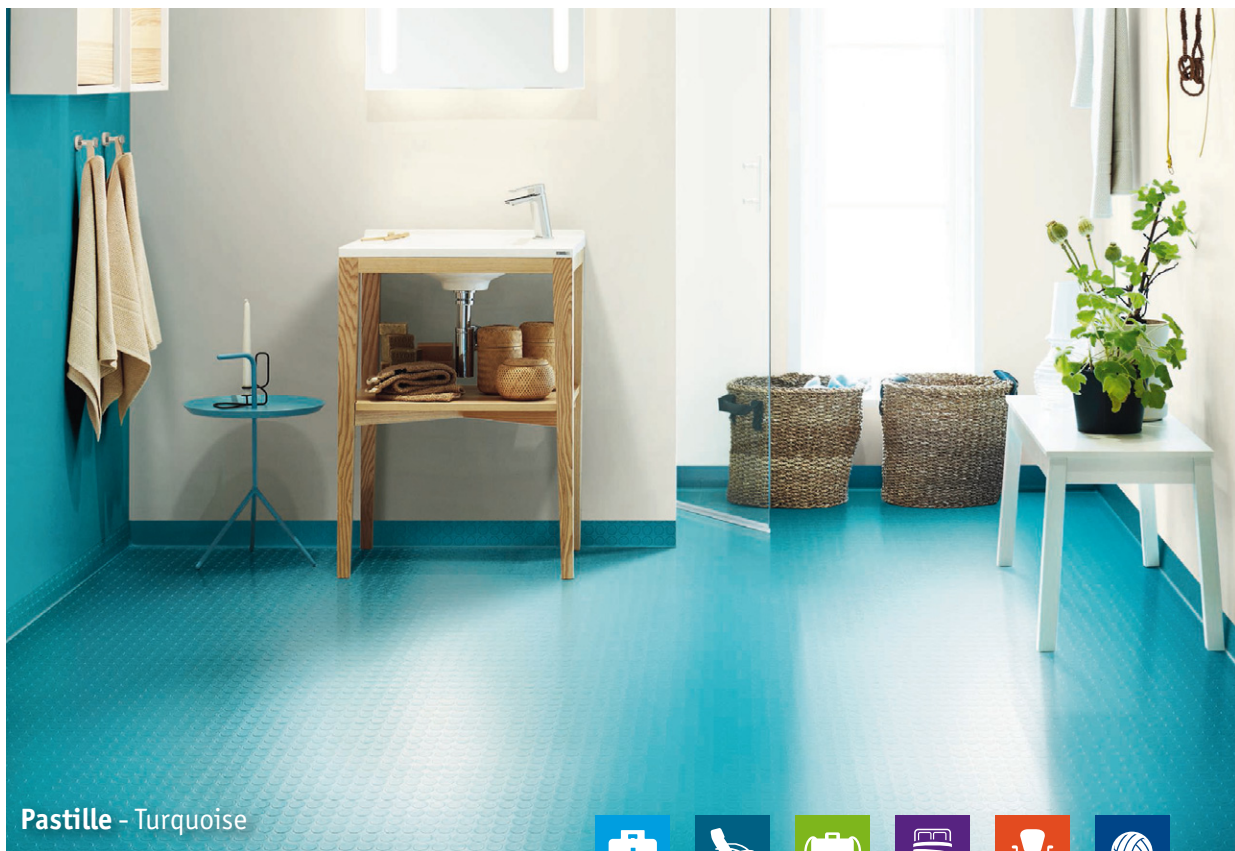

Pastille




Anthracite

25905 035



Blue

25905 148



Turquoise


25905 149



Red

25905 150

Pebble



Black and White

25905 039

Kiruma



Grey

25905 029



Dark Grey

25905 031



Beige

25905 144



Blue

25905 145



Aluminium

25905 146

TECHNICAL DATA	STANDARDS	Aquarelle Floor
Classification		
Type of floor covering	EN 649	Heterogeneous compact vinyl for use in wetrooms
Classification	ISO 10874 (EN 685) commercial	Class: 31
Characteristics		
Total thickness	ISO 24346 (EN 428)	1.50mm
Wear layer thickness	ISO 24340 (EN 429)	0.35mm
Total weight	ISO 23997 (EN 430)	2 400g/m ²
Wear layer reinforcement	—	—
Abrasion group Volume loss	EN 660-2	≤ 2.00mm ³
Abrasion	EN 13845 Annex D	—
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Dimensional stability	ISO 23999 (EN 434)	*
Curl resultant to heat	EN 434	≤ 8mm
Reaction to fire	EN 13501-1	B _{fl} s1 glued over any A2 _{fl} or A1 _{fl} substrate
Slip resistance	DIN 51130 EN 13893	* ≥ 0.3
Bare foot test	DIN 51097	—
Seam strength (N/50mm)	EN 684	Average value ≥ 240 N/50mm Individual values ≥ 180 N/50mm
Static electrical charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	ISO 26987 (EN 423)	—
Fungi and bacteria resistance	ISO 846: Part C	—
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable

* Not required.

The above information is subject to modifications for the benefit of further improvement (07/2015).

For more detailed technical information, please contact Tarkett.

AQUARELLE FLOOR

Main Product Features

- Waterproof installation, ideal for wet domestic applications
- Unique wetroom concept: floors, walls and accessories available (compatible with Granit and/or Aquarelle Wall)
- Fresh colours and modern designs
- Hygienic and easy to maintain

Surface Treatment



Sustainability Tag



(1) For all products produced in 2015

Logistics Information



Available in rolls
Rolls length: approx. 201m

Laying direction:



General Information




According to European Classification ISO 10874 (EN 685)



Play with the Room Designer

AQUARELLE FLOOR

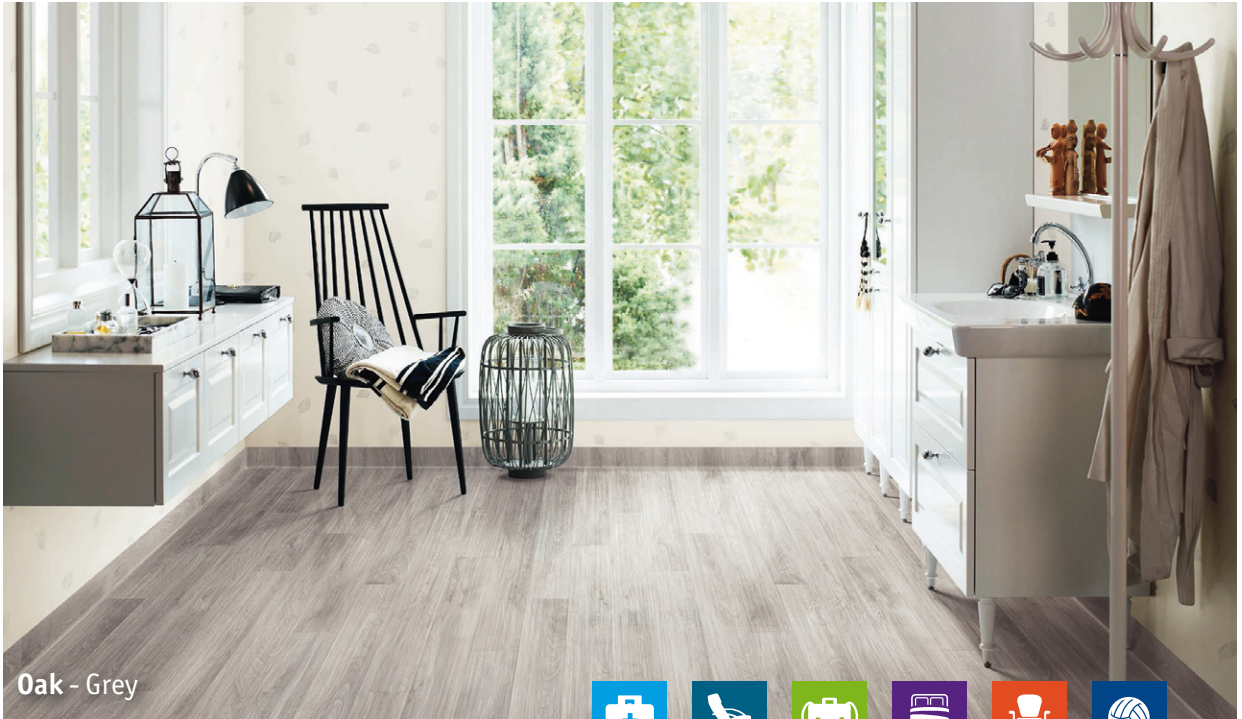

Oak - Grey



Aquastone




Dark Grey

 25905 014




Light Grey

 25905 141




Beige

 25905 142



Anthracite

 25905 143




Grey

 25905 138

Variata





Dark Grey

 25905 139




Beige

 25905 140





Dark Grey

 25905 132




Anthracite


 25905 134




Teak

 25905 022

Skiffer




White

 25905 037




Black

 25905 038




Grey

 25905 147

Skiffer



White

 25905 133

TECHNICAL DATA	STANDARDS	Aquarelle Floor
Classification		
Type of floor covering	EN 649	Heterogeneous compact vinyl for use in wetrooms
Classification	ISO 10874 (EN 685) commercial	Class: 31
Characteristics		
Total thickness	ISO 24346 (EN 428)	1.50mm
Wear layer thickness	ISO 24340 (EN 429)	0.35mm
Total weight	ISO 23997 (EN 430)	2 400g/m ²
Wear layer reinforcement	—	—
Abrasion group Volume loss	EN 660-2	≤ 2.00mm ³
Abrasion	EN 13845 Annex D	—
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Dimensional stability	ISO 23999 (EN 434)	—
Curl resultant to heat	EN 434	≤ 8mm
Reaction to fire	EN 13501-1	B _{fl} s1 glued over any A ₂ _{fl} or A ₁ _{fl} substrate
Slip resistance	DIN 51130 EN 13893	* ≥ 0.3
Bare foot test	DIN 51097	—
Seam strength (N/50mm)	EN 684	Average value ≥ 240 N/50mm Individual values ≥ 180 N/50mm
Static electrical charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	ISO 26987 (EN 423)	—
Fungi and bacteria resistance	ISO 846: Part C	—
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable

* Not required.

The above information is subject to modifications for the benefit of further improvement (07/2015).

For more detailed technical information, please contact Tarkett.

AQUARELLE FLOOR

Main Product Features

- Waterproof installation, ideal for wet domestic applications
- Unique wetroom concept: floors, walls and accessories available (compatible with Granit and/or Aquarelle Wall)
- Fresh colours and modern designs
- Hygienic and easy to maintain

Surface Treatment



Sustainability Tag



(1) For all products produced in 2015

Logistics Information



Available in rolls
Rolls length: approx. 201m

Laying direction:



Teak
Oak

General Information



According to European
Classification ISO 10874 (EN 685)



Play with the Room Designer