# **Omnisports** Compact





<u>Description</u>:
Vinyl floor covering over fibreglass. Protected with Top Clean XP® (dirt-resistant treatment for ease of maintenance).

<u>Type of Installation :</u>
- Glued Installation over a Lumaflex sub construction or over the traditional support

**Top Embossing:** Sorrent

# **Installation and maintenance** quides : On request

#### Dimensions (EN ISO 24341):





## Total Thickness (EN ISO 24346):



2 mm (± 0,15mm)

# Total Weight (EN ISO 23997):



3,1 kg/m2 (±200g)

Technical data in force as from the date of publication (11/2015).

The values above correspond to laboratory test (no in situ test), and are subject to modifications for the benefit of further

improvement. For more detailed technical information, please contact Tarkett.

Colors of the products shown in the photos or samples are indicative only. There may be differences in color, gloss and embossing structure between the products sold and photos or samples.


Properties	Standard	Omnisports Compact

## Must be installed on a wooden sub construction like Lumaflex to reach the requirements of the EN14 904 standard

Properties				
Friction	EN 13036-4	80 to 110		
Sock Absorption %	EN 14 808	not measured		
Vertical deformation	EN 14 809	not measured		
Vertical ball rebound	EN 12235	not measured		

Classification				
Reaction to Fire	EN 13501-1	Bfl-S1		
		Glued installation		

Technical characteristics				
Wear Layer	EN 429	0,8		
Resistance to wear	EN ISO 5470-1	not measured		
Resistance to indentation	EN 1516	not measured		
Behaviour under a rolling load	EN 1569	not measured		
Resistance to impact	EN 1517	not measured		

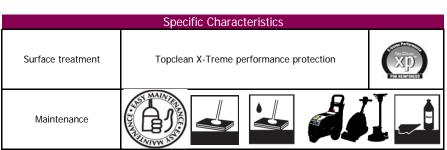

COMPATIBLE SLABS: Concrete, asphalt screed, anhydrite screed. Any deviation of the slab must be corrected prior installation (6 mm under a 3 m straight edge). We reserve the right to modify these specifications without, however, affecting their compliance with standards.

### **Omnisports Compact**















0120-003-DoP-2013-04

nufactured by: Tarkett France 08200 Sedan - FRANCE

Tarkett France – 1 terrasse Bellini – Tour Initiale TSA 94200 - 92919 Paris la Défense CEDEX TÉL. +33(0)1 41 20 40 40 – FAX +33(0)1 41 20 47 05 – info@tarkett.com www.professionals.tarkett.com

