

PRIMO SD




Primo SD - 21012 566




Medium pure grey

21012 561
21016 561




Medium dark pure grey

21012 562
21016 562




Dark cool grey

21012 563
21016 563




Light cool beige

21012 564
21016 564




Medium warm beige

21012 565
21016 565




Dark warm beige

21012 566
21016 566



Medium green

21012 567
21016 567




Dark green

21012 568
21016 568

TECHNICAL DATA	STANDARDS	Primo SD
Classification		
Type of floor covering	ISO 10582 (EN 649) - vinyl	Static dissipative pressed homogeneous vinyl flooring
Classification	ISO 10581 (EN 649) - vinyl domestic commercial light industrial	Classes: - 34 43
Characteristics		
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total thickness	ISO 24346 (EN 428)	2.00mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²
Flexibility	ISO 23344 (EN 435 Method A)	Pass
Technical performances		
Residual indentation	Average measured value	0.03mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B _{fl} s1
	EN ISO 9239-1 EN ISO 11925-2	≥ 8 kW/m ² Pass
Slip resistance	DIN 51130 EN 13893 BS 7976-2	R9 ≥ 0.3 Low risk of slip
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles
Castor chair test	ISO 4918 (EN 425)	Suitable
Thermal resistance Underfloor heating	EN ISO 10456 (EN 12524)	0.01m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ level 6
Abrasion group Volume loss	EN 660: Part 2	Group P: ≤ 4.0mm ³
Electrical insulation	VDE 100, Part 600	R _i ≥ 5x10 ⁴ Ω
Static electrical charge	EN 1815	< 2kV
Electrical resistance	ESD-approval SP-method 2472 EN 1081	R _t ≤ 10 ⁸ ohms
	EN/IEC 61340-4-1 EN/IEC 61340-4-5	
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	DIN EN 846 part C	Does not favour growth
Underfloor heating	-	Suitable - max 27°C

The above information is subject to modifications for the benefit of further improvement (07/2015).
For more detailed technical information, please contact Tarkett.

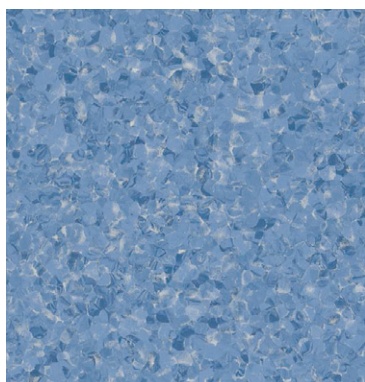

Medium blue

21012 569
21016 569

PRIMO SD

Main Product Features

- Economical ESD protection
- Electrical resistance of $R \leq 10^8$ Ohms
- 9 versatile colours available both in sheets and tiles
- Colour-coordinated with Primo Premium and Eclipse Premium

Sustainability Tag




Logistics Information



Available in rolls
Rolls length: 231m
Laying direction:



Available in tiles
Laying direction:



Play with the Room Designer