


iQ TORO SC




iQ Toro SC - 3093107




3093 100
3094 100



3093 101
3094 101




3093 102
3094 102




3093 103
3094 103




3093 104
3094 104



3093 105
3094 105




3093 107
3094 107




3093 570
3094 570



3093 572
3094 572




3093 573
3094 573



3093 574
3094 574




3093 575
3094 575



3093 578
3094 578

TECHNICAL DATA	STANDARDS	iQ Toro SC
Classification		
Type of floor covering	ISO 10582 (EN 649) - vinyl	Permanently static conductive pressed homogeneous vinyl flooring
Classification	ISO 10581 (EN 649) - vinyl domestic commercial light industrial	Classes: - 34 43
Characteristics		
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total thickness	ISO 24346 (EN 428)	2.00mm
Total weight	ISO 23997 (EN 430)	2 950g/m ²
Surface Treatment		iQ Pur
Flexibility	ISO 23344 (EN 435 Method A)	Pass
Technical performances		
Residual indentation	Average measured value	0.02mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _{fl} s1 ≥ 8 kW/m ² Pass
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40% for rolls ≤ 0.25% for tiles
Castor chair test	ISO 4918 (EN 425)	Suitable
Thermal resistance Underfloor heating	EN ISO 10456 (EN 12524)	0.01m ² K/W Suitable
Thermal resistance	DIN 52612/EN 12667	Approx. 0.01m ² K/W
Light fastness	EN ISO 105-B02	> level 7
Abrasion group Volume loss	EN 660: Part 2	Group P: ≤ 4.0mm ³
Electrical insulation	VDE 100, Part 600	R _i ≤ 5 x 10 ⁴ ohms
Static electrical charge	EN 1815	< 2kV
Electrical resistance	ESD-approval SP-method 2472 EN 1081 EN/IEC 61340-4-1, 100 V EN/IEC 61340-4-5	R ≤ 10 ⁸ ohms R ₁ 5 x 10 ⁴ ≤ R ≤ 10 ⁶ ohms R ₂ 5 x 10 ⁴ ≤ R ≤ 10 ⁶ ohms 5 x 10 ⁴ ≤ R ≤ 10 ⁶ ohms ≤ 3.5 x 10 ⁷ ohms
Chemical resistance	ISO 26987 (EN 423)	Excellent
Fungi and bacteria resistance	DIN EN 846 part C	Does not favour growth
Underfloor heating	—	Suitable - max 27°C

The above information is subject to modifications for the benefit of further improvement (07/2015).
For more detailed technical information, please contact Tarkett.

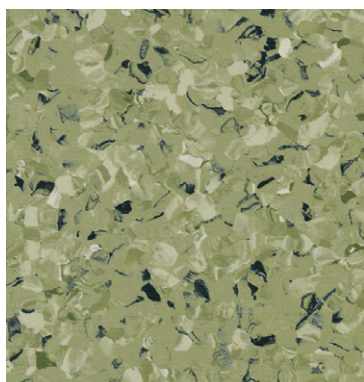

3093 576
3094 576

iQ TORO SC

Main Product Features

- 14 colours available both in sheets and tiles
- Colour coordinated with iQ Granit
- $5 \times 10^4 \leq R \leq 10^6$ ohms
- Unique patented conductive iQ PUR

Surface Treatment



Sustainability Tag




Logistics Information



Available in rolls
Rolls length: 231m
Laying direction:



Available in tiles
Laying direction:



General Information



Play with the Room Designer