

# COMPLETE

## Loft Ladder


### Insulated Loft Ladder With Wooden Frame

#### ADVANTAGES

- Checked DIN EN 14975 (2010)
- Insulated loft ladder with insulated hatch 33 mm thick
- U-value 1,1 W/m<sup>2</sup>K
- No joints on all around seal
- Hatch both sides white
- Opener recessed in hatch
- Strong solid wooden frame 27 mm thick
- Special strong 27 mm steps
- Steel safety handrail
- Equipped with stair shoes
- Completely assembled ready to fit
- Holds weight of 150 kg

#### OPTIONS

- ISO-upper lid set (plus 87)
- Paneling Minka Fix 27 mm
- Hatch safety rail
- Blower-Door-Set

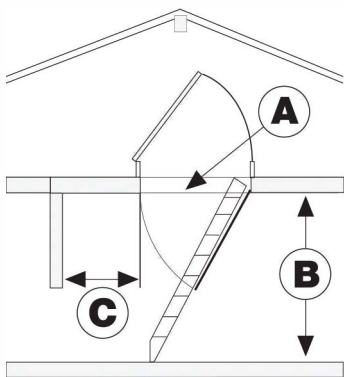

A rough opening size	frame size	B floor to ceiling height	C landing space	item no.	ISO-OD Plus 87
120/54 <sup>1)</sup>	119/53/13	-280	55	10340	10704
120/60	119/59/13	-280	55	10343	10713
120/70	119/69/13	-280	55	10344	10714

1) no safety rail