

PREMIUM



High quality homogeneous vinyl floorings suitable for a wide range of uses, from education and healthcare to offices and public buildings

SENSORIAL BENEFITS

- 102 modern colour palette including enriched neutrals selection
- 18 core matching and best-selling colours in every range
- Unique combination of three non-directional patterns for complete aesthetic coherence
- Multicolour welding rods for perfect finishing

FUNCTIONAL BENEFITS

- The Premium range combine all required functions - Acoustic, SD and Safe.T - together with matching colours
- No additional surface treatment needed
- Flexible flooring solutions for perfect coving results and improved maintenance
- Specially designed for heavy traffic zones where hygiene and resistance are critical such as schools, hospitals and public building

ENVIRONMENTAL BENEFITS

- Produced with phthalate-free technology
- Extremely low VOC emissions
- Significantly reduces use of water, energy and chemical detergents for a better environmental footprint and excellent life-cycle cost


Homogeneous vinyl flooring:
No additional surface treatment
needed



**PRIMO PREMIUM
ECLIPSE PREMIUM**

1 Homogeneous vinyl flooring:
No additional surface treatment
needed

2 Foam underlayer:
provides up to 17dB impact sound
reduction and walking comfort

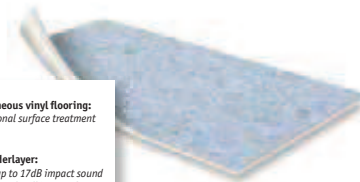

PRIMO ACOUSTIC

TECHNICAL DATA	STANDARDS	Primo Premium	Eclipse Premium	Primo Acoustic
Classification				
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43	Classes: 34 43	Classes: 34 42
UPEEC Classification	UPEEC Classification	U4 P3 E2/3 C2		U4 P3 E2/3 C2
	Impact sound reduction EN ISO 717/2	-		Approx. +17dB
	Acoustic improvement NF 531-074	-		L _{w,eq} < 65dB Class A
Characteristics				
Total thickness	ISO 24346 (EN 428)	2.00mm		2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm		2.00mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²	3 000g/m ²	3 600g/m ²
Surface treatment	-	PUR Reinforced		PUR Reinforced
Abrasion group	EN 660-2	Group P: ≤ 4.00mm ³		Group P: ≤ 4.00mm ³
Technical performances				
Residual indentation	Average measured value	0.03mm		-
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _s s1 ≥ 8 kW/m ² Pass		Class B _s s1 ≥ 8 kW/m ² Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%		Rolls: ≤ 0.40% Tiles: ≤ 0.25%
Castor wheel test	ISO 4918 (EN 425)	Suitable		Suitable
Static electrical charge	EN 1815	< 2kV	< 2kV	-
Light fastness	EN ISO 105-B02	≥ level 6		≥ level 6
Chemical resistance	ISO 846: Part C	Good resistance		Good resistance
Fungi and bacteria resistance	ISO 26987 (EN 423)	Does not favour growth		Does not favour growth
Clean room test	ISO 14644-1	Class 4	-	Class 4
	ASTM F51/00	Class A		Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3		R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C		Approx. 0.01m ² K/W Suitable - max. 27°C
Form of delivery	ISO 24341 (EN 426) ISO 24342 (EN 427)	Sheet (rolls): 231m x 2m Tiles: 61 x 61cm	Sheet (rolls): 231m x 2m Tiles: 61 x 61cm and 30 x 30cm	Sheet (rolls): 231m x 2m
Colours	EN 12667 / DIN 52612	36	66	18


The above information is subject to modifications for the benefit of further improvement (05/2014).

For more detailed technical information, please contact Tarkett.



Download the product offer

PRIMO PREMIUM

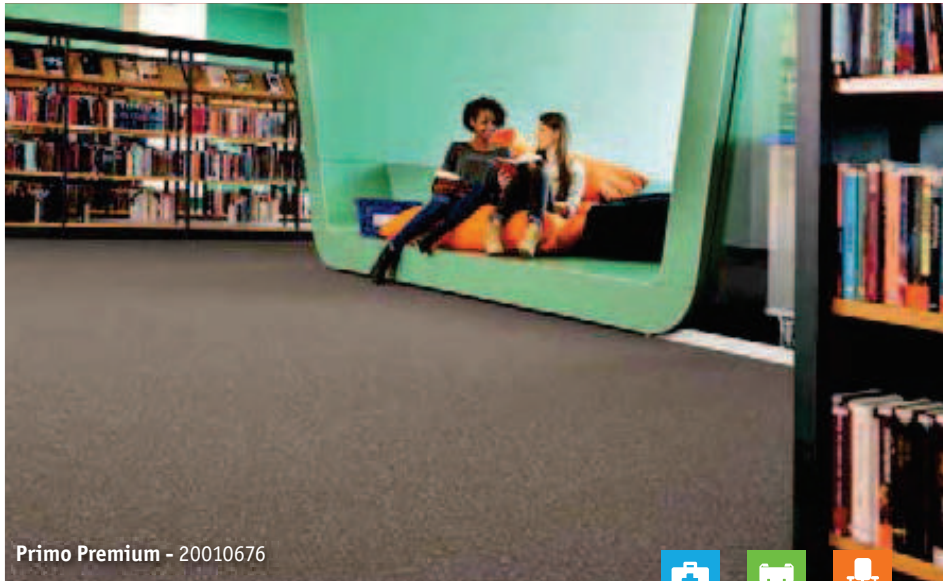

Primo Premium - 20010676



Light Pure Grey	Medium Pure Grey	Medium Dark Pure Grey	Light Warm Grey	Medium Cool Grey
21010 651 21014 651 21011 651	21010 670 21014 670 21011 670	21010 671 21014 671 21011 671	21010 672 21014 672 21011 672	21010 673 21014 673 21011 673
Dark Cool Grey	Black	Dark Cool Beige	Medium Cool Beige	Light Cool Beige
21010 674 21014 674 21011 674	21010 654 21014 654	21010 676 21014 676 21011 676	21010 657 21014 657 21011 657	21010 675 21014 675 21011 675
Dark Warm Beige	Medium Warm Beige	Light Beige	Medium Dark Warm Grey	Pure Grey
21010 659 21014 659 21011 659	21010 658 21014 658 21011 658	21010 678 21014 678 21011 678	21010 683 21011 683	21010 652 21011 652

TECHNICAL DATA	STANDARDS	Primo Premium	Primo Acoustic
Classification			
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43	Classes: 34 42
UPEC Classification	UPEC Classification	U4 P3 E2/3 C2	U4 P3 E2/3 C2
	Impact sound reduction EN ISO 717/2	-	Approx. + 17dB
UPEC Classification	Acoustic improvement NF S31-074	-	L _{w,eq} < 65dB Class A
	Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	2.00mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²	3 600g/m ²
Surface treatment	-	PUR Reinforced Group P: ≤ 4.00mm ³	PUR Reinforced Group P: ≤ 4.00mm ³
Abrasion group	EN 660-2	-	-
Technical performances			
Residual indentation	Average measured value	0.03mm	-
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _{s1} ≤ 1 ≥ 8 kW/m ² Pass	Class B _{s1} ≤ 1 ≥ 8 kW/m ² Pass
	Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%
Castor wheel test	ISO 4918 (EN 425)	Suitable	Suitable
Static electrical charge	EN 1815	< 2kV	-
Light fastness	EN ISO 105-B02	≥ level 6	≥ level 6
Chemical resistance	ISO 846: Part C	Good resistance	Good resistance
Fungi and bacteria resistance	ISO 26987 (EN 423)	Does not favour growth	Does not favour growth
Clean room test	ISO 14644-1	Class 4	-
	ASTM F51/00	Class A	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	R9 ≥ 0.3
	Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (05/2014).
For more detailed technical information, please contact Tarkett.

Dark Warm Grey	Medium Cool Beige
21010 656 21011 656	21010 684 21011 684
Medium Grey Beige	
21010 655 21011 655	

PRIMO PREMIUM

Main Product Features

- Multi-solution offer
- No additional surface treatment needed
- Flexible flooring solutions for perfect covering results and improved maintenance
- Extremely low VOC emissions
- Excellent life-cycle cost

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 231m
Laying direction:

Available in tiles
Laying direction:


General Information

Primo Premium
0010-0018-00P-2013-07
http://professionals.tarkett.com
Manufactured by Tarkett AB
SE-372 81 Rönneby, Sweden
According to European
Classification ISO 10874 (EN 685)


Primo Acoustic
0010-0050-00P-2013-07
http://professionals.tarkett.com
Manufactured by Tarkett AB
SE-372 81 Rönneby, Sweden
According to European
Classification ISO 10874 (EN 685)

Play with the Room Designer

PRIMO PREMIUM

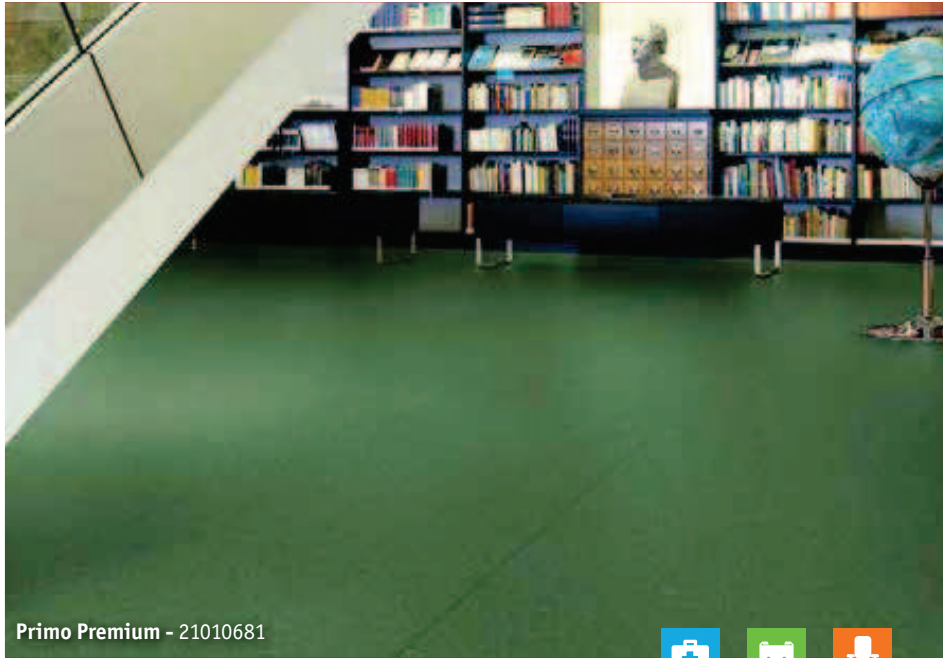


Primo Premium - 21010681

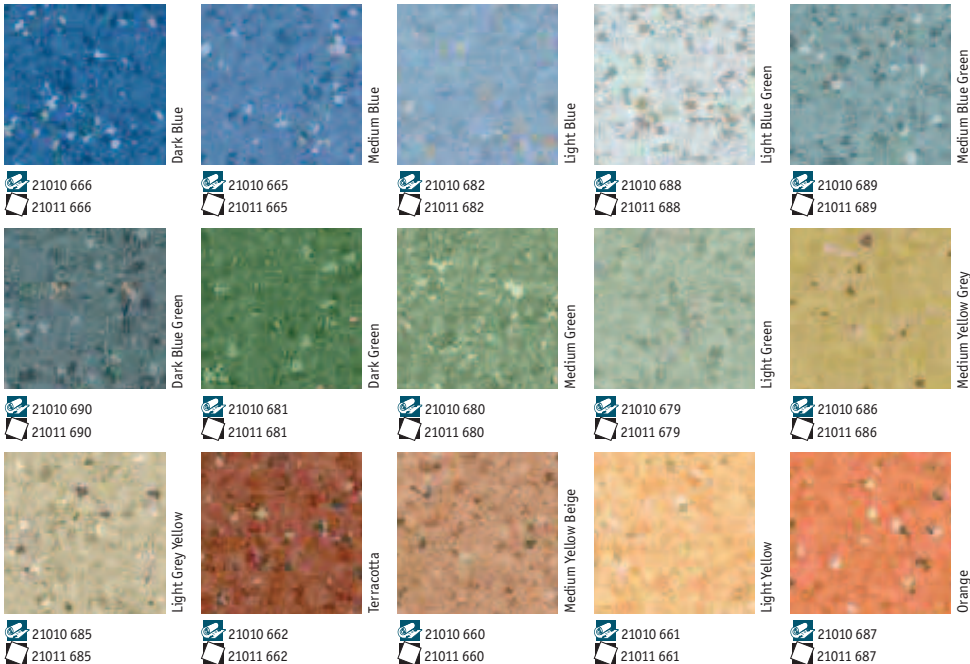

TECHNICAL DATA	STANDARDS	Primo Premium
Classification		
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43
UPEC Classification	UPEC Classification	U4 P3 E2/3 C2
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²
Surface treatment	-	PUR Reinforced
Abrasion group	EN 660-2	Group P: ≤ 4.00mm ³
Technical performances		
Residual indentation	Average measured value	0.03mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _s s1 ≥ 8 kW/m ² Pass
	Dimensional stability	ISO 23999 (EN 434)
Castor wheel test	ISO 4918 (EN 425)	Suitable
Static electrical charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ level 6
Chemical resistance	ISO 846: Part C	Good resistance
Fungi and bacteria resistance	ISO 26987 (EN 423)	Does not favour growth
Clean room test	ISO 14644-1	Class 4
	ASTM F51/00	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
	Thermal resistance Underfloor heating	EN 12667 / DIN 52612

The above information is subject to modifications for the benefit of further improvement (05/2014).
For more detailed technical information, please contact Tarkett.

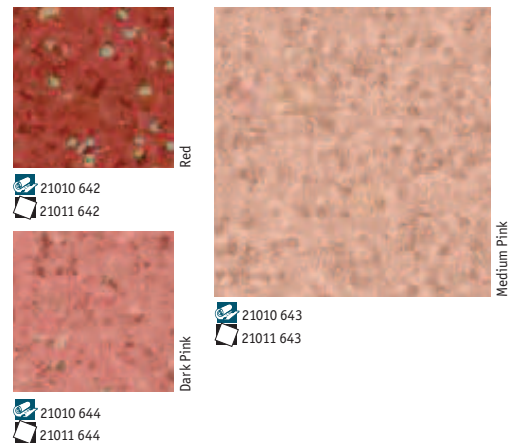

PRIMO PREMIUM

Main Product Features

- Multi-solution offer
- No additional surface treatment needed
- Flexible flooring solutions for perfect covering results and improved maintenance
- Extremely low VOC emissions
- Excellent life-cycle cost

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 231m
 Laying direction:

Available in tiles
 Laying direction:

General Information

