



RENOLIT ALKORSOLAR – Carrier System


The unique **RENOLIT ALKORSOLAR** profile allows for a multitude of creative possibilities in extending a façade over the surface of a **RENOLIT ALKORPLAN** single ply roof. It combines the efficiency of a single layer waterproofing system with a totally different decorative finish.

The P-PVC profile and aluminium box section combination are hot air welded to the surface of the membrane, providing a solid mounting to be counterbraced with timber or aluminium. **RENOLIT ALKORSOLAR** profile is light weight and non-penetrative to the waterproofing layer.

A client may choose to over-clad with a variety of decorative finishes, including materials not normally used on low pitches.

RENOLIT ALKORSOLAR profile has been used to carry anodised aluminium panels, cedar shingles, brick slips, timber planking, aluminium composite panels, high pressure laminate, slates and tiles to name but a few. Providing the benefit of single ply waterproofing with an individual finish.

APPLICATION

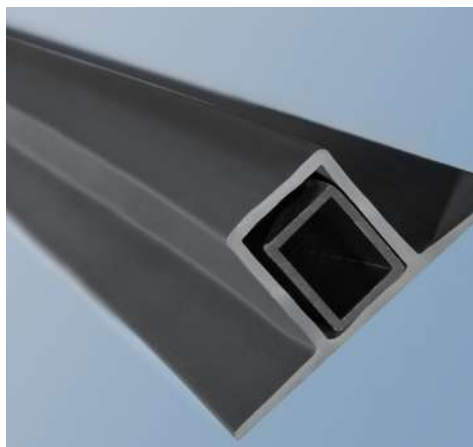

COMPATIBILITY

RENOLIT ALKORSOLAR – Carrier is compatible with **RENOLIT ALKORPLAN F** mechanically fixed and **RENOLIT ALKORPLAN A** fully bonded systems

It is suitable for low and severe pitches on both new build and refurbishment.

For further information please contact **RENOLIT Technical**.

SUPPORT

- System drawings
- J42 Specification
- Wind load calculation
- Technical advice
- Approved Contractor network
- Warranty



Issue 01/April 2018

www.renolit.com/waterproofing-roofing/en/

RENOLIT Cramlington Ltd - Station Road, Cramlington, Northumberland NE23 8AQ - United Kingdom

T +44 1670 718283 - F +44 1670 718367 - renolit.cramlington@renolit.com



Rely on it.