

CI/SfB	(29)	(K2)
CAW P10		
Uniclass JP10:L68114		

## Product Information

### Description

FP333 Trunking Infill is a fire resistant compressible foam strip layered with high expansion intumescent material produced in three sizes. In a fire, the intumescent expands and hardens providing a fire and cold smoke barrier.

### Usage / Purpose

FP333 is designed to provide a permanent fire barrier within trunking boxes passing through fire compartment walls.

They are of particular use where there are regular changes in cabling requiring frequent removal and replacement, for example in computer or communication installations.

### Colour

Black

### Available Sizes

29 mm X 47 mm X 333 mm  
 29 mm X 97 mm X 333 mm  
 29 mm X 147 mm X 333 mm  
 to suit 50/100/150 mm trunking box widths.

### Packaging

Available in individual units.

### Availability

Direct from Tremco CPG UK Limited (see details on this TDS).

## Usage Guidelines

Always read SDS, pre-application guidance and relevant application detail prior to application. Ensure the latest documents are downloaded prior to every project commencement.



### Installation

NOTE: Electric trunking boxes may only be opened by a qualified/competent person.

- Level cables to bottom of trunking box
- Insert FP333 within the trunking box above cables until height of lid is reached or slightly exceeded. Ensure FP333 is within the compartment line, either centrally if conditions allow, or a minimum 25 mm insertion into the compartment line is acceptable if access prevents a central location being achieved (tested in a non-symmetrical configuration to evidence the above statement).
- Replace the lid.

### Storage

Store in dry ambient conditions up to +70°C.


### Shelf Life

Unlimited when stored as recommended.

**Nullifire**  
Smart Protection

# FP333

## Trunking Infill

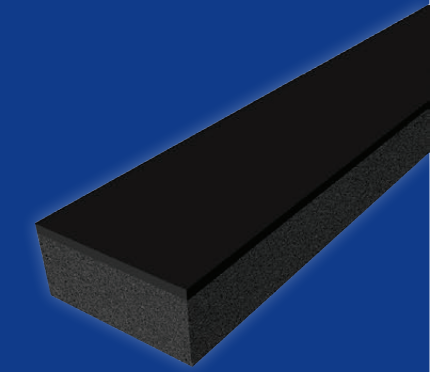

### Key Benefits Summary

- Up to 2 hours fire performance - Tested en BS EN 1366-3
- Integrity, insulation and smoke seal
- Zero fibre migration
- Three standard sizes to allow for complicated service conditions



# FP333

## Trunking Infill

**Nullifire**  
Smart Protection

### Health & Safety Precautions

Safety data sheet must be read and understood before use.

### Technical Service

Tremco CPG UK Limited has a team of experienced Technical Sales Representatives who provide assistance in the selection and specification of products. For more detailed information, service and advice, please call Customer Services on 01322 551010.

### Guarantee / Warranty

Tremco CPG UK Limited products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with Tremco CPG UK Limited written instructions and (b) in any application recommended by Tremco CPG UK Limited, but which is proved to be defective, will be replaced free of charge.

No liability can be accepted for the information provided in this leaflet although it is published in good faith and believed to be correct.

Tremco CPG UK Limited reserves the right to alter product specifications without prior notice, in line with Company policy of continuous development and improvement.