

eurofire protect




**fire-restraining
wooden loft ladder**

Advantages:

- Fire-restraining EI245 according to EN 1363 and EN 1634
- U-value 0,667 W/m²
- air permeability class 4 according to Din EN 1026
- 60 mm strong insulated lid
- 2-point turning lock
- hinges on the inside
- strong solid wooden frame 27 mm thick
- Special strong 27 mm treads equipped with special grooves preventing slipping
- equipped with stair shoes and safety handrail
- holds weight 150 kg

Options:

- ISO-upper lid set (plus 87)
- hatch safety rail
- covering boards Minka Fix 27 mm
- Blower-Door-Set

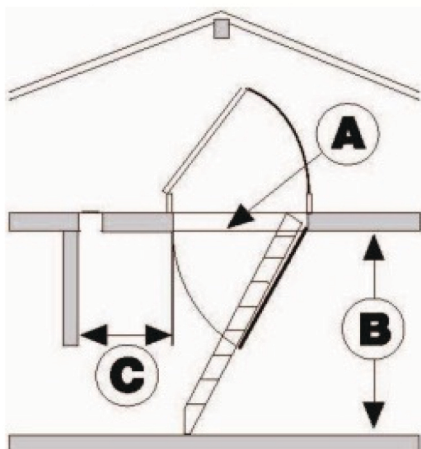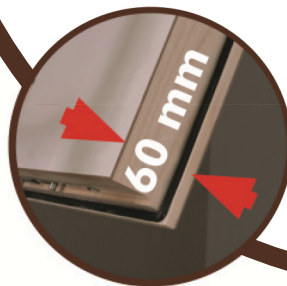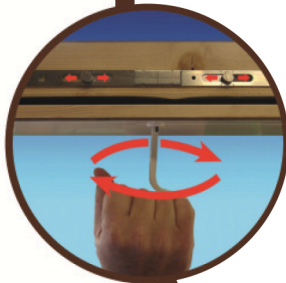

Technical Dimensions				Item No
A rough opening size	stair frame size	B floor to ceiling height	C landing space	
114/55	113/54/13	-275	61	10601
114/70	113/69/13	-275	61	10602
120/60	119/59/13	-275	55	10603
120/70	119/69/13	-275	55	10604