

FLOOR IS THE NEW PLAYGROUND



iD Selection 40


Choose from a wide range of colours, formats and accessories in a hardwearing and resistant flooring for semi-commercial use. iD Selection 40 has 30 on-trend designs inspired by authentic materials – light to darker woods & stone to metallic decors.





iD Selection 40

Give yourself the creativity and versatility to personalise your interior decor.



BISHOP MOVES

3 colours - Buy 1/3 of each colour*

Uses models:

Concrete - Dark Grege (226)

Concrete - Grey (225)

Rock - Natural Grey (228)

Tile format (cm): 50 x 50



CUBE

3 colours - Buy 4/9 of Dark Grege (226), 1/9 of Grey (225) and 4/9 of Natural Grey (228)*

Uses models:

Concrete - Dark Grege (226)

Concrete - Grey (225)

Rock - Natural Grey (228)

Tile format (cm): 50 x 50



SQUARED PALETTE

3 colours - Buy 1/3 of each colour*

Uses models:


Soft Walnut - Classical (202)

Concrete - Dark Grege (226)

Concrete - Grey (225)

Plank format (cm): 16.66 x 100

Tile format (cm): 50 x 50



SQUARED CHESS

3 colours - Buy 1/3 of each colour*

Uses models:

Soft Walnut - Classical (202)

Concrete - Dark Grege (226)

Concrete - Grey (225)

Plank format (cm): 16.66 x 100

Tile format (cm): 50 x 50

* Estimation based on this scaled square pattern



iD Selection 40

Give yourself the creativity and versatility to personalise your interior decor.




RAILWAY TRACK

4 colours - Buy 1/4 of each colour*

Uses models:

Antik Oak - Light Brown (208)
Rust Metal - Grey (223)
Rust Metal - Bronze (222)
Vintage Zinc - Alu (229)

Plank format (cm): 25 x 122
Tile format (cm): 30.5 x 61



LINEAR TOWER

3 colours - Buy 1/3 of each colour*

Uses models:

Antik Oak - Light Brown (208)
Rust Metal - Grey (223)
Rust Metal - Bronze (222)

Plank format (cm): 25 x 122
Tile format (cm): 30.5 x 61



RYTHMICAL PULSE

3 colours - Buy 1/6 of Light Brown, 1/6 of White and 4/6 of Bronze*

Uses models:

Antik Oak - Light Brown (208)
Antik Oak - White (209)
Rust Metal - Bronze (222)

Plank format (cm): 25 x 122
Tile format (cm): 30.5 x 61



ACCORDION

3 colours - Buy 1/6 of Light Brown, 1/6 of White and 4/6 of Grey*

Uses models:

Antik Oak - Light Brown (208)
Antik Oak - White (209)
Rust Metal - Grey (223)

Plank format (cm): 25 x 122
Tile format (cm): 30.5 x 61

* Estimation based on this scaled square pattern

PLANK



iD Selection 40

TILE



VINTAGE ZINC - ALU

4644 229
30.5 x 61 cm



RUST METAL - GREY

4644 223
30.5 x 61 cm



RUST METAL - BRONZE

4644 222
30.5 x 61 cm



CONCRETE - GREY

4643 225
50 X 50 cm



CONCRETE - DARK GREGE

4643 226
50 X 50 cm



RUSTIC SLATE - CHARCOAL

4645 224
61 X 61 cm



ROCK - GREY

4643 227
50 X 50 cm



ROCK - NATURAL GREY

4643 228
50 X 50 cm



iD Selection 40

iD Selection 40 offers a high quality and comfortable flooring for everyone's daily experience. Its design flexibility and durability makes it a great choice for commercial interiors with light traffic from hotels, offices, stores and shops to aged care facilities.

CREATE YOUR OWN DECORATIVE LAYOUT

- Gives you the versatility to create unique interiors with a carefully chosen range of 30 colours and patterns, surface structures and variety of plank and tile formats.

GREAT RESISTANCE AND EASY CLEANING


- Treated with TopClean XP™ surface protection that hardens the surface and simplifies cleaning and maintenance through reduced use of water, energy and chemical detergents.

DESIGNED IN EUROPE AND MADE IN GERMANY

- Created by our design team in Europe to the latest trends explored in the Tarkett Observer design study.
- Made in Germany to benefit from our best-in-class industrial expertise. It guarantees a high quality, long-lasting flooring supported by a reactive distribution and excellent customer service.

A SUSTAINABLE SOLUTION

- 100% recyclable.
- Contributes to improved indoor air quality with VOC emissions below quantifiable level, less than 10ug/m³ after 28 days.
- Uses a phthalate-free technology, based on alternative plasticizers that can be used for sensitive applications such as the production of toys, food packaging and medical devices.

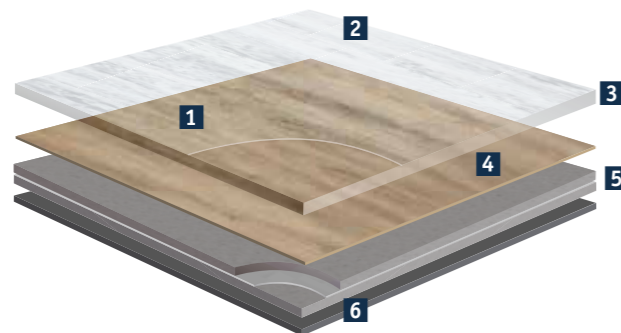

- 1. Surface embossing:** textures close to real materials
- 2. TopClean XP™ PUR reinforcement:** extreme resistance and easy low cost maintenance
- 3. 0.40mm pure PVC transparent wear layer:** exceptionally hardwearing and indentation resistant
- 4. 30 design options in high definition printing:** realistic designs
- 5. Unique composite structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre:** exceptional dimensional stability and excellent resistance to tear and indentation
- 6. PVC backing**

Accessories

Skirting



RIGID DECORATIVE SKIRTING WITH MATERIAL TO BE INSERTED

1448 ---
IS 60
(For straight walls, 10 x 60 x 2570 mm, 3 colours available).
Ordering unit: 20 units of 2.5 lm.

1462 ---
ISS 60
(for straight walls, 20 x 120 x 2570 mm, 6 colours available).
Ordering unit: 20 units of 2.5 lm.

Also available in flexible decorative skirtings (7 x 60 x 2500 mm).



LARGE DECORATIVE SKIRTING

8025 ---
Large laminate skirting (17 x 60 x 2400 mm, 21 LVT resembling colours available).
Ordering unit: 10 units of 2.4 lm.
Fixing system available: plastic clip holders.

Feature strip

Create visual effects with contrasts of colours to highlight interior features, shape perceptions of room size or personalise your flooring design in plank or tile arrangements. iD Selection 40 comes with 9 coloured feature lines for more creative design possibilities.

BLACK	1421 001
SILVER	1421 002
COPPER	1421 003
PHOSPHORESCENT	1421 005
GREEN	1421 006
TAUPE	1421 007
TOBACCO	1421 008
DARK GREY	1421 009
RED	1421 010

Tarkoflat Loose-lay

Ready-to-use solution

- Reduces slight unevenness in older subfloors by up to 1.5mm depth and 3mm width
- Prevents telegraphic effect, the appearance of bumps and ridges from the substrate by up to 1.5mm depth
- Residential and light traffic commercial applications (Class 32 max.)

Quick and easy to install*


Ref.: 3568 004 - Grey



*Tarkett recommend a selection of manufacturer adhesive (list available at: professionals.tarkett.com/content/list-recommended-adhesives). It is the responsibility of the adhesive manufacturer and flooring contractor to ensure the product being used is appropriate to use and applied in accordance with the manufacturer recommendations.

iD Selection 40


Profile

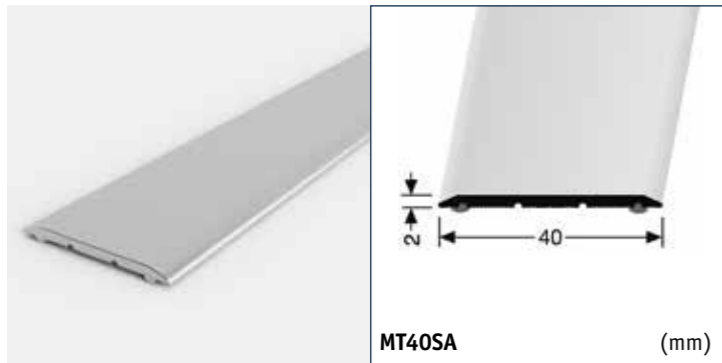

SELF-ADHESIVE TRANSITION PROFILE

Self-adhesive aluminium transition strip, for a perfect transition between different flooring materials. Suitable for use in heavy traffic areas.

1 colour: Ref.: Silver 1470 008
Delivery form: 10 units of 2.7 lm

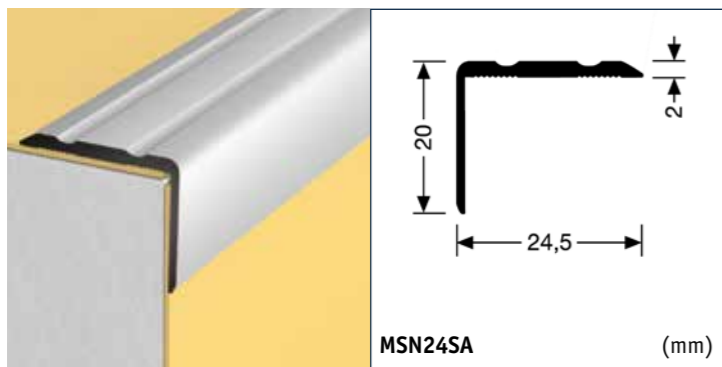

TRANSITION PROFILE

Aluminium transition profile, to be screwed.


1 colour: Ref.: Silver 1480 008
Delivery form: 10 units of 2.7 lm

Accessibility



WARNING TILE

Helps recognize a change in level, in accordance with regulatory requirements for disabled access and safety. Various formats available. Self-adhesive or to be glued to the floorcovering (according to product).




Self-adhesive rectangular tiles
Format: 815 x 420 x 8mm
Ordering unit: 1 box of 6 tiles

Self-adhesive square tiles
Format: 450 x 420 x 8mm
Ordering unit: 1 box of 20 tiles

Self-adhesive

	Rectangular tile	Square tile
White	1440 350	1440 450
Grey	1440 351	1440 451
Black	1440 352	1440 452
Ivory	1440 353	1440 453
Red	1440 354	1440 454
Yellow	1440 355	1440 455

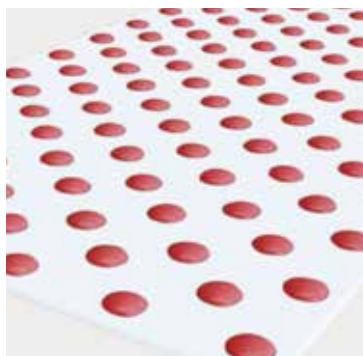

3D STUD

Ready-to-use podotactile studs to be simply fitted on top of the existing floorcovering.

Format (stud): 5 x 25mm
Ordering unit: 1 box of 200 studs

Self-adhesive

White	1440 050
Grey	1440 051
Black	1440 052
Ivory	1440 053
Red	1440 054
Yellow	1440 055

Specification

Modular vinyl floorcovering, with glass fibre reinforcement. TopClean XP™ polyurethane reinforcement. In plank and tile form. Product standard: ISO 10582.

CERTIFICATION & CLASSIFICATION	STANDARDS	iD Selection 40
Type of floor covering	EN ISO 10582	Compact Resilient Floorcovering
CE certification	EN 14041	Yes
Classification	EN ISO 10874	Domestic: 23 Commercial: 32 Industrial: 41
TECHNICAL CHARACTERISTICS	STANDARDS	iD Selection 40
Tota thickness	EN ISO 24346	2.2
Wear layer thickness	EN ISO 24340	0.4
Surface treatment (PUR)	-	Yes - TopCleanXP™
Beveled edges	-	No
Total weight	EN ISO 23997	3650 g/m ²
Wear layer binder content	ISO 10582	Type I
Form of delivery	EN ISO 24342	
	Planks	16,66 x 100 cm, 27 planks/box = 4,50 m ² 20 x 122 cm, 18 planks/box = 4,39 m ² 25 x 122 cm, 14 planks/box = 4,27 m ²
	Tiles	50 x 50 cm, 18 tiles/box = 4,50 m ² 30,5 x 61 cm, 23 tiles/box = 4,28 m ² 61 x 61 cm, 11 tiles/box = 4,09 m ²
TECHNICAL PERFORMANCES	STANDARDS	iD Selection 40
Dimensional stability	EN ISO 23999	≤ 0,10 %
Reaction to fire	EN 13501-1	Bfl-s1 glued over concrete substrate Cfl-s1 glued over wood substrate
Residual indentation	EN ISO 24343-1	≤ 0,05 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918	No damage
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Underfloor heating	-	Suitable - max. 27 °C
Thermal resistance	ISO 10456	0,02 m ² K/W
Impact sound reduction	EN ISO 717-2	2 dB
Reduction of in room impact noise	NF EN ISO 31-074	Class C (Ln,e,w < 85 dB)
Light fastness	EN ISO 105-B02 Method 3	≥ 6
Resistance to chemicals	EN ISO 26987	High resistance
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	<2 kV on concrete ≥ 10 ⁹ Ohm
Colours		30

Technical data in force upon the date of publication (11/15). The values correspond to laboratory tests (no in situ test) and are subject to modification. Tarkett's instructions regarding installation, cleaning and maintenance shall be observed. Please contact your local sales rep. for these instructions.

Our Sustainability tag explains the content of our products and how they contribute to our sustainability strategy and human well-being.

CUSTOMS TARIFF: 482050000000F

TARKETT SUSTAINABILITY TAG

100% 37% Recyclable Recycled content

PHTHALATE FREE Technology

<10 µg/m³ Optimal Indoor Air Quality

EMISSIONS DANS L'AIR INTÉRIEUR A+

SGS CERTIFICATIONS

EN 14041:2004 A2-s1 DS

Manufactured by: Tarkett GmbH 54320 Konz GERMANY

ISO 10582 - EN 649 iD Selection 40

According to European Classification ISO 10874 - EN 685

XP REINFORCED

NO WAX NO POLISH FOR LIFE

GARANTEE 10 years

FLOOR IS THE NEW PLAYGROUND

flooristhewnewplayground.tarkett.com

■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ Belgium: Tarkett France Belux – Tel. +32 16 35 98 80 ■ Denmark: Tarkett A/S – Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy – Tel. +358 9 4257 9000 ■ France: Tarkett SAS – Tel. +33 1 41 20 42 49 ■ Germany: Tarkett Holding GmbH, Bereich Objekt – Tel. +49 62 33 810 ■ Greece: Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ■ Italy: Tarkett S.p.A. – Tel. +39 0744 7551 ■ Luxembourg: Tarkett GDL SA – Tel. +352 949 211 8804 ■ Netherlands: Tarkett Holding GmbH, Vestiging Nederland – Tel. +31 76 57 80 760 ■ Norway: Tarkett AS – Tel. +47 32 20 92 00 ■ Portugal: Tarkett SA – Tel. +351 21 427 64 20 ■ Spain: Tarkett Floors S.L. – Tel. +34 91 358 00 35 ■ Sweden: Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ Switzerland: Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 043 233 79 24 ■ Turkey: Tarkett Aspen – Tel. +90 212 213 65 80 ■ United Kingdom: Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** Baltic Countries: Tarkett Baltics: Tel. +370 37 262 220 ■ Czech Republic: Tarkett France SAS, org. slozka – Tel. +420-271 001 602 ■ Hungary: Tarkett France SAS – Tel. +36 1 437 8150 ■ Poland: Tarkett Polska Sp. z o.o. – Tel. +48 22 639 31 68 ■ Russian Federation: ZAO Tarkett RUS – Tel. +7 495 775 3737 ■ Slovakia: Tarkett France SAS, org.zlozka – Tel. +421 248 291 317 ■ South East Europe: Tarkett Trade d.o.o. – Tel. +381 21 7557 649 (44) 569 12 21 ■ Ukraine: Tarkett UA – Tel. +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ China: Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ Hong Kong: Tarkett Asia Pacific Ltd. – Tel. +852 2511 8716 ■ India: Tarkett France (India Branch) – Tel. +91 11 4352 4073 ■ South East Asia: Tarkett Flooring Singapore Pte Ltd – Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ Israel: Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ Canada: Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett Fademac – Tel. 55 12 3954 7108 ■ Other countries: Tarkett America Latina – Tel. +55 11 3047 7200 ■ Argentina - Chile - Uruguay: Tarkett Latam Mercosur - Tel. 54 11 48 06 74 28 / 54 9 11 44 46 88 82 ■ Colombia - Panama - Caribbean: Tarkett Latam Andina – Tel. 57 1 759 5781 / 57 312 273 1566 ■ Bolivia - Ecuador - Paraguay - Peru: Tarkett Latam Sur Oeste - Tel. 55 11 3047 7233 ■ Mexico / Central America: Tarkett Latam Mexico - Tel. 52 735 35 63 918 / 52 55 51 07 9524



THE ULTIMATE
FLOORING EXPERIENCE